


VILLA LG DAISYLINK INSTALLATION

Components & Hardware



(A) Villa LG
Qty. 1



(B) Mounting Screw
#8 x.75", Qty. 10



(C) P-Clamp
Qty. 4



(D) Safety cover
Qty. 1

Tools Needed





For use with: Do not use provided screws on table thicknesses less than 1.00"

Note: *Use caution not to pierce top surface with screws. ECA System 42 connectors have been evaluated to prevent inadvertent contact with live parts. Connector openings are not required to be covered; however a cover is provided for use if desired, see detail below.

1- Provide 8.00" x 4.00" cutout at location Villa LG will be mounted. Corners can have a maximum of a .25" radius.

2- Attach Villa LG (A) to surface from underside using screws (B) provided as shown. Be sure to center receptacles in opening.

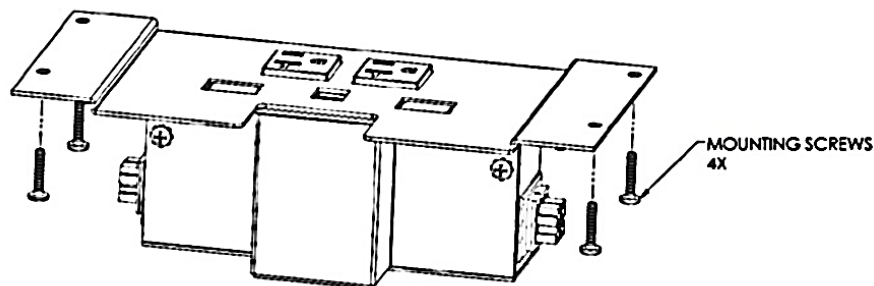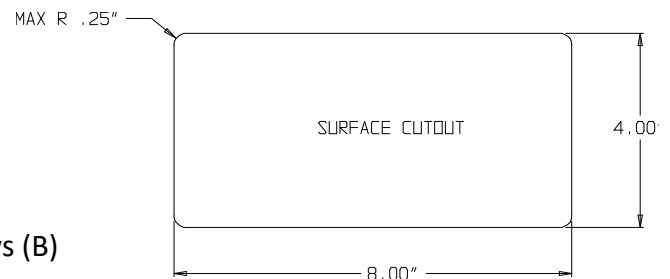

3- Connect all power and data cabling as needed.

4- Use P-Clamps (C) and remaining screws (B) to route cord and attach to underside of work surface as needed.

5- Slide safety cover (D) onto open male cable mount if desired.

Plug into an appropriate outlet that is properly installed and grounded in accordance with all local codes and regulations.

