




OASIS™ SERIES DAISYLINK™



PRODUCTIVITY- ENHANCING SOLUTIONS

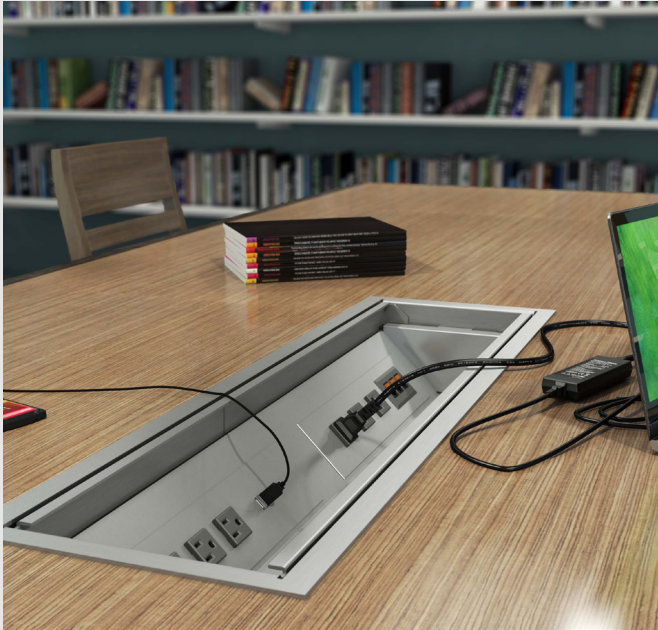

MODULAR CONNECTIVITY FOR CONFERENCING APPLICATIONS

Integrate innovative technology seamlessly within your conferencing applications using Oasis™ with DaisyLink™. The non-sequential 4 wire 2 circuit electrical system allows both tabletop and under table models to daisy-chain from a single infeed; delivering centralized locations to easily access power, USB, and data. The adaptable 30-inch table trough solutions keep power capabilities, wires and cords neatly contained thanks to the retractable two-panel closure lid or Trim Pivot Kit Lid options.











FEATURES:

Mounting Capabilities
 Bezel/In-Surface
 Under Table (UT)

Applications
 Conference/Meeting
 Collaborative Spaces

Standard Finishes*

Silver	
Black	
White	
Brushed Aluminum	
Black Brushed Aluminum	
Bronze	
Latte	
Carbon	


Trim Kit Lid Finishes (For UT Version Only)

Frosted Glass 


*Interested in our specialty finishes?
 Contact us for details.



POWER ONLY INSERT



POWER & DATA INSERT



POWER & USB INSERT



DATA ONLY INSERT

UNIT SPECIFICATIONS:


- 20A/120V AC Receptacles
- 2.1A/5V Shared; Dual USB Charging Ports *(Available on Select Models)*
- Customizable Telecom Plate Knockouts *(Available on Select Models; Plates Purchased Separately)*
- Used with 4 Wire 2 Circuit Starter and Interconnecting Cables *(Purchased Separately)*
- Hardwire Starter & Interconnecting Cable Lengths: Minimum 12" - 180" Maximum *(Specify in 1" Increments)*
- Circuit 1 and 2 Options - Link Up-to 40 Receptacles Across 2 Circuits *(US Only)*
- 30-Inch Table Trough - Tabletop and Under Table Models
- Fits Surface Thicknesses: 0.88" - 2.0"
- Fits Surface Cutout: 29.12" x 8.25" *(See Install Sheet for Additional Required Undercut Instructions)*
- Optional Outer Pan Accessory *(Purchased Separately)*
- Power Inserts - UL Listed for US and Canada

OASIS™ UT TRIM & LID PIVOT KIT SPECIFICATIONS:

- For Use with Under Table (UT) Models Only
- Trim Pivot Kit Includes Brushed Aluminum Components for Lid Assembly
- Fits Standard Oasis™ Surface Cutout *(Listed in Specs Above)*
- Fits Surface Thicknesses: 0.75" - 2.0"
- Includes Set of 2 Frosted Glass Lids - Must Be Used with Trim Pivot Kit *(Purchased Separately)*
 - Lid Thickness: 0.25"

DAISYLINK™ COMPONENTS


REFER TO DAISYLINK™ COMPONENTS PAGE IN ORDERING INFORMATION FOR DETAILS

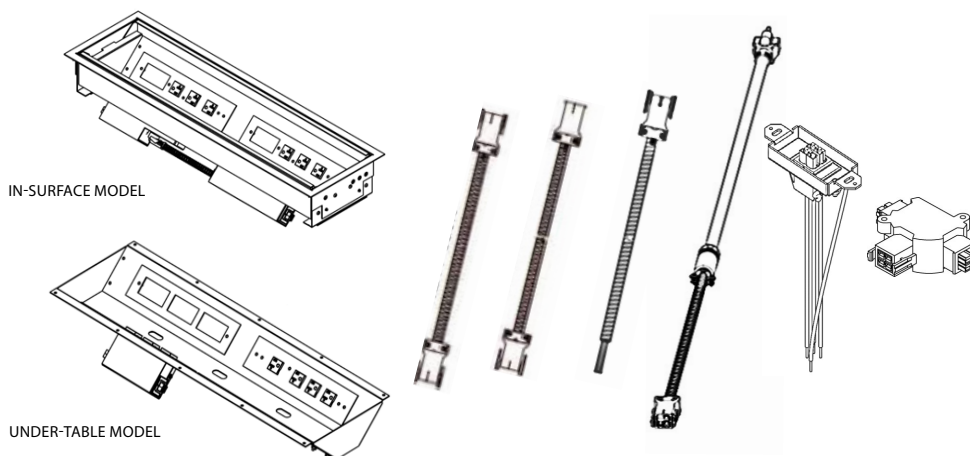

Mounting capabilities on following page...

In-Surface/Bezel (Featured to the right) -

- Easily integrate Oasis™ tabletop unit directly into the surface cutout. This model comes standardly equipped with a clever retractable lid that keeps wires and cables organized and out of sight. When closed, the unit sits nearly flush to the surface for an overall aesthetic finish.

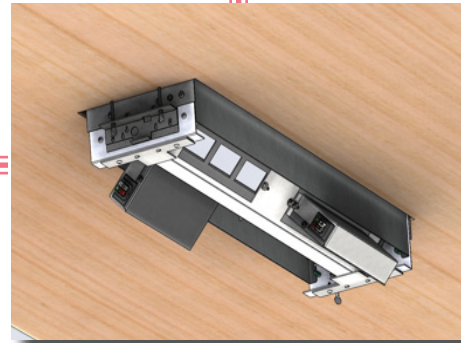*Under Table (UT) (Featured to the left) -*


- Oasis™ UT secures to the underside of the application for a completely recessed finish. When paired with the optional Trim & Lid Pivot Kits, the set of frosted glass lids flip open and close; providing easy access to integrated technology with additional cable management capabilities.

Looking for a customized finish? Fabricate your own lid (paired with the Trim Kit) to match your application for a flawless and cohesive aesthetic. *Note: Custom lids are not provided*




Series dimensions on following page...


OASIS™ A | POWER & DATA

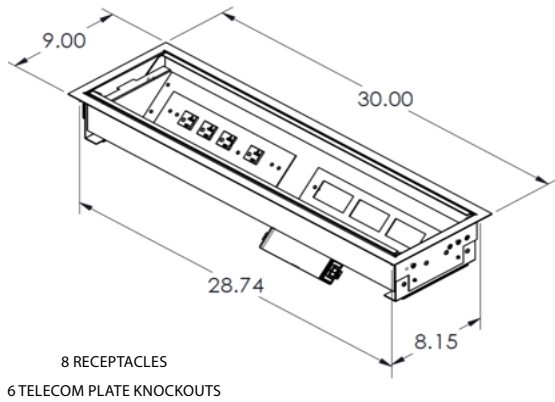


OASIS™ UT A | POWER & DATA

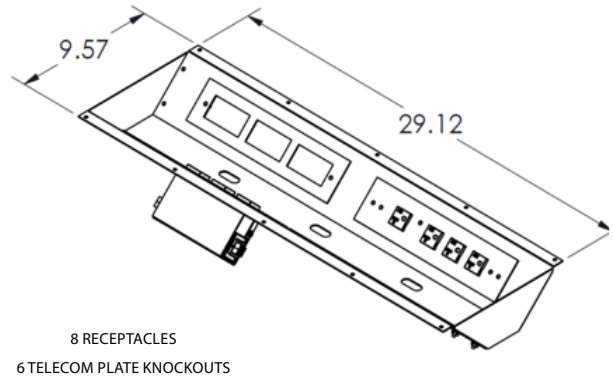


OASIS™ B | POWER & DATA

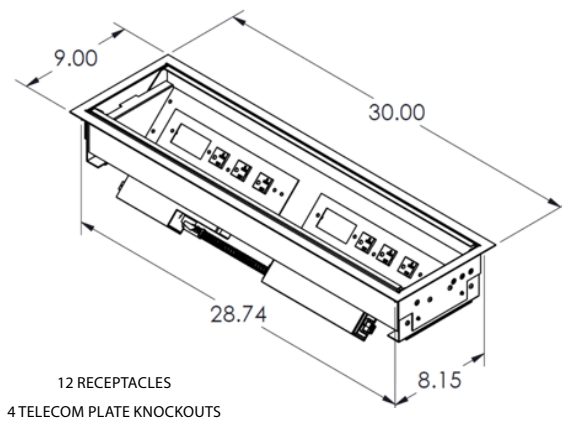


OASIS™ UT B | POWER & DATA

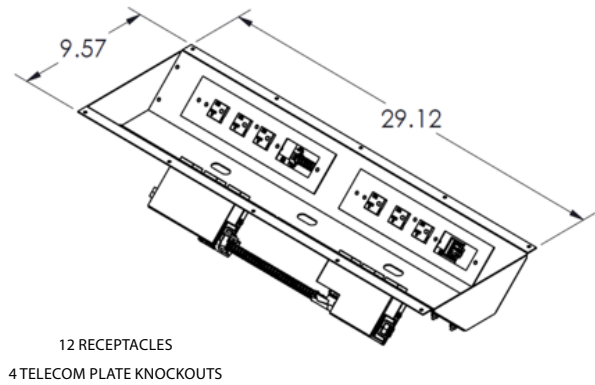

OASIS™ USB | POWER, USB & DATA

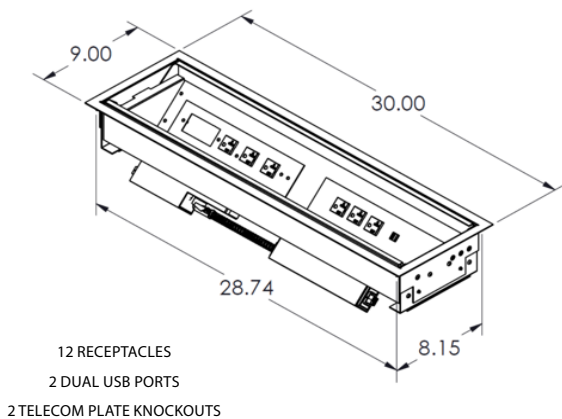


OASIS™ UT USB | POWER, USB & DATA

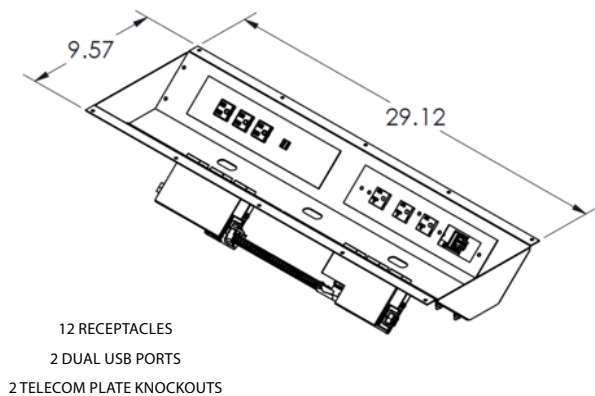


Continued on following page...

OASIS™ SERIES | OUTER PAN ACCESSORY

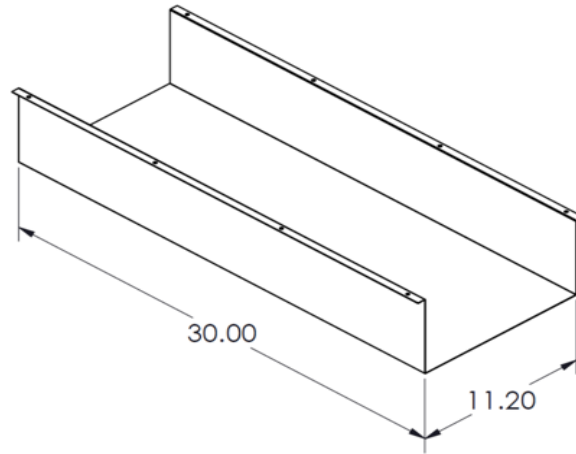

OASIS™ UT | LID & TRIM PIVOT KITS

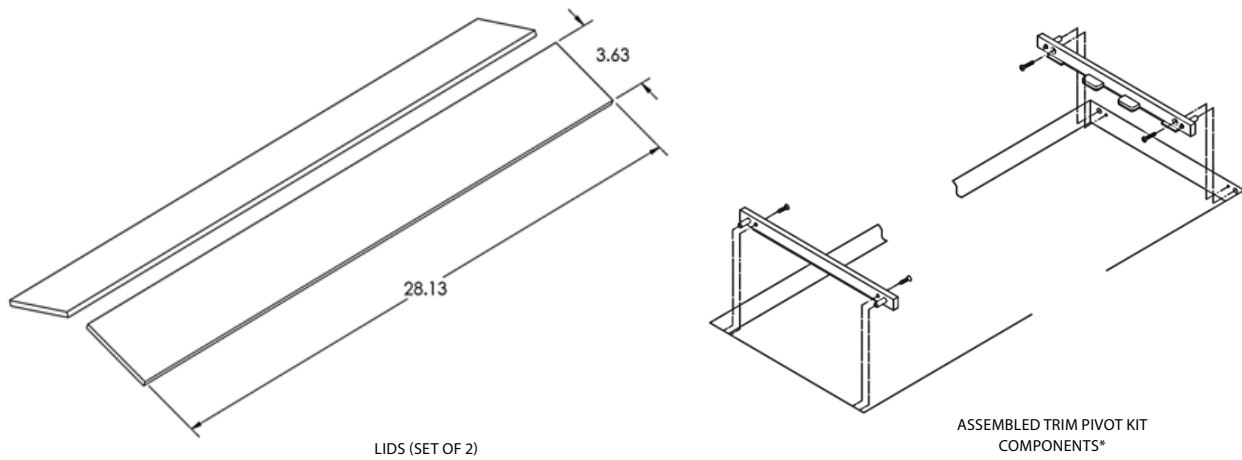

Refer to Trim Pivot Kit Installation Sheet for Lid & Trim Pivot Kit Assembly Directions

Ordering information on following page...

OASIS CONFIGURATIONS

	FINISH	PRODUCT NUMBER
OASIS A		
8 POWER, 6 TELECOM PLATE KNOCKOUTS, CIRCUIT 1, CORDED UNIT	SILVER	OAS-A-PC-4-1-S
	BLACK	OAS-A-PC-4-1-B
	WHITE	OAS-A-PC-4-1-GW
	BRONZE	OAS-A-PC-4-1-Z
	LATTE	OAS-A-PC-4-1-L
	CARBON	OAS-A-PC-4-1-C
	BRUSHED ALUMINIUM	OAS-A-4-1-S
8 POWER, 6 TELECOM PLATE KNOCKOUTS, UNDERMOUNT CIRCUIT 1 CORDED UNIT	BLACK BRUSHED ALUMINIUM	OAS-A-4-1-B
	SILVER	OASIS-UT-A-4-1-S
	BLACK	OASIS-UT-A-4-1-B
	WHITE	OASIS-UT-A-4-1-GW
	BRONZE	OASIS-UT-A-4-1-Z
	LATTE	OASIS-UT-A-4-1-L
	CARBON	OASIS-UT-A-4-1-C

OASIS B

12 POWER, 4 TELECOM PLATE KNOCKOUTS, CIRCUIT 1, CORDED UNIT	SILVER	OAS-B-PC-4-1-S
	BLACK	OAS-B-PC-4-1-B
	WHITE	OAS-B-PC-4-1-GW
	BRONZE	OAS-B-PC-4-1-Z
	LATTE	OAS-B-PC-4-1-L
	CARBON	OAS-B-PC-4-1-C
	BRUSHED ALUMINIUM	OAS-B-4-1-S
12 POWER, 4 TELECOM PLATE KNOCKOUTS, UNDERMOUNT CIRCUIT 1 CORDED UNIT	BLACK BRUSHED ALUMINIUM	OAS-B-4-1-B
	SILVER	OASIS-UT-B-4-1-S
	BLACK	OASIS-UT-B-4-1-B
	WHITE	OASIS-UT-B-4-1-GW
	BRONZE	OASIS-UT-B-4-1-Z
	LATTE	OASIS-UT-B-4-1-L
	CARBON	OASIS-UT-B-4-1-C

OASIS USB

12 POWER, 2 DUAL USB, 2 TELECOM PLATE KNOCKOUT, CIRCUIT 1, CORDED UNIT	SILVER	OAS-U-PC-4-1-S
	BLACK	OAS-U-PC-4-1-B
	WHITE	OAS-U-PC-4-1-GW
	BRONZE	OAS-U-PC-4-1-Z
	LATTE	OAS-U-PC-4-1-L
	CARBON	OAS-U-PC-4-1-C
	BRUSHED ALUMINIUM	OAS-U-4-1-AL
12 POWER, 2 DUAL USB, 2 TELECOM PLATE KNOCKOUTS, UNDERMOUNT CIRCUIT 1, CORDED UNIT	BLACK BRUSHED ALUMINIUM	OAS-U-4-1-B
	SILVER	OAS-UT-U-4-1-S
	BLACK	OAS-UT-U-4-1-B
	WHITE	OAS-UT-U-4-1-GW
	BRONZE	OAS-UT-U-4-1-Z
	LATTE	OAS-UT-U-4-1-L
	CARBON	OAS-UT-U-4-1-C

"BUILD YOUR OWN" INSERT CONFIGURATIONS AVAILABLE UPON REQUEST. CONTACT CUSTOMER SERVICE FOR CUSTOMIZATION DETAILS

CHANGE 4-1 TO 4-2 IN PART NUMBER TO SPECIFY CIRCUIT 2 CONFIGURATIONS


TELECOM PLATES SOLD SEPARATELY

LID AND TRIM KITS FOR UT VERSIONS SOLD SEPARATELY

CALL FOR PRICING

MOUNTING ACCESSORIES


OUTERPAN ACCESSORY (OPTIONAL):




A.

DESCRIPTION	FINISH	PART NUMBER
A. Oasis™ Outerpan - conceals underside of 30" Oasis Trough	Silver Pearl	OASIS PAN SLVR
	Black	OASIS PAN

OASIS™ UT LID & TRIM PIVOT KITS (OPTIONAL):

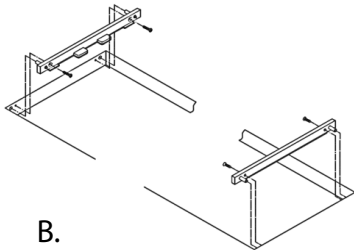

B.



C.


DESCRIPTION	FINISH	PART NUMBER
B. Trim Pivot Kit - components for lid assembly for Oasis™ UT Versions Only <i>(can be used alone, with custom lid, or provided lid options)</i>	Brushed Aluminum	OASIS UT LPA*
C. Lid Kit - Set of 2 glass lids to be used with Trim Pivot Kit	Frosted Glass	OASIS UT LG2*

*BOTH PART NUMBERS ARE REQUIRED FOR COMPLETE OASIS™ UT LID ASSEMBLY

DaisyLink™ components on following page...


DAISYLINK™ COMPONENTS

SELECT YOUR STARTER INFEED OPTION:

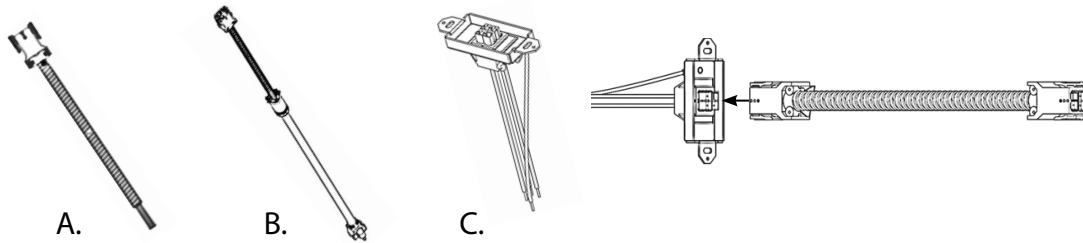

DESCRIPTION	LENGTH/FINISH	PART NUMBER
A. Hardwired multi-circuit starter infeed with female DaisyLink™ connector; hardwires into electrical junction box *Specify in increments of 1" Cable Lengths in Part Number	12" Min - 180" Max	42 SB2-XXX*
B. Molded 3-prong plug single-circuit starter power infeed with female DaisyLink™ connector; plugs directly into wall or floor outlet	72"	42 20AP1-72
C. Quick Disconnect multi-circuit wall/floor insert with male DaisyLink™ connector; wires into junction box to accept female DaisyLink™ interconnecting cable (To be used with 42 FF-XXX interconnecting cable - see below)	Black	42 QD Insert

CHOOSE YOUR INTERCONNECTING CABLES:

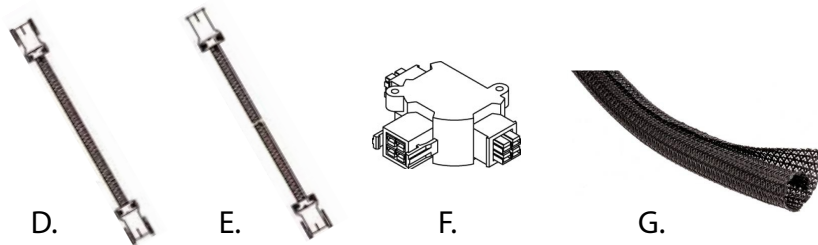

DESCRIPTION	LENGTH/FINISH	PART NUMBER
D. Female/Female Interconnecting Cable *Specify in increments of 1" Cable Lengths in Part Number	12" Min - 180" Max	42 FF-XXX*
E. Female/Male Interconnecting Cable *Specify in increments of 1" Cable Lengths in Part Number	12" Min - 180" Max	42 FM-XXX*
F. T-Connector used to branch cabling in different directions; 2 male and 1 female endings	Black	Daisy T
G. Nylon Black Cable Covers - Add "B" to cabling part number	Black	Cable Covers "B"

TO LEARN HOW TO CONFIGURE AND ASSEMBLE A 4 WIRE 2 CIRCUIT SYSTEM, SEE DAISYLINK™ SYSTEM LITERATURE FOR DETAILS - OR CONTACT OUR KNOWLEDGEABLE CUSTOMER SERVICE TEAM FOR ADDITIONAL SUPPORT