

STUDIO


BY DEKKO 2505 Dekko Drive
Garrett, IN 46738
Customer Service: 800.357.5622

ASHLEY DUO BEZEL

- Conduit Feed -
Horizontal & Vertical Surface Mounting
Installation Instruction

This device complies with part 15A of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Tools Required




1 Cutout Opening for Ashley Duo Bezel Assembly


*** NOTE ***

Max Radius on Cutout Corners is 1/4"

Thickness Range of
Mounting Surface
(3/4" to 1-1/2")

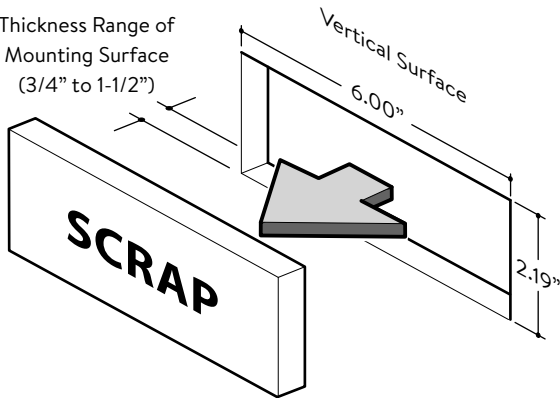

2 Install Ashley Duo Bezel Assembly into Cutout

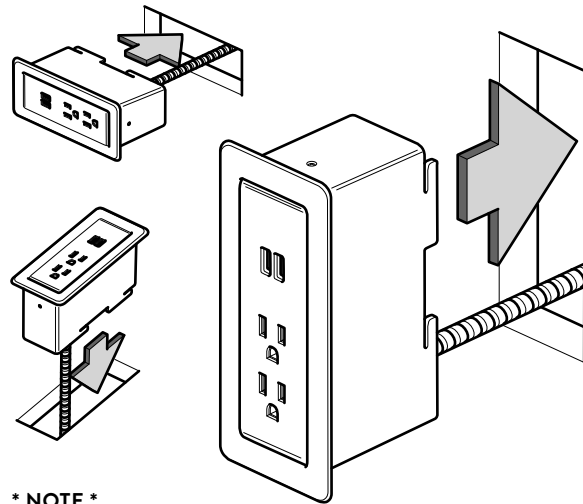


*** NOTE ***

Tabs Point Up when Unit is
Installed Vertically - See Vertical Orientation

3 Install Retainer Bracket

Vertical Surface
Back Side

* Align Tabs on Bezel with
Slots on Retainer Bracket
and Slide into Position *

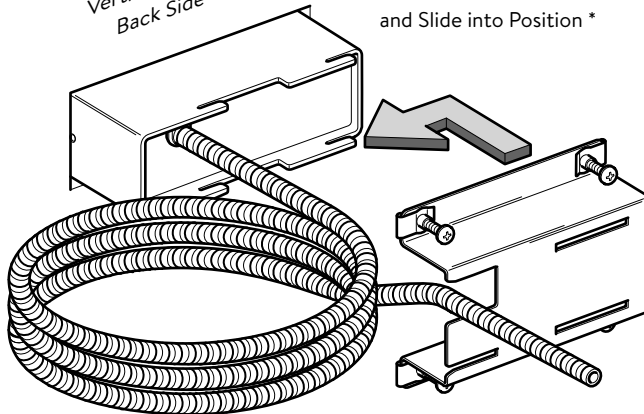


*** NOTE ***

Route Conduit Feed Through Notch in Retainer Bracket

4 Route Conduit Feed to Nearest Power Distribution Source

* Tighten (4) Screws to Secure
Unit to Worksurface *

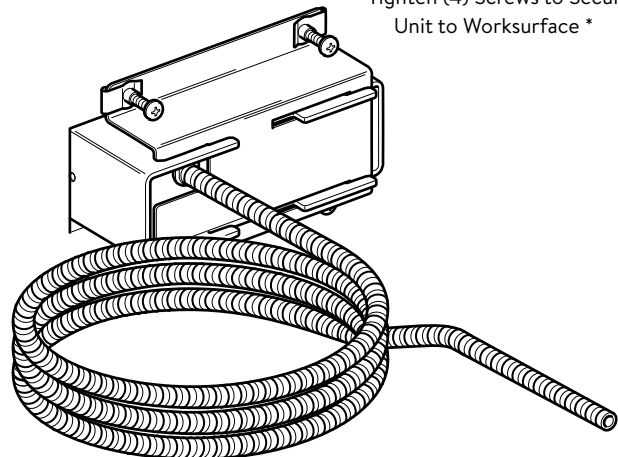

WIRE IDENTIFICATION

- LINE (BLACK)
- GROUND (GREEN)
- NEUTRAL (WHITE)

E.C.N. No: GD17-002964

Part Number: G110063

Page Number: 1 of 2

Revision: D



2505 Dekko Drive
Garrett, IN 46738
Customer Service: 800.357.5622

ASHLEY DUO BEZEL
- Conduit Feed -
Horizontal & Vertical Surface Mounting
Installation Instruction Template

This device complies with part 15A of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

