

REEF™

 ECA
BY DEKKO



REEF™ PROVIDES:

Soft & Effortless Lid-Closer Design

Dampened door design adds a soft touch when opening the lid and disappears into the furniture allowing easy access to all components inside the unit. Integrated brush trim helps keep debris from entering the unit and allows cords to exit the unit, even when the door is closed.

DaisyLink System Compatibility

Connect multiple units together from one power infeed. This system is ideal for installing multiple units within a table.

Individualized Customization

Various configurations and finish options allow you to select which unit is best for your application.

Enhanced USB Technology

Powerful 2.1 AMP USB's are coated and water resistant for protection against spills and can charge higher power devices such as tablets even when in use.

ETL Listed for US and Canada

**MODERNIZE
THE WORK
SPACE**

CONFERENCE ROOM POWER SOLUTIONS

Sometimes, sleeker is better. Modeled after our Oasis Mini, Reef integrates multiple 120 Volt power receptacles along with advanced USB and data capabilities to keep devices charged and accessible, and your day running seamlessly. Better indeed.



FEATURES:

Applications

Bezel / In-Surface
Conference Room

Standard Finishes

- Silver Pearl
- Black
- Gloss White
- Brushed Aluminum





Specifications

- 3 or 4 - 15A, 120VAC Power Receptacles
- 2.1A/10.5W USB Charging Ports
- 1 Convenience Outlet - Available on Corded Models Only
- 1 Telecom Plate Knockout - Fully Customizable (Purchased Separately)
- 2 Data Knockouts
- Corded, Hardwired & DaisyLink Options
- Standard Cord and Hardwire Conduit Whip Length: 108"
- Recommended Table Thickness: 1" - 2"
- Recommended Table Cutout: 5.38" x 15.25" (See Install Sheet for Additional Undercuts Required.)
- ETL Listed for US and Canada

Dimensions

- Reef Standard Dimensions: 16.10" x 6.25" x 4.89"

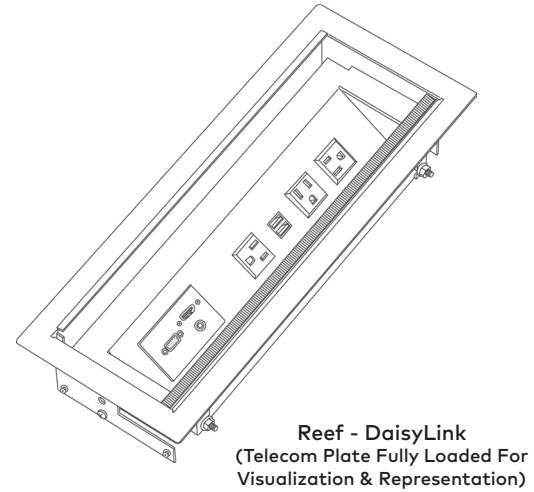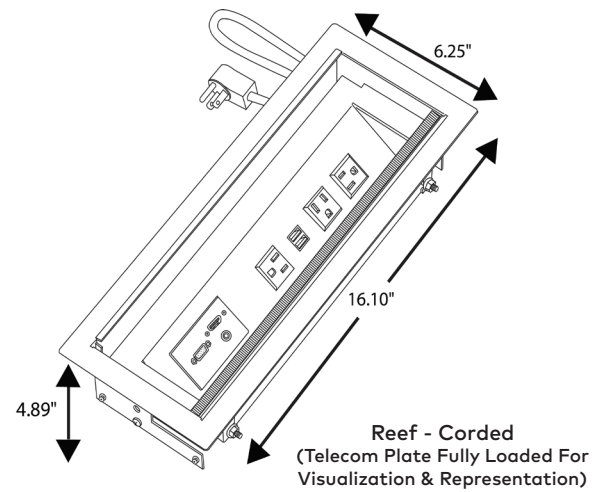

DESCRIPTION

FINISH

PART NUMBER

Reef™ - Corded

- | | | |
|--|--|--|
| <ul style="list-style-type: none"> • 3 Power, 1 Convenience, 2 2.1 AMP USB, 1 Telecom Plate Knockout, 2 RJ45 Knockouts, 108" Power Cord | <ul style="list-style-type: none"> Silver Pearl Black Gloss White Brushed Aluminum | <ul style="list-style-type: none"> REF-31U-S-108 REF-31U-B-108 REF-31U-GW-108 REF-31U-AL-108 |
| <ul style="list-style-type: none"> • 4 Power, 2 2.1 AMP USB, 1 Telecom Plate Knockout, 2 RJ45 Knockouts, 108" Power Cord | <ul style="list-style-type: none"> Silver Pearl Black Gloss White Brushed Aluminum | <ul style="list-style-type: none"> REF-4U-S-108 REF-4U-B-108 REF-4U-GW-108 REF-4U-AL-108 |

Reef™ - Hardwired

- | | | |
|--|--|--|
| <ul style="list-style-type: none"> • 3 Power, 1 Convenience, 2 2.1 AMP USB, 1 Telecom Plate Knockout, 2 RJ45 Knockouts, 108" Power Cord | <ul style="list-style-type: none"> Silver Pearl Black Gloss White Brushed Aluminum | <ul style="list-style-type: none"> REF-31U-S-HW108 REF-31U-B-HW108 REF-31U-GW-HW108 REF-31U-AL-HW108 |
| <ul style="list-style-type: none"> • 4 Power, 2 2.1 AMP USB, 1 Telecom Plate Knockout, 2 RJ45 Knockouts, 108" Power Cord | <ul style="list-style-type: none"> Silver Pearl Black Gloss White Brushed Aluminum | <ul style="list-style-type: none"> REF-4U-S-HW108 REF-4U-B-HW108 REF-4U-GW-HW108 REF-4U-AL-HW108 |

Reef™ - DaisyLink

- | | | |
|---|--|--|
| <ul style="list-style-type: none"> • 3 Power, 2 2.1 AMP USB, 1 Telecom Plate Knockout, 2 RJ45 Knockouts, DaisyLink | <ul style="list-style-type: none"> Silver Pearl Black Gloss White Brushed Aluminum | <ul style="list-style-type: none"> REF-4-1-3U-S REF-4-1-3U-B REF-4-1-3U-GW REF-4-1-3U-AL |
| <ul style="list-style-type: none"> • 4 Power, 2 2.1 AMP USB, 1 Telecom Plate Knockout, 2 RJ45 Knockouts, DaisyLink | <ul style="list-style-type: none"> Silver Pearl Black Gloss White Brushed Aluminum | <ul style="list-style-type: none"> REF-4-1-4U-S REF-4-1-4U-B REF-4-1-4U-GW REF-4-1-4U-AL |

Change "1" to a "2" to specify Circuit
See DaisyLink Starter & Interconnecting Cable Options Below.

DaisyLink Starter & Interconnecting Cable Options

- | | | |
|---|---|--|
| <ul style="list-style-type: none"> • Female/Female Interconnecting Cable | <ul style="list-style-type: none"> 12" -180" Cable | <ul style="list-style-type: none"> 42-FF-Length* |
| <ul style="list-style-type: none"> • Female/Male Interconnecting Cable | <ul style="list-style-type: none"> 12"-180" Cable | <ul style="list-style-type: none"> 42FM-Length* |
| <ul style="list-style-type: none"> • Hardwire Starter Cable | <ul style="list-style-type: none"> 12"-180" Cable | <ul style="list-style-type: none"> 42SB2-Length* |
| <ul style="list-style-type: none"> • T-Connector used to branch into different directions | <ul style="list-style-type: none"> Black | <ul style="list-style-type: none"> Daisy-T |
| <ul style="list-style-type: none"> • DaisyLink Nylon Black Cable Covers - Add "B" to cabling part number | <ul style="list-style-type: none"> Black | <ul style="list-style-type: none"> Cable Covers "B" |

Specify in increments of 1" Cable Lengths in Part Number.
Cable Lengths Minimum of 12" - 180" Maximum.