



VILLA™ BAR SERIES



MODESTY PANEL - INSPIRED

FLEXIBLE POWER OPTIONS

An unoccupied modesty panel is fair mounting-game when it comes to the Villa™ Bar. Its flexible mounting capabilities and slender frame take full advantage of unique areas like modesty panels by providing power and data in imaginable ways. The Series includes below-surface outlets to supply stationary components like lamps, monitors, and computers. Villa™ Bar is the perfect solution for linking multiple units together from one infeed using the DaisyLink™ System, so you can maximize power while eliminating excess wires and cords.



FEATURES:

Applications

Under-mount
Training Tables
Panel Systems

Standard Finishes

Silver Pearl
Black



VILLA™ BAR SERIES




Specifications

- 2 - 15A, 120V AC Power Receptacles
- 2 Data Knockouts (*Available on Select Models*)
- Convenience Outlets (*Available on Select Models*)
- Corded and DaisyLink Options
- Standard Cord Length: 36", 72" or 108"


- DaisyLink Configurations Compatible with the 4 Wire 2 Circuit Starter and Interconnecting Cables and Accessories
- 4 Cable Clamps & Mounting Screws Included for Installation
- UL Listed for US and Canada

Dimensions

- Villa™ Bar Corded Standard Dimensions: 1.95" x 8.63" x 2.31"
- Villa™ Bar DaisyLink™ Standard Dimensions: 1.62" x 7.63" x 1.87"

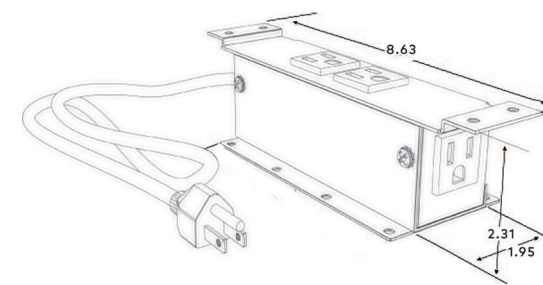

Corded Villa Bar

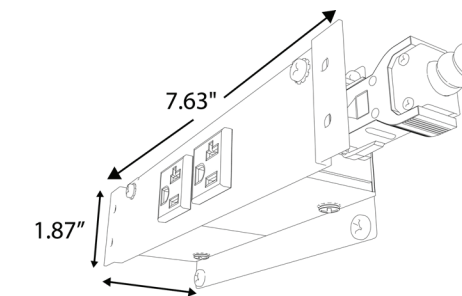

DaisyLink Villa Bar



DESCRIPTION	FINISH	PART NUMBER
-------------	--------	-------------

Villa™ Bar - Corded

• 2 Power with 72" Cord	Black	VIL-C-BAR-B-72
	Silver Pearl	VIL-C-BAR-S-72
• 2 Power and 2 Data Knockouts with 72" Cord	Black	VIL-C-BAR-KB-72
	Silver Pearl	VIL-C-BAR-KS-72
• 2 Power and 2 RJ45 Cat 6 Data with 72" Cord	Black	VIL-C-BAR-DB-72
	Silver Pearl	VIL-C-BAR-DS-72

Replace "72" in the listed Part Number with Appropriate Cord Length of your choice: 36", 72", or 108". Pricing is standard for these specified lengths.

NOTE: Cord lengths 144" and 180" require an additional up-charge fee. Unit comes equipped with 4 cable clamps and mounting screws.

Villa™ Bar Data Options

• RJ45 Siemon Cat 6, female/punch down, Black	Black	RJ45-B
• HDMI keystone female/female, Black	Black	HDMI-KEY-B
• USB 2.0 Type A/A Keystone female/female, Black	Black	USB-KEY-20AA-B
• USB 2.0 Type A/A Keystone female/female, White	White	USB-KEY-20AA-W

DESCRIPTION	FINISH	PART NUMBER
-------------	--------	-------------

Villa™ Bar - DaisyLink

• 2 Power	Black	VIL-4-1-BAR-B
	Silver Pearl	VIL-4-1-BAR-S
• 2 Power and 2 Data Knockouts	Black	VIL-41-BAR-DKOB
	Silver Pearl	VIL-41-BAR-DKOS
• 2 Power and 2 RJ45 Cat 6 Data	Black	VIL-4-1-BAR-D-B
	Silver Pearl	VIL-4-1-BAR-D-S

Change the "1" to a "2" to specify Circuit 2. See Starter and Interconnecting Cable Options Below.

DaisyLink Starter & Interconnecting Cable Options

• Female/Female Interconnecting Cable	12" -180" Cable	42-FF-Length*
• Female/Male Interconnecting Cable	12"-180" Cable	42FM-Length*
• Hardwire Starter Cable	12"-180" Cable	42SB2-Length*
• T-Connector used to branch into different directions	Black	Daisy-T
• DaisyLink Nylon Black Cable Covers - Add "B" to cabling part number	Black	Cable Covers "B"

Specify in increments of 1" Cable Lengths in Part Number. Cable Lengths Minimum of 12" - 180" Maximum.

Villa™ Bar Data Options

• RJ45 Siemon Cat 6, female/punch down, Black	Black	RJ45-B
• HDMI keystone female/female, Black	Black	HDMI-KEY-B
• USB 2.0 Type A/A Keystone female/female, Black	Black	USB-KEY-20AA-B
• USB 2.0 Type A/A Keystone female/female, White	White	USB-KEY-20AA-W

