


ASHLEY 210

- Conduit -
Above Worksurface Mounting
Installation Instruction


This device complies with part 15A of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Tools Required




Screwdriver needed for optional power cord mounting clamps.

1 Slide Bracket Behind Worksurface

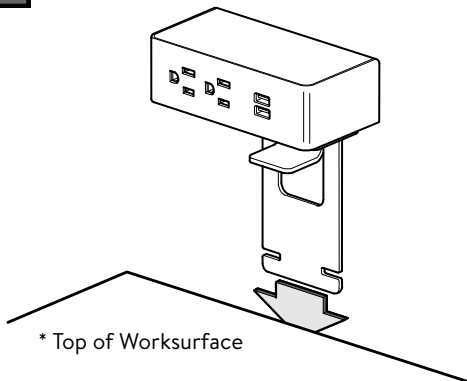

2 Install Bottom Bracket Under the Worksurface


* Underside of Worksurface *

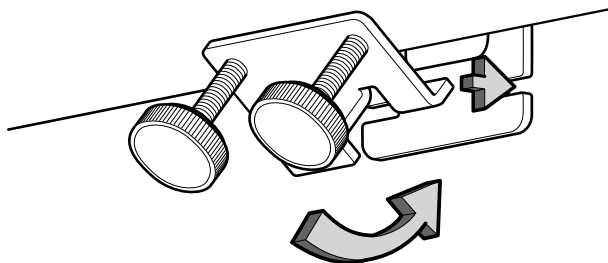

3 Secure Thumb Screws and Route Conduit Option to Nearest Power Distribution Source

* Underside of Worksurface *


Worksurface
Thickness Range
(3/4" to 1-1/2")

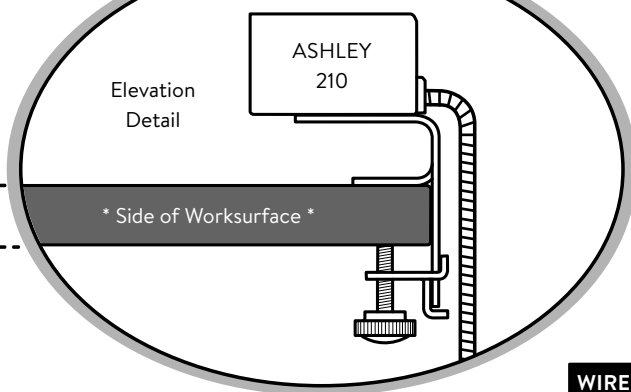

Elevation
Detail

ASHLEY
210

* Side of Worksurface *

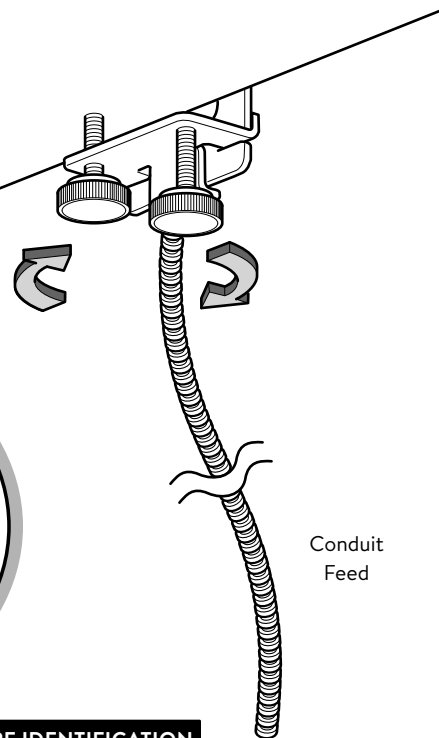

Conduit
Feed

WIRE IDENTIFICATION

- LINE (BLACK)
- GROUND (GREEN)
- NEUTRAL (WHITE)