

STUDIO


BY DEKKO 2505 Dekko Drive  
Garrett, IN 46738  
Customer Service: 800.357.5622

# ASHLEY DUO BEZEL

- Conduit Feed -  
Horizontal & Vertical Surface Mounting  
Installation Instruction

This device complies with part 15A of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

### Tools Required




## 1 Cutout Opening for Ashley Duo Bezel Assembly


**\* NOTE \***

Max Radius on Cutout Corners is 1/4"

Thickness Range of  
Mounting Surface  
(3/4" to 1-1/2")

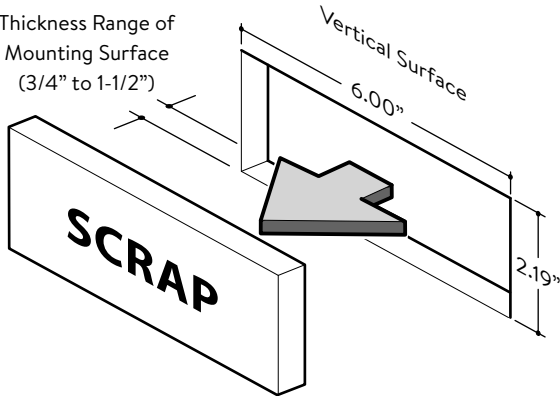

## 2 Install Ashley Duo Bezel Assembly into Cutout

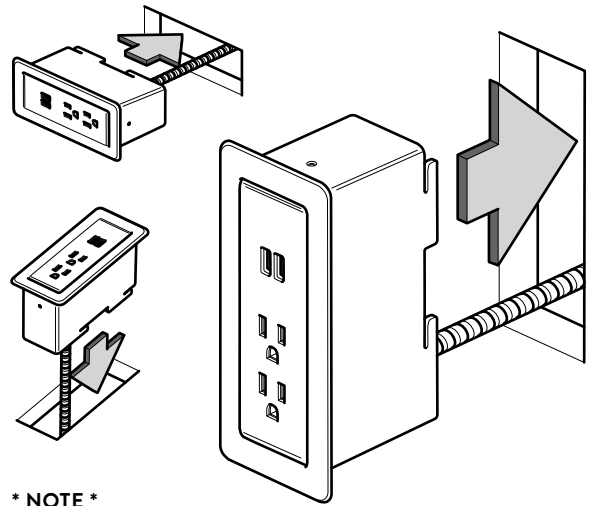


**\* NOTE \***

Tabs Point Up when Unit is  
Installed Vertically - See Vertical Orientation

## 3 Install Retainer Bracket

Vertical Surface  
Back Side

\* Align Tabs on Bezel with  
Slots on Retainer Bracket  
and Slide into Position \*

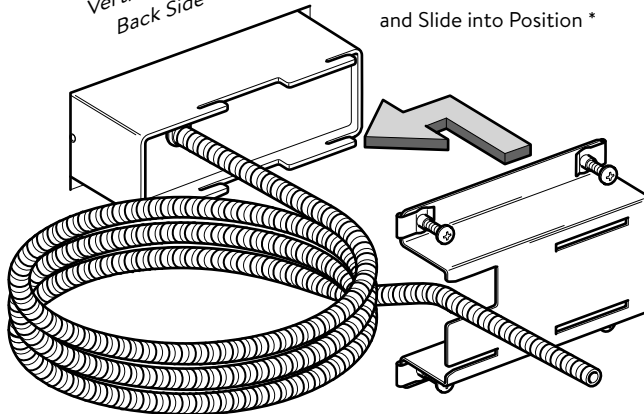


**\* NOTE \***

Route Conduit Feed Through Notch in Retainer Bracket

## 4 Route Conduit Feed to Nearest Power Distribution Source

\* Tighten (4) Screws to Secure  
Unit to Worksurface \*

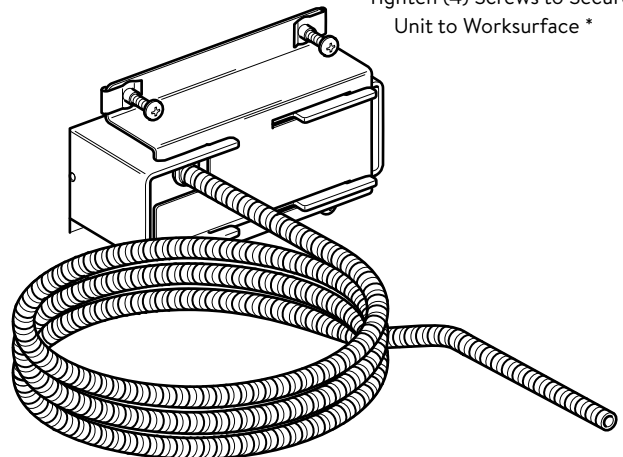

### WIRE IDENTIFICATION

- LINE (BLACK)
- GROUND (GREEN)
- NEUTRAL (WHITE)

**STUDIO**

BY DEKKO

2505 Dekko Drive  
Garrett, IN 46738  
Customer Service: 800.357.5622

**ASHLEY DUO BEZEL**  
- Conduit Feed -  
Horizontal & Vertical Surface Mounting  
Installation Instruction Template

This device complies with part 15A of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

