


VILLA II 42 INSTALLATION

Components & Hardware



A) Villa II, Qty. 1



B) #8 x .75", Qty. 10



C) P-Clamp, Qty. 4




D) Stuffer Cap, (on select models)

Tools Needed




Note: *Take care not to pierce finished surfaces.

- 1- Locate and cut the hole for the Villa II. Prepare pilot holes as needed.*

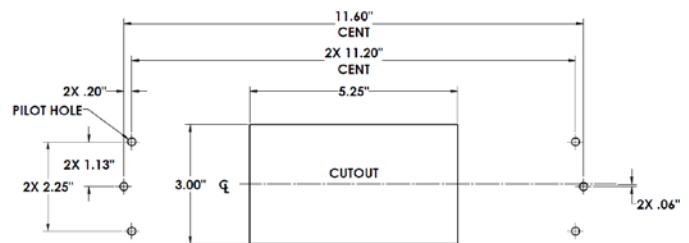

- 2- Mount Villa II (A) beneath the cutout. Secure with screws (B)* and position as needed. Do not use provided screws on table thicknesses less than 1.00".

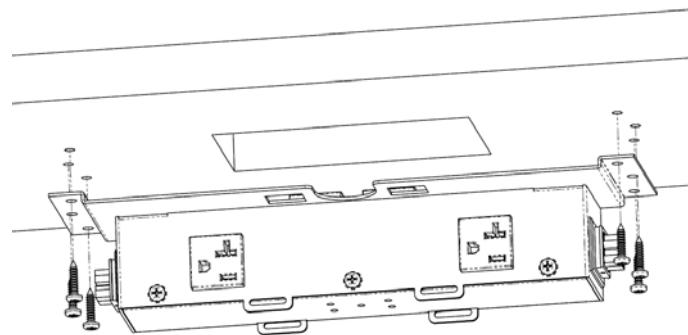

- 3- Connect power cables as shown. Connect all data cabling, if provided, as needed.

