


VILLA LG CORDED INSTALLATION

Components & Hardware



(B) Mounting Screw
#8 x.75", Qty 10



(C) P-Clamp
Qty 4


Tools Needed




For use with: Do not use provided screws on table thicknesses less than 1.00"

Note: *Use caution not to pierce top surface with screws.

1- Provide 8.00" x 4.00" cutout at location Villa LG will be mounted. Corners can have a maximum of a .25" radius.

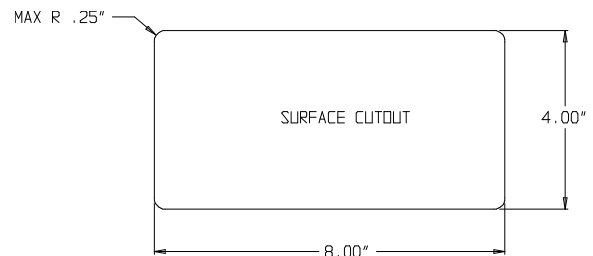

2- Attach Villa LG (A) to surface from underside using screws (B) provided as shown. Be sure to center receptacles in opening.

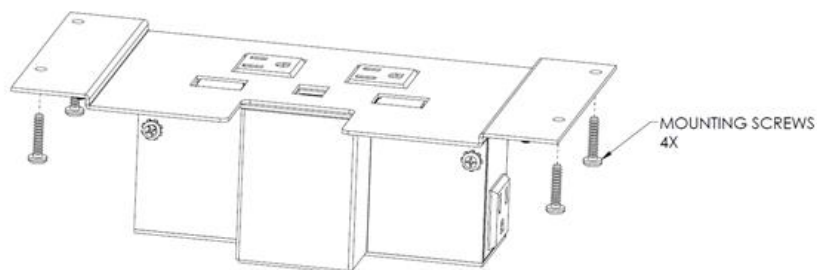

3- Connect all power and data cabling as needed.

4- Use P-Clamps (C) and remaining screws (B) to route cord and attach to underside of work surface as needed.

Plug into an appropriate outlet that is properly installed and grounded in accordance with all local codes and regulations.