




# VILLA LG CORDED INSTALLATION

## Components & Hardware




## Tools Needed




**For use with:** Do not use provided screws on table thicknesses less than 1.00"

**Note:** \*Use caution not to pierce top surface with screws.

**1-** Provide 8.00" x 4.00" cutout at location Villa LG will be mounted. Corners can have a maximum of a .25" radius.

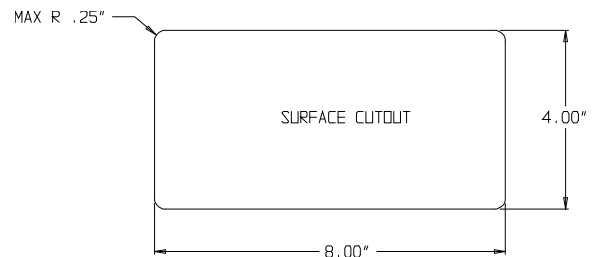

**2-** Attach Villa LG (A) to surface from underside using screws (B) provided as shown. Be sure to center receptacles in opening.

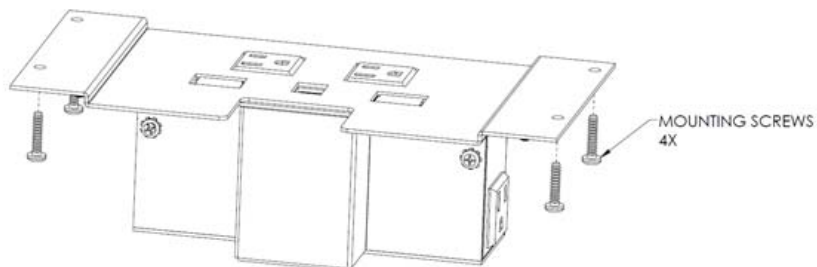

**3-** Connect all power and data cabling as needed.

**4-** Use P-Clamps (C) and remaining screws (B) to route cord and attach to underside of work surface as needed.