


VILLA LG DAISYLINK INSTALLATION

Components & Hardware




Tools Needed

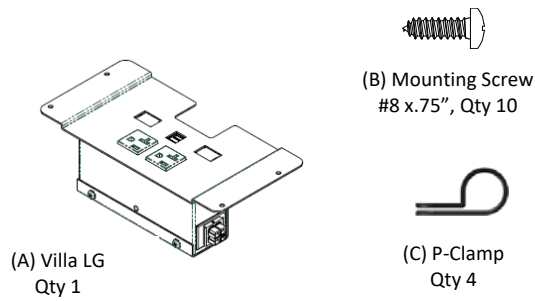


For use with: Do not use provided screws on table thicknesses less than 1.00"

Note: *Use caution not to pierce top surface with screws.

1- Provide 8.00" x 4.00" cutout at location Villa LG will be mounted. Corners can have a maximum of a .25" radius.

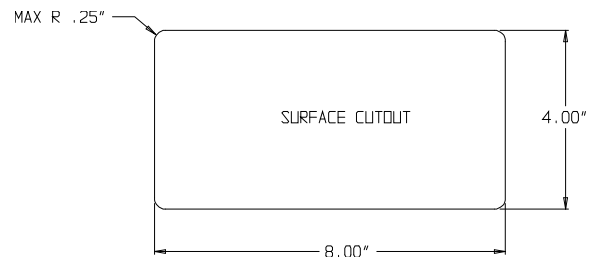

2- Attach Villa LG (A) to surface from underside using screws (B) provided as shown. Be sure to center receptacles in opening.

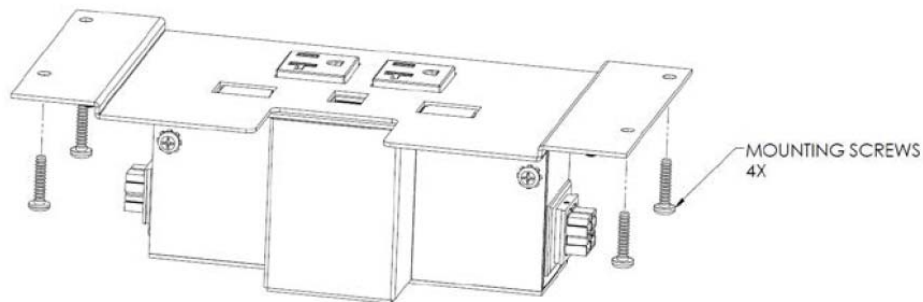

3- Connect all power and data cabling as needed.

4- Use P-Clamps (C) and remaining screws (B) to route cord and attach to underside of work surface as needed.