



## DESCRIPTION


The L200 low-profile luminaire features your choice of three optic systems including lens, drop baffle, and flush baffle. Configured for either individual or continuous runs, the versatile L200 LED series is designed with clean, straight lines making it a great choice for your lighting projects in open and private offices, educational facilities, retail, or other applications.

## SPECIFICATIONS


|                   |  |
|-------------------|--|
| Housing:          | 20 gauge cold-rolled steel construction                        |
| Lengths:          | 4' and 8' fixtures that can also be joined for continuous rows |
| Finish:           | Durable, low gloss, textured powder coated finish              |
| End Caps:         | Flat end cap provides a clean finish                           |
| Approvals:        | DLC and UL/CUL   |
| LED Engine:       | Dimming driver and LED board combination                       |
| Optional Drivers: | Lutron, Osram, EldoLED and other options available             |
| Distribution:     | Standard 80/20 with optional distributions available           |
| Optic:            | Available in lens, flush baffle, or drop baffle                |
| Output Package:   | Super saver, high output, and very high lumen levels available |
| Sensor:           | Optional integrated daylight or occupancy sensors              |
| LED Color:        | Available color temperatures of 3000k, 3500k, and 4000k        |
| Mounting:         | Aircraft grade cable with fully adjustable yoke mount          |
| Ceiling Type:     | T-bar or hard ceiling mounting kits available                  |
| Battery:          | Optional 12 watt constant power emergency battery              |
| CRI:              | 82+  |
| I.E.S. Data:      | Available upon request   |
| Warranty:         | 5-Year limited warranty  |

## PHOTOMETRICS


\* Measurements based on High level output




80/20 - Standard  
5194 lumens  
81% up - 19% down  
116 lm/W




60/40 - Option  
4779 lumens  
63% up - 37% down  
106 lm/W




50/50 - Option  
4530 lumens  
48% up - 52% down  
101 lm/W



30/70 - Option  
4497 lumens  
34% up - 66% down  
101 lm/W



20/80 - Option  
4407 lumens  
25% up - 75% down  
99 lm/W



0/100 - Option  
3462 lumens  
0% up - 100% down  
77 lm/W




\*DesignLights Consortium (DLC) qualifications are limited to specific models

## FIXTURE OPTIONS

Ordering Example: L250-4-30-120-HO-WHT

| FIXTURE SERIES    | LENGTH | LED COLOR | VOLTAGE      | OUTPUT               | DISTRIBUTION TYPE   | EMERGENCY CIRCUIT  | FINISH                              | INTEGRATED SENSOR          | OPTIONS              |
|-------------------|--------|-----------|--------------|----------------------|---------------------|--|-------------------------------------|----------------------------|----------------------|
| L250 Lens         | 4      | 30 3000k  | MVO 120-277v | SS Super Saver       | Blank Standard      | Blank None   | WHT                                 | Blank None                 | Blank None           |
| L245 Flush Baffle | 8      | 35 3500k  | 120 120v     | HO High Output       | 64 60% up, 40% down | EF Separate individual emergency feed                        | * Consult factory for custom colors | DAY Daylight               | FF Fast blow fuse    |
| L240 Drop Baffle  | 40     | 4000k     | 277 277v     | VHO Very High Output | 55 50% up, 50% down | EHF Emergency through wiring with separate feed              |                                     | DOC Daylight and Occupancy | FS Slow blow fuse    |
|                   |        | 5000k     | 347 347v     |                      | 37 30% up, 70% down | EHS Emergency through wiring single feed with shared neutral |                                     | EB Emergency battery       | EC Emergency circuit |
|                   |        |           |              |                      | 28 20% up, 80% down |  |                                     |                            |                      |
|                   |        |           |              |                      | 01 0% up, 100% down |  |                                     |                            |                      |


\* END CAP KIT: 200-WHT (One kit required per fixture run)

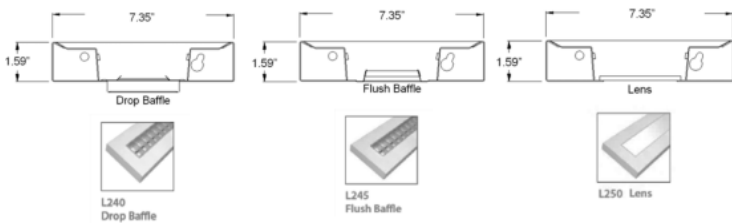

| 4' Output Package | Lumens | Watts | Lumens/Watt |
|-------------------|--------|-------|-------------|
| Super Saver (SS)  | 3498   | 25    | 140         |
| High (HO)         | 4515   | 34    | 133         |
| Very High (VHO)   | 5462   | 42    | 130         |

\* Based on L250 at 4000k CCT

## MOUNTING SUPPORT LENGTHS & FIXTURE WEIGHTS

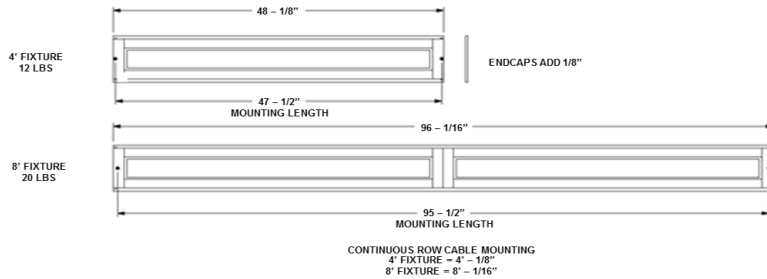

## HARDWARE ORDERING EXAMPLE: SFD-Y-15C-FA-36

| PREFIX                           | FIXTURE ATTACHMENT               | CEILING TYPE        | SUSPENSION         | SUSPENSION LENGTH         |
|----------------------------------|----------------------------------|---------------------|--------------------|---------------------------|
| SFD Single circuit feed dimmable | Y Two point                      | HC Hard ceiling     | FA Fully assembled | 18 24" adjustable cable   |
| ECF Emergency circuit feed       | S Stem mount                     | SC Screw set clip   |                    | 24 30" adjustable cable   |
| NP Non-power feed                | (consult factory for variations) | 15C 15/16" tee clip |                    | 36 42" adjustable cable   |
|                                  |                                  | 9C 9/16" tee clip   |                    | 72 78" adjustable cable   |
|                                  |                                  |                     |                    | 144 150" adjustable cable |

## KIT CONTENTS

- Support clips for T-bar, OR straps for J-box, with threaded stud for cable connection
- One white canopy
- Aircraft cable
- Feed cord (except non-feed hangers)
- Fixture attachment hardware

## MOUNTING TYPES

