


SECLUSION BRACKET INSTALLATION

Components & Hardware



Tools Needed

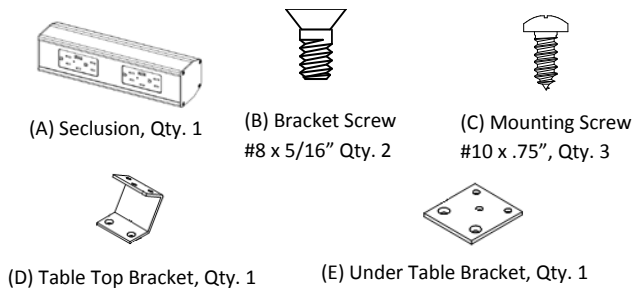



For use with: Do not use provided screws on table thicknesses less than 1.00".

Note: *Use caution not to pierce top surface with screws.

Installation Instructions:

- 1-** Determine if Seclusion (A) is to be mounted on top or under table.
- 2-** Attach either Table Top Bracket (D) or Under Table Bracket (E) to Seclusion using Bracket Screws (B), provided. Note: for under table mounting, the Seclusion must be a minimum of 1" back from the table's edge.
- 3-** Determine location for Seclusion and attach to table, as shown, using Mounting Screws (C), provided*.
- 4-** Make data connections if required (use caution when snapping RJ's into faceplate to prevent them from falling into Seclusion).
- 5-** Connect all power and data cabling as needed.

Table Top Mount

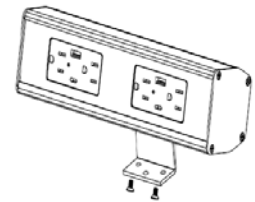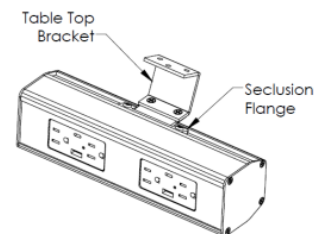

Under Table Mounting

