

ELECTROLITE™ IN-SURFACE



BEST-IN-CLASS IN-SURFACE

HIGH DESIGN. LATEST TECH.

Introducing Electrolite™ In-surface — Designed to give you the robust construction you need with an in-surface product, with all of the configurability and intentional design you have come to expect from the Electrolite series. From top to bottom, the attention to detail is clear and paired with the latest tech to keep you connected.

On top of being an intentionally designed solution for flexible workspaces, the Electrolite™ series of products are our most configurable power products yet. Users can choose from the number and orientation of Tamper Resistant receptacles, the incorporation of a combination USB-A/60-watt USB-C Power Delivery charging port, cord strain relief, and a combination of 5 colors that fit nearly any environment.

In short—Electrolite $^{\text{TM}}$ can be made to conform to any space or need.





ADVANCED CHARGING TECHNOLOGY

Electrolite™ In-Surface offers users the best in power by incorporating GaN technology, which allows the output performance to increase, even as the size of the power unit decreases. This type of technology reduces heat output, keeping all of your devices protected from overheating, and provides the option of a 60-watt USB-C Power Delivery port and a reversible USB-A port—giving you 72 watts of total power so you'll never have a product you can't charge

PRODUCT CONFIGURABILITY

In the past, power products lacked creativity and adaptability to their surroundings. But, that all changes with the Electrolite™ series. ECA by Dekko saw a distinct need to create a configurable solution for today's dynamic workspaces. Choose the number of Tamper Resistant receptacles, the orientation of the receptacles, the incorporation of a reversible USB-A port and a 60-watt USB-C Power Delivery port, the layout of the receptacles and charging ports, a variety of color combinations, and even the posterior strain relief of the cord exiting the product.

HIGH-END SAFETY FEATURES

Tamper Resistant receptacles reduce the risk of electrical shock and are ideal for use in public spaces or in areas throughout the home. Electrolite™ In-Surface is ETL Listed.

FEATURES:

Mounting Capabilities

In-Surface

Applications

Ancillary Furniture

Work Surfaces

Soft-Sided Seating

Training Tables

Standard Finishes

Silver


Black (Textured & Smooth Finishes)

White

Bronze

Latte

Carbon

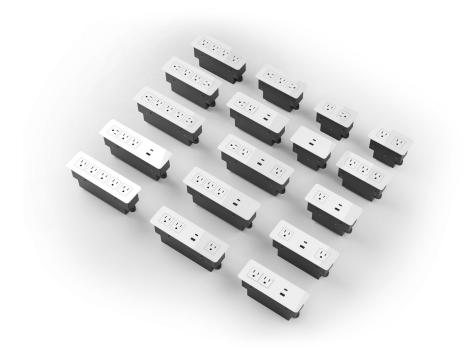

PRODUCT SPECIFICATIONS:


- (1-5) 15A, 120V Tamper Resistant AC Receptacles
 - Optional Rotated AC Receptacle Configurations Available
- USB/USB-C® Ports are Independently Controlled with 72 watts of Total Charging Power
 - (1) 2.4A, 12-watt Reversible USB-A Port
 - (1) 60-watt USB-C Power Delivery Port
- Standard Cord Length of 108"
- Straight and 90° Cord Strain Relief Options Available
- Advanced GaN Technology
- FCC Tested
- ETL Listed



^{*}Interested in a customized color? Contact us for details.


PRODUCT DIMENSIONS

- 2 Power or USB Only Product Dimensions: 4.71" x 2.55" x 3.65"
- 3 Power or 1 Power with USB Product Dimensions: 5.96" x 2.55" x 3.65"
- 4 Power or 2 Power with USB Product Dimensions: 7.31" x 2.55" x 3.65"
- 5 Power or 3 Power with USB Product Dimensions: 8.81" x 2.55" x 3.65"

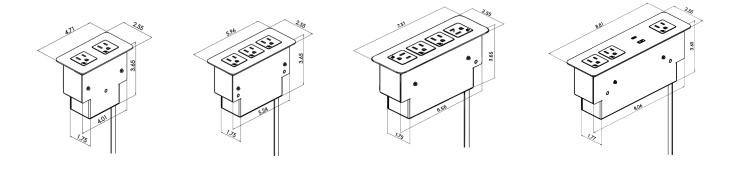

HOLE CUTOUT DIMENSIONS


- 2 Power or USB Only Cutout Dimensions: 2.00" x 4.25"
- 3 Power or 1 Power with USB Cutout Dimensions: 2.00" x 5.50"
- 4 Power or 2 Power with USB Cutout Dimensions: 2.00" x 6.75"
- 5 Power or 3 Power with USB Cutout Dimensions: 2.00" x 8.38"





Choose Your Power Setup

 Tamper Resistant AC Configurations: Choose one, two, three, four, or five Tamper Resistant 15 amp AC Receptacles—and their orientation. Add in a combination USB-A/USB-C® port to create the model that works best for you

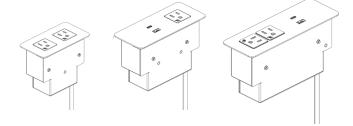

Choose Your Color

New Refreshed Color Palette: a modern color palette for a modern power solution. Our updated colors include our classic Black, Silver, and White, with the addition of Bronze, Latte, and Carbon. To continue delivering an ever-evolving product design experience, all Electrolite™ In-Surface models are made available in a contemporary finish



• Color Variations: choose between a monochromatic scheme, a painted body, or a painted face color variation



Monochromatic

The faceplate and receptacles are all color matched to the chosen color swatch




Two-Tone

The faceplate and receptacles are color matched to two different chosen color swatch's




POWER ONLY




2 Power ES2-XX-108R




3 Power ES3-XX-108R




4 Power ES4-XX-108R




5 Power ES5-XX-108R




2 Power, Rotated ES2R-XX-108R



3 Power, Rotated ES3R-XX-108R



4 Power, Rotated ES4R-XX-108R



5 Power, Rotated ES5R-XX-108R




POWER & USB




1 USB-A, 1 USB-C® ESAC-XX-108R




1 AC, 1 USB-A, 1 USB-C[®] ES1AC-XX-108R




1 AC, 1 USB-A, 1 USB-C®, 1 AC ES1AC1-XX-108R




2 AC, 1 USB-A, 1 USB-C® ES2AC-XX-108R




2 AC Rotated, 1 USB-A, 1 USB-C® ES2ACR-XX-108R




2 AC, 1 USB-A, 1 USB-C[®], 1 AC ES2AC1-XX-108R



3 AC Rotated, 1 USB-A, 1 USB-C[®] ES3ACR-XX-108R



3 AC, 1 USB-A, 1 USB-C® ES3AC-XX-108R



2 AC Rotated, 1 USB-A, 1 USB-C®, 1 AC ES2AC1R-XX-108R



POWER ONLY

DESCRIPTION PART NUMBER

TWO POWER

• 2 Tamper Resistant Receptacles ES2-XX-108R

2 Tamper Resistant Receptacles (1 Receptacle Rotated 90°)
 ES2R-XX-108R

THREE POWER

• 3 Tamper Resistant Receptacles ES3-XX-108R

• 3 Tamper Resistant Receptacles (2 Outer Receptacles Rotated 90°) ES3R-XX-108R

FOUR POWER

• 4 Tamper Resistant Receptacles ES4-XX-108R

• 4 Tamper Resistant Receptacles (2 Outer Receptacles Rotated 90°) ES4R-XX-108R

FIVE POWER

• 5 Tamper Resistant Receptacles ES5-XX-108R

• 5 Tamper Resistant Receptacles (2 Outer Receptacles Rotated 90°) ES5R-XX-108R

S = Mounting Option	XX = Color Option	Cord Length	Y=Strain Relief
	B = Black (Textured)	108" = Standard Length	R = 90° Strain Relief
	S = Silver		
	W = White		
ES = In-Surface	Z = Bronze		
(Clamp bracket with hand knobs)	L = Latte		
	C = Carbon		



POWER & USB

DESCRIPTION PART NUMBER

USB ONLY

ONE POWER WITH USB

.	• 1Tamper Resistant Receptacle, 1 USB-A, 1 USB-C®	ES1AC-XX-108R

TWO POWER WITH USB

• 2 Tamper Resistant Receptacles (1 on each end), 1 USB-A, 1 USB-C® (Centered)	ES1AC1-XX-108R
• 2 Tamper Resistant Receptacles, 1 USB-A, 1 USB-C®	ES2AC-XX-108R
• 2 Tamper Resistant Receptacles, (1 Farthest Left Rotated 90°), 1 USB-A, 1 USB-C®	ES2ACR-XX-108R

THREE POWER WITH USB

• 3 Tamper Resistant Receptacles (2 on Left Side, 1 on Right Side), 1 USB-A, 1 USB-C® (Centered)	ES2AC1-XX-108R
• 3 Tamper Resistant Receptacles (2 on Left Side, 1 on Right Side. Receptacle Farthest Left Rotated 90°) 1 USB-A, 1 USB-C® (Centered)	ES2AC1R-XX-108R
• 3 Tamper Resistant Receptacles, 1 USB-A, 1 USB-C®	ES3AC-XX-108R
 3 Tamper Resistant Receptacles (1 Farthest Left Rotated 90°) 1 USB-A, 1 USB-C® 	ES3ACR-XX-108R

S = Mounting Option	XX = Color Option	Cord Length	Y=Strain Relief
ES = In-Surface (Clamp bracket with hand knobs)	B = Black (Textured) S = Silver W = White Z = Bronze L = Latte C = Carbon	108" = Standard Length	R = 90° Strain Relief

