

COVE™ RJ/RJ2 & LG - CORDED & DAISYLINK

FEATURES:

Applications

Bezel / In-Surface

Standard Finishes

- Silver Pearl
- Black
- Gloss White
- Brushed Aluminum




Specifications

- 2 - 15A, 120V AC Power Receptacles
- 2 - 2.1A/10.5W USB Charging Ports
- 1-2 Data Knockouts (*Available On Select Models*)
- Corded & DaisyLink Options
- Standard Cord Lengths: 108" with 90-Degree Plug
- Compatible with 4 Wire 2 Circuit DaisyLink System - Starter & Interconnecting Cable Options
- Circuit 1 & 2 Options Available
- Recommended Table Thickness for Cove® LG/RJ: 0.25" - 1.50"
- Cove® RJ Recommended Table Cut Out: 2" x 6.75"
- Cove® LG Recommended Table Cut Out: 2.5" x 6"
- Optional Mounting Accessory: 1.50" Mounting Bracket for Surface Thicknesses up-to 1.50"
- ETL Listed for US and Canada

Dimensions

- Cove RJ/RJ2 Standard Dimensions: 2.5" x 7.25" x 3.18"
- Cove® LG Standard Dimensions: 3" x 6.5" x 3.18"

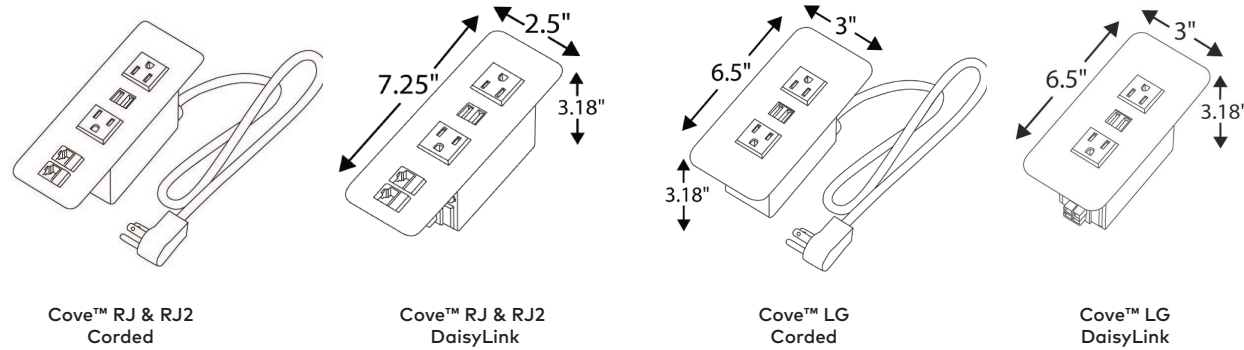

Cove™ RJ & RJ2 Corded

Cove™ RJ & RJ2 DaisyLink

Cove™ LG Corded

Cove™ LG DaisyLink

DESCRIPTION

FINISH

PART NUMBER

Cove™ RJ - Corded

- 2 Power, (2) 2.1 AMP USB, 1 RJ Data Knockout, 108" Cord

Silver Pearl
Black
Gloss White
Brushed Aluminum

COV-RJ-2U-S-108
COV-RJ-2U-B-108
COV-RJ-2UGW108
COV-RJ-2UAL108

Cove™ RJ2 - Corded

- 2 Power, (2) 2.1 AMP USB, 2 RJ Data Knockout, 108" Cord

Silver Pearl
Black
Gloss White
Brushed Aluminum

COV-RJ2-2U-S108
COV-RJ2-2U-B108
COV-RJ2-2UGW108
COV-RJ2-2UAL108

Cove™ LG - Corded

- 2 Power, (2) 2.1 AMP USB, 108" Power Cord

Gloss White
Silver Pearl
Black
Brushed Aluminum

COV-LG-2U-GW108
COV-LG-2U-S-108
COV-LG-2U-B-108
COV-LG-2U-AL108

Cove™ RJ - DaisyLink

- 2 Power, 2 2.1 AMP USB, 1 RJ Data Knockout, DaisyLink

Silver Pearl
Black
Gloss White
Brushed Aluminum

COV-RJ-2U-4-1-S
COV-RJ-2U-4-1-B
COV-RJ-2U-41-GW
COV-RJ-2U-41-AL

Cove™ RJ2 - DaisyLink

- 2 Power, 2 2.1 AMP USB, 2 RJ Data Knockout, DaisyLink

Silver Pearl
Black
Gloss White
Brushed Aluminum

COV-RJ2-2U-4-1-S
COV-RJ2-2U-4-1-B
COV-RJ2-2U-41-GW
COV-RJ2-2U-41-AL

Cove™ LG - DaisyLink

- 2 Power, (2) 2.1 AMP USB, DaisyLink

Gloss White
Silver Pearl
Black
Brushed Aluminum

COV-LG-2U-4-1-GW
COV-LG-2U-4-1-S
COV-LG-2U-4-1-B
COV-LG-2U-4-1-AL

Data Knockout Options

- RJ45 cat 6 data jack
- HDMI F/F Keystone jack
- USB 2.0 Keystone Type A/A
- USB 2.0 Keystone Type A/A

N/A
Black
Black
White

RJ45-B
HDMI-KEY-B
USB-20AA-B-72K
USB-20AA-W-72K

DaisyLink Starter & Interconnecting Cable Options

- Female/Female Interconnecting Cable
- Female/Male Interconnecting Cable
- Hardwire Starter Cable
- T-Connector used to branch into different directions
- DaisyLink Nylon Black Cable Covers - Add "B" to cabling part number

12" -180" Cable
12" -180" Cable
12" -180" Cable
Black
Black

42-FF-Length*
42FM-Length*
42SB2-Length*
Daisy-T
Cable Covers "B"

Specify in increments of 1" Cable Lengths in Part Number. Cable Lengths Minimum of 12" - 180" Maximum.

Cove™ Bracket Accessory

- Optional Cove Mounting Bracket for Table Thicknesses up to "1.50"

Black

COV-1.5-BRKT

Cove Standard Cord Length is 108". Additional Cord Length options available at cost: 36", 72", 144" and 180". Replace "108" in the listed Part Number with Appropriate Cord Length: 36", 72", 144" or 180". Replace "1" in DaisyLink Part Number with "2" for Circuit 2 Option.