





OASIS™ - DAISYLINK

FEATURES:

Applications

- Bezel /In-surface
- Table-trough
- Conferencing/Meeting Applications

Standard Finishes

- Silver Pearl 
- Black 
- Brushed Aluminum 
- Black Brushed Aluminum 




Specifications


- 8 -12 - 15A, 120VAC Power Receptacles
- 4 - 2.1A/10.5W USB Charging Ports (Available on USB Versions Only)
- 2 - 6 Telecom Plate Knockouts - Fully Customizable (Quantity Vary by Configuration; Purchased Separately)
- Compatible with DaisyLink 4 Wire 2 Circuit System - Starter & Interconnecting Cables (Purchased Separately)
- Starter & Interconnecting Cable Lengths: Minimum 12" - 180" (Specify in 1" Increments)
- Circuit 1 & 2 Options Available
- Optional Outer Pan Accessory (Purchased Separately)
- 30" Table-Trough
- Recommended Table Thickness: 0.88" - 2"
- Recommended Table Cutout: 29.12" x 8.25" - See Install Sheet for Additional Undercuts Required
- Power Inserts UL Listed for US and Canada

Dimensions


- Oasis™ Standard Dimensions: 9" x 30"
- Oasis™ Outer Pan Dimensions: 11.20" x 30" x 5.29"
- Oasis™ Inserts: 11.25" x 2.67"

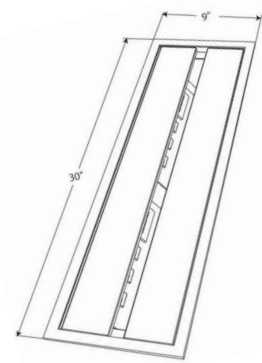

Oasis Closed Retractable Lid Shown

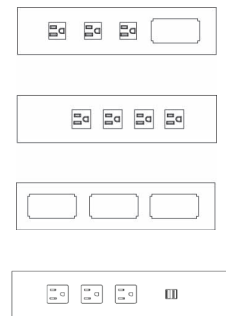

Power, Data & USB Inserts Shown

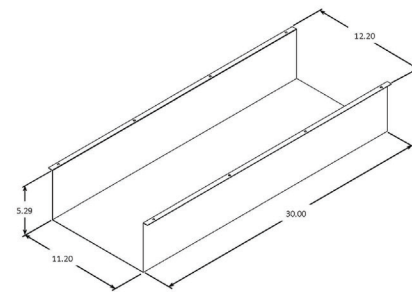

Outer Pan Accessory

DESCRIPTION

Oasis™ - DaisyLink

- Oasis A, 30" Trough with 8 Power Receptacles and 6 Telecom Plate Knockouts DaisyLink
- Oasis B, 30" Trough with 12 Power Receptacles and 4 Telecom Plate Knockouts DaisyLink
- Oasis USB, 30" Trough with 12 Power Receptacles, 4 USB Charging Ports, and 2 Telecom Plate Knockouts DaisyLink

FINISH

PART NUMBER

Brushed Aluminum	OAS-A-4-1-S
Black Brushed Aluminum	OAS-A-4-1-B
Silver Pearl	OAS-A-PC-4-1-S
Black	OAS-A-PC-4-1-B
Brushed Aluminum	OAS-B-4-1-S
Black Brushed Aluminum	OAS-B-4-1-B
Silver Pearl	OAS-B-PC-4-1-S
Black	OAS-B-PC-4-1-B
Brushes Aluminum	OAS-U-4-1-AL
Black Brushed Aluminum	OAS-U-4-1-BA
Silver Pearl	OAS-U-PC-4-1-S
Black	OAS-U-PC-4-1-B

Replace "1" in Part Number with "2" for Circuit 2 Options. See Starter and Interconnecting Cable Options Below.

DaisyLink Starter & Interconnecting Cable Options

Female/Female Interconnecting Cable	12" -180" Cable	42-FF-Length*
Female/Male Interconnecting Cable	12"-180" Cable	42FM-Length*
Hardwire Starter Cable	12"-180" Cable	42SB2-Length*
T-Connector used to branch into different directions	Black	Daisy-T
DaisyLink Nylon Black Cable Covers - Add "B" to cabling part number	Black	Cable Covers "B"

Specify in increments of 1" Cable Lengths in Part Number. Cable Lengths Minimum of 12" - 180" Maximum.

Accessories - For Oasis & UT Versions

Oasis Outer Pan - for concealing underside of 30" Oasis Trough	Silver Pearl Black	OASIS PAN SLVR OASIS PAN
--	-----------------------	-----------------------------

Telecom Plates, Lids & Bezel sold separately.
"Build Your Own" Insert Configurations Available - Call for Customization