

**REEF™ - DAISYLINK**

**FEATURES:**

**Applications**

Bezel / In-Surface  
Conference Room

**Standard Finishes**

- Silver Pearl
- Black
- Gloss White
- Brushed Aluminum




**Specifications**

- 3 or 4 - 15A, 120V AC Power Receptacles
- 2.1A/10.5W USB Charging Ports
- 2 Data Knockouts
- 1 Telecom Plate Knockout - Fully Customizable (Purchased Separately)
- Compatible with 4 Wire 2 Circuit DaisyLink System - Starter and Interconnecting Cables (Purchased Separately)
- Starter & Interconnecting Cable Lengths: Minimum 12" - 180" (Specify in 1" Increments)
- Recommended Table Thickness: 1" - 2"
- Recommended Table Cutout: 5.38" x 15.25" (See Install Sheet for Additional Undercuts Required.)
- ETL Listed for US and Canada

**Dimensions**

- Reef Standard Dimensions: 16.10" x 6.25" x 4.89"

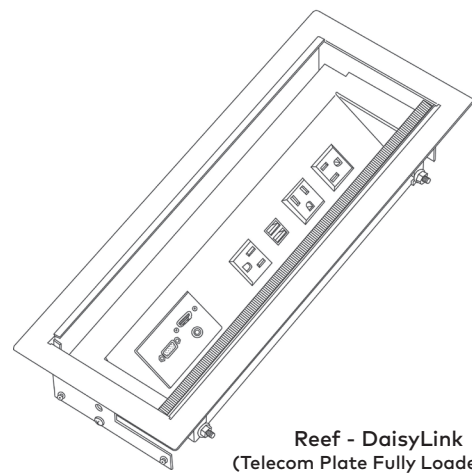

Reef - DaisyLink  
(Telecom Plate Fully Loaded For Visualization & Representation)

**DESCRIPTION**

**Reef™ - DaisyLink**

- 3 Power, 2 2.1 AMP USB, 1 Telecom Plate Knockout, 2 RJ45 Knockouts, DaisyLink
- 4 Power, 2 2.1 AMP USB, 1 Telecom Plate Knockout, 2 RJ45 Knockouts, DaisyLink

**FINISH**

Silver Pearl  
Black  
Gloss White  
Brushed Aluminum

Silver Pearl  
Black  
Gloss White  
Brushed Aluminum

**PART NUMBER**

REF-4-1-3U-S  
REF-4-1-3U-B  
REF-4-1-3U-GW  
REF-4-1-3U-AL

REF-4-1-4U-S  
REF-4-1-4U-B  
REF-4-1-4U-GW  
REF-4-1-4U-AL

Change "1" to a "2" to specify Circuit  
See DaisyLink Starter & Interconnecting Cable Options Below.

**DaisyLink Starter & Interconnecting Cable Options**

- Female/Female Interconnecting Cable
- Female/Male Interconnecting Cable
- Hardwire Starter Cable
- T-Connector used to branch into different directions
- DaisyLink Nylon Black Cable Covers - Add "B" to cabling part number

12" -180" Cable  
12"-180" Cable  
12"-180" Cable  
Black  
Black

42-FF-Length\*  
42FM-Length\*  
42SB2-Length\*  
Daisy-T  
Cable Covers "B"

Specify in increments of 1" Cable Lengths in Part Number.  
Cable Lengths Minimum of 12" - 180" Maximum.