

**TOP NOTCH 2 - CORDED**

**FEATURES:**

**Applications**

Bezel / In-Surface

**Standard Finishes**

- Silver Pearl
- Black
- Brushes Stainless Steel




**Specifications**

- 1-2 - 15A, 120V AC Power Receptacles
- Data Knockouts (*Available on Select Models*)
- Corded Options
- Power Only Standard Cord Length: 72"
- Power & Data Standard Cord Length(s): 72" Patch & Power Cord
- Recommended Table Thicknesses: .75" - 1.88"
- Recommended Table Cutout: 3.40" x 3.40"
- Lid Lifts Open for Power & Data Access - Lays Flush to Surface When Closed
- UL Listed for US and Canada

**Dimensions**

- Standard Top Notch 2 Dimensions: 3.70" x 3.70" x 1.30"

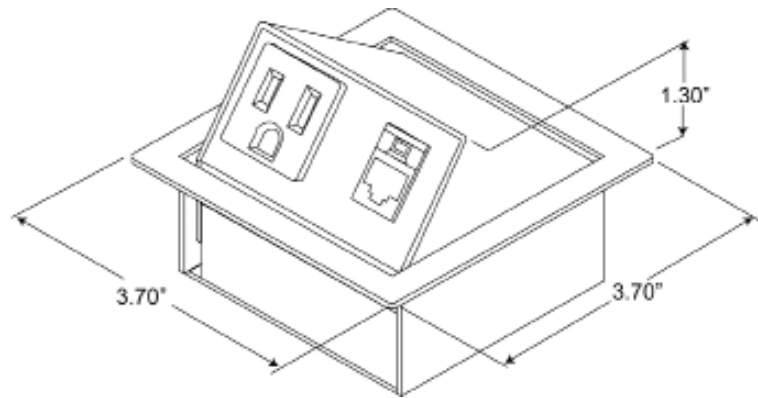

Top Notch 2  
1 Power 1 Data Jack Shown

**DESCRIPTION**

**FINISH**

**PART NUMBER**

**Top Notch 2 - 2 Power Only**

- Flip up unit, 2 power with 72" cord

Black  
Silver Pearl  
Brushed Stainless Steel

TOP NOTCH2 P BL  
TOP NOTCH2 P SP  
TOP NOTCH2 P SS

**Top Notch 2 - 1 Power & Data**

- Flip up unit, 1 power, 1 RJ -45 (cat 6) connector, 72" cord & 72" patch cord

Black  
Silver Pearl  
Brushed Stainless Steel

TOP NOTCH2 B BL  
TOP NOTCH2 B SP  
TOP NOTCH2 B SS

**Top Notch 2 - 1 Power & USB**

- Flip up unit, 1 power, 1 USB Universal connector, 72" cord & 72" patch cord

Black  
Silver Pearl  
Brushed Stainless Steel

TOP NOTCH2 U BL  
TOP NOTCH2 U SP  
TOP NOTCH2 U SS

**Accessories**

- Powered USB transformer to bring power from any standard outlet to the Top Notch 2 USB connector.

POWERED-USB