



VILLA UM INSTALLATION


Components & Hardware




A) Villa UM, Qty. 1
(VIL-UM-C-3 Shown)



B) #8 x .75", Qty.




C) P-Clamp, Qty. 4




D) Safety cover, Qty. 1

Tools Needed



Or




Note: Do not use provided screws on table thicknesses less than 1.00". *Take care not to pierce finished surfaces.


Note: For System 42 products only ECA System 42 connectors have been evaluated to prevent inadvertent contact with live parts. Connector openings are not required to be covered; however a cover is provided for use if desired, see detail below.

1- Determine the Villa UM's (A) mounting location and prepare the surface.

Models	"L"
VIL-UM-41-4, VIL-UM-C-4	10.15"
VIL-UM-C-3, VIL-UM-C-3U, VIL-UM-422U	7.75"
VIL-UM-41-2, VIL-UM-C-P	6.74"
VIL-UM-41-U	4.75"
VIL-UM-C-U	2.90"

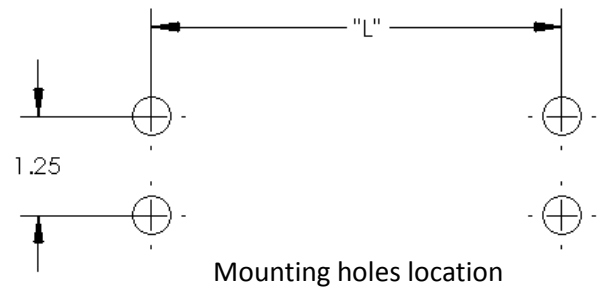

2- Attach to surface using screws provided (B)*.

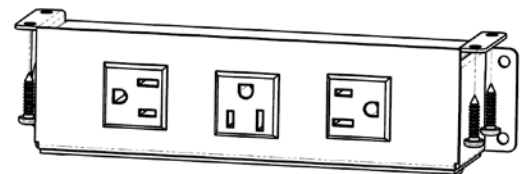

3- Connect all power and data cabling as needed. For system 42 models: line up similar colors contacts and snap together. Use only Electri-Cable Assemblies System 42 Cables.

4- Slide safety cover (D) onto open male cable mount if desired.

