

DEKKO


7310 Innovation Blvd. Suite 104
Fort Wayne, IN 46818
Customer Service: 800.357.5622

VILLA & VILLA II

Corded
Installation Instruction

This device complies with part 15A of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.




Tools Required



1 Cutout the Opening in the Worksurface

* NOTE *


Surface thickness 1in or greater with supplied hardware.
Be careful not to pierce finished surface.

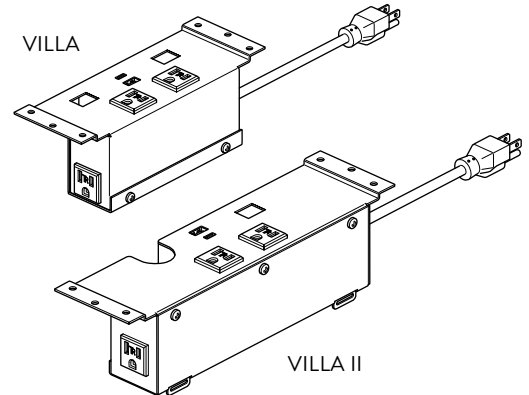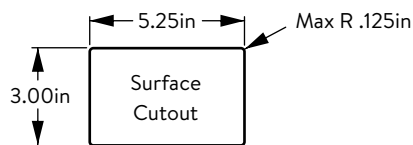


2 Install VILLA or VILLA II Assembly to the Underside of the Cutout Opening

* NOTE *

Center receptacles in cutout opening as shown below and mark mounting hole locations. Pre-drill holes prior to installing screws.

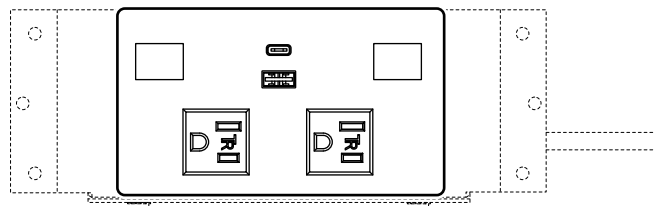

Cutout Opening
(5.25in X 3.00in)

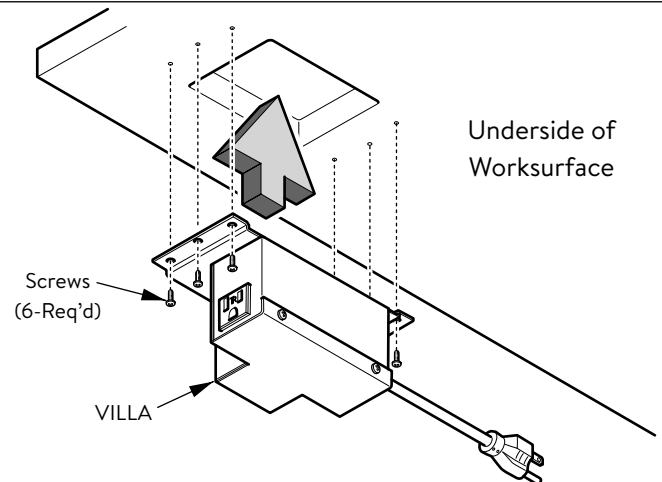

Underside of
Worksurface


Screws
(6-Req'd)

VILLA

3 Connect Power and Data Cabling as Needed and Use P-Clamps to manage Power Cord to Worksurface

* NOTE *

Plug power cord into an appropriate outlet that is properly installed and grounded in accordance with all local codes and regulations.

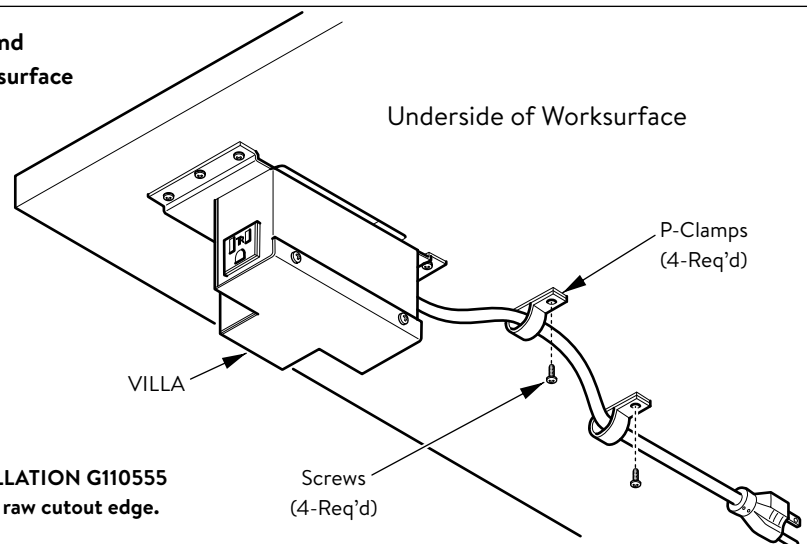

Underside of Worksurface

P-Clamps
(4-Req'd)

VILLA

Screws
(4-Req'd)

* NOTE *

To complete installation please refer to GROMMET INSTALLATION G110555 for installation instructions of the grommet to dress up the raw cutout edge.