

DEKKO


7310 Innovation Blvd. Suite 104
Fort Wayne, IN 46818
Customer Service: 800.357.5622

INTERACT G2

Corded
Installation Instruction

This device complies with part 15A of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



Tools Required




1 Determine INTERACT G2 mounting location and cutout the opening in the surface.

* NOTE *


This product fits surfaces .875in - 2in thick.

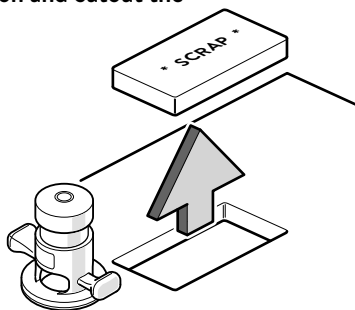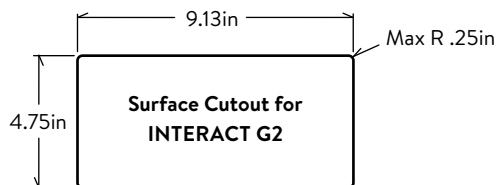

INTERACT G2

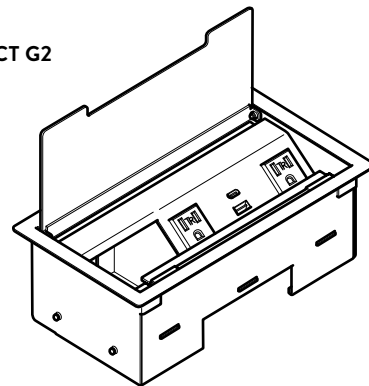


2 Install INTERACT G2 Assembly into the cutout opening.

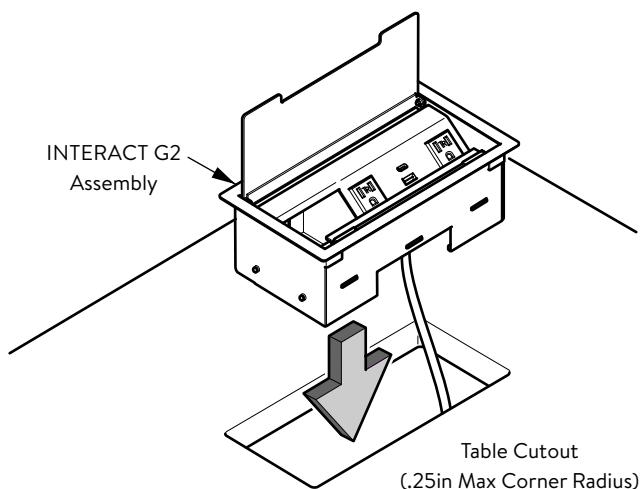

3 Install clamps onto INTERACT G2 and tighten thumbscrews to bottom side of surface.

* NOTE *

Key Slots in clamps engage over T-studs on INTERACT G2 assembly. For proper support a Clamp needs to be installed on both ends of the INTERACT G2 assembly.

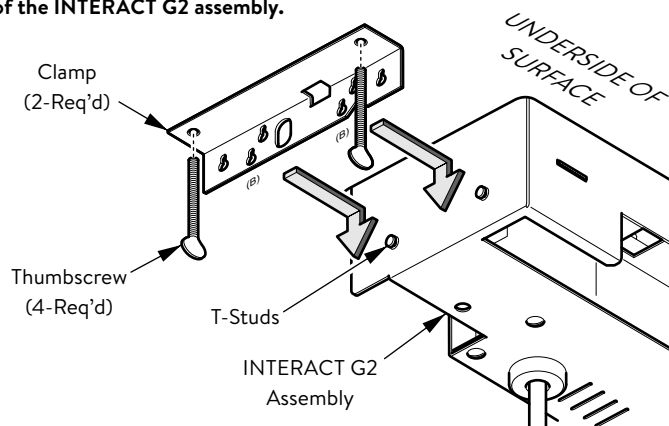

4 Connect power and data cabling as needed and use P-Clamps to manage Power Cord to surface.

* NOTE *

Plug power cord into an appropriate outlet that is properly installed and grounded in accordance with all local codes and regulations.

