

DEKKO


7310 Innovation Blvd. Suite 104
Fort Wayne, IN 46818
Customer Service: 800.357.5622

INTERACT IV G2

Corded
Installation Instruction

This device complies with part 15A of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



Tools Required




1 Determine INTERACT IV G2 mounting location and cutout the opening in the surface.

* NOTE *


This product fits surfaces .875in - 2in thick.

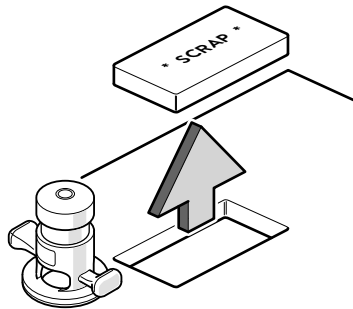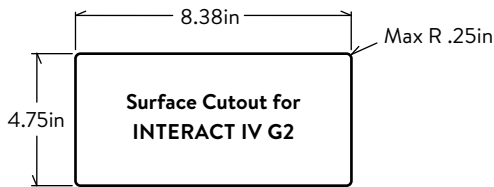

INTERACT IV G2

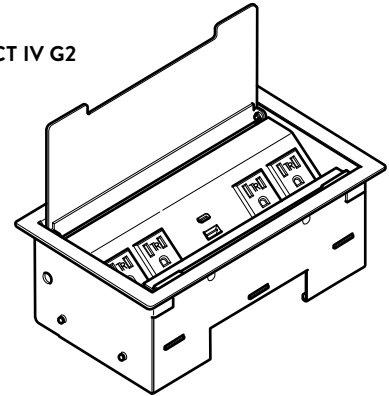


2 Install INTERACT IV G2 Assembly into the cutout opening.

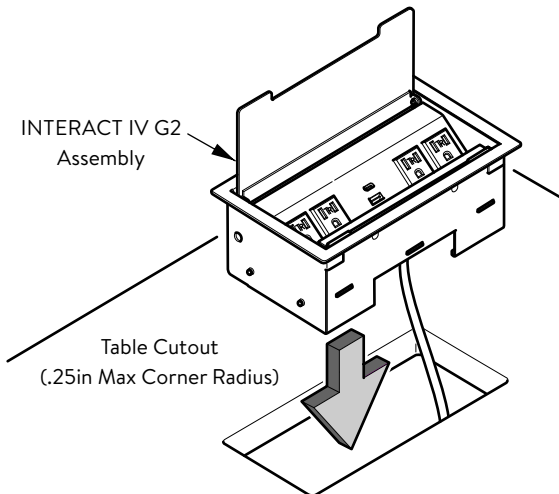

3 Install clamps onto INTERACT IV G2 and tighten thumbscrews to bottom side of surface.

* NOTE *

Key Slots in clamps engage over T-studs on INTERACT IV G2 assembly. For proper support a Clamp needs to be installed on both ends of the INTERACT IV G2 assembly.

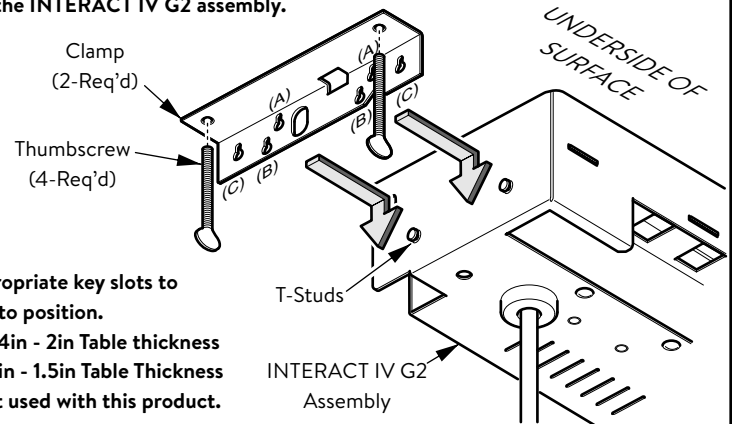

* NOTE *

Use appropriate key slots to clamp into position.
(A)'s 1 1/4in - 2in Table thickness
(B)'s 7/8in - 1.5in Table Thickness
(C)'s Not used with this product.

4 Connect power and data cabling as needed and use P-Clamps to manage Power Cord to surface.

* NOTE *

Plug power cord into an appropriate outlet that is properly installed and grounded in accordance with all local codes and regulations.

