


# POWER ISLAND INSTALLATION

## Components & Hardware



A) Power Island, Qty. 1



B) #10 x .75", Qty. 6




C) Plate Bracket, Qty. 1

## Tools Needed




**FOR USE WITH:** Approved for use with compatible 84DL mating components only. This is not compatible with Electri-Pak. \*Take care not to pierce finish surfaces with mounting hardware.


- 1-** Determine the Power Island's (A) mounting location. Attach to underside using the 6 screws (B) provided\*. Clip in optional data bracket (C) in place if required.

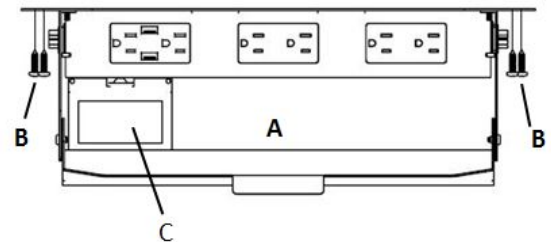

- 2-** Determine which side of the table the power-in feed (84DL SB2-XX) will be coming from. Connect the FM cable to that side of the Power Island. Align the cable support bracket to the end of the interconnecting cable (84DL FM-XX) so that the bracket keys into the conduit grooves and the retaining latches are accessible. Using 2 screws provided with clamp pack\* secure the bracket to the table. Repeat on the opposite side of the power module.

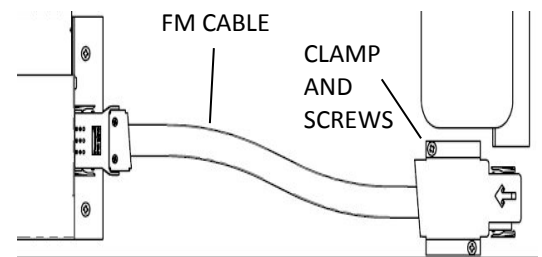

- 3-** Connect one end of the Loop cable (84DL LOOP-XX) to the end of the interconnecting cable installed in step 2. Repeat step 2 leaving out the FM & Loop Cable at the end of the run.

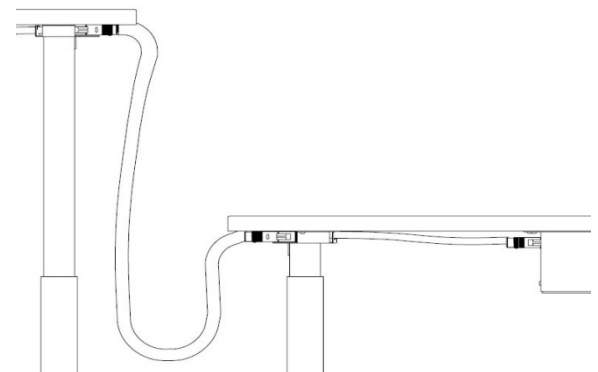

- 4-** Connect the power-in feed (84DL SB2-XX) to the building wiring per local code requirements. Connect the power-in feed (84DL SB2-XX) to the interconnecting cable held by the support bracket at the beginning of the run. Use P-clamps and screws provided with clamp pack\* to support connecting cables as needed.