



DESCRIPTION


The L400 low-profile luminaire is available in both lens and baffle body styles. Configured for either individual or continuous runs, the L400 LED series offers a full curve design on the underside making it an excellent choice for projects requiring high function and well-designed lighting. This series provides visual appeal made specifically for applications specifying high quality lighting with a high-end look.

SPECIFICATIONS


Housing:	20 gauge cold-rolled steel construction
Lengths:	4' and 8' fixtures that can also be joined for continuous rows
Finish:	Durable, low gloss, textured powder coated finish
End Caps:	Flat end cap provides a clean finish
Approvals:	UL/CUL
LED Engine:	Dimming driver and LED board combination
Optional Drivers:	Lutron, Osram, EldoLED and other options available
Distribution:	Standard 80/20 with optional distributions available
Optic:	Available in Lens or Flush Baffle
Output Package:	Super saver, high output, and very high output lumen levels available
Sensor:	Optional Integrated daylight or occupancy sensors
LED Color:	Available color temperatures of 3000k, 3500k, and 4000k
Mounting:	Aircraft grade cable with fully adjustable yoke mount
Ceiling Type:	T-bar or hard ceiling mounting kits available
Battery:	Optional 12 watt constant power emergency battery
CRI:	82+
I.E.S. Data:	Available upon request
Warranty:	5-Year limited warranty

PHOTOMETRICS


* Measurements based on High level output




80/20 - Standard
5387 lumens
84% up - 16% down
109 lm/W




60/40 - Option
4905 lumens
60% up - 40% down
101 lm/W



50/50 - Option
4480 lumens
51% up - 49% down
92 lm/W



30/70 - Option
4067 lumens
31% up - 69% down
84 lm/W



20/80 - Option
3696 lumens
18% up - 82% down
76 lm/W




FIXTURE OPTIONS

Ordering Example: L450-4-30-120-SS-WHT-FF

FIXTURE SERIES	LENGTH	LED COLOR	VOLTAGE	OUTPUT	DISTRIBUTION TYPE	EMERGENCY CIRCUIT	FINISH	INTEGRATED SENSOR	OPTIONS
L450 Lens	4	30 3000k	MVO 120-277v	SS Super Saver	Blank Standard	Blank None	WHT	Blank None	Blank None
L445 Flush Baffle	8	35 3500k	120 120v	HO High Output	64 60% up, 40% down	EF Separate individual emergency feed	* Consult factory for custom colors	DAY Daylight	FF Fast blow fuse
		40 4000k	277 277v	VHO Very High Output	55 50% up, 50% down	EHF Emergency through wiring with separate feed		OCC Occupancy	FS Slow blow fuse
		50 5000k	347 347v		37 30% up, 70% down	EHS Emergency through wiring single feed with shared neutral		DOC Daylight and Occupancy	EB Emergency battery
					28 20% up, 80% down				EC Emergency circuit
					01 0% up, 100% down				* Consult factory for Lutron, ELdoLED, Osram, or other drivers

* END CAP KIT: 400-WHT (One kit required per fixture run)

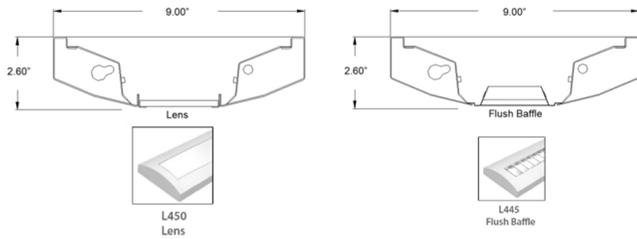


L450

4' Output Package	Lumens	Watts	Lumens/Watt
Super Saver (SS)	4947	41.5	119
High (HO)	5387	49	109
Very High (VHO)	7311	72.3	101

* Based on 4000k

MOUNTING SUPPORT LENGTHS & FIXTURE WEIGHTS

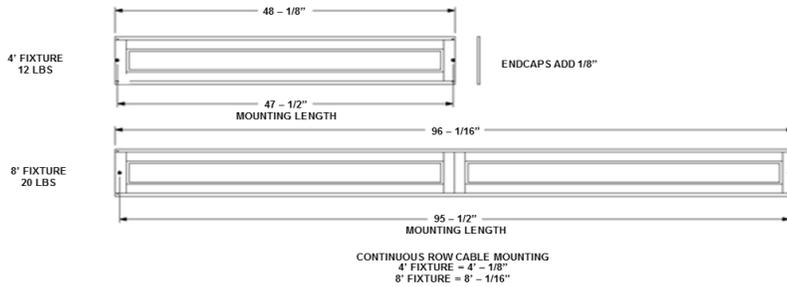

HARDWARE ORDERING EXAMPLE: SFD-Y-15C-FA-36

PREFIX	FIXTURE ATTACHMENT	CEILING TYPE	SUSPENSION	SUSPENSION LENGTH
SFD Single circuit feed dimmable	Y Two point	HC Hard ceiling	FA Fully assembled	18 24" adjustable cable
ECF Emergency circuit feed	S Stem mount	SC Screw set clip		24 30" adjustable cable
NP Non-power feed	(consult factory for variations)	15C 15/16" tee clip		36 42" adjustable cable
		9C 9/16" tee clip		72 78" adjustable cable
				144 150" adjustable cable

KIT CONTENTS

- Support clips for T-bar, OR straps for J-box, with threaded stud for cable connection
- One white canopy
- Aircraft cable
- Feed cord (except non-feed hangers)
- Fixture attachment hardware

MOUNTING TYPES

