


DESCRIPTION

The L600 Indirect/Direct linear pendant fixture provides a truly unique and sophisticated look for any project requiring an easy to install, upscale lighting system. The L600 Indirect/Direct linear pendant gives you the efficiency you've come to expect from LED's with a slim and sleek profile making it the perfect choice for high-end hotel lobbies, offices, universities, and retail spaces.

SPECIFICATIONS

Housing:	Extruded aluminum
Lengths:	2', 3', 4', 5', 6', 7', and 8' fixtures for individual or continuous row mounting
Finish:	Durable, low gloss, textured, polyester powder coating
Approvals:	UL/cUL Listed
Lumen Output:	Direct distribution: 350, 500, 750, 1000, 1250
Optics:	Snap in acrylic lens for soft, diffused direct lighting. Light sculpting film to produce batwing shaped indirect lighting
Dimming:	0-10V dimming to <1%
CRI:	82+ (90+CRI available. Consult factory)
Mounting:	Single point cable mount or stem mount
Battery:	Optional 12 watt constant power emergency battery
Maintenance:	Boards are projected to maintain 80% (L80) of their initial output for +80,000 hours
Warranty:	5-Year limited warranty

DIMENSIONS

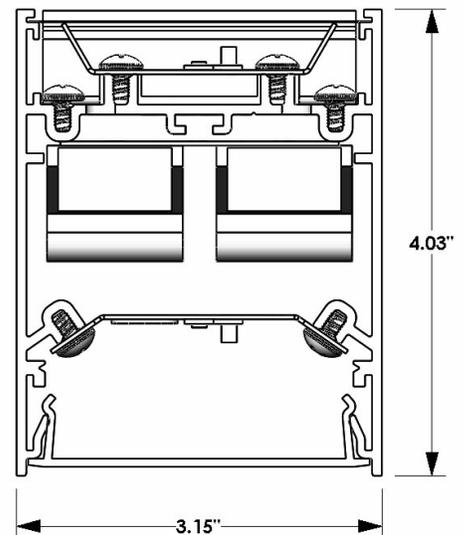

FIXTURE ORDERING

Ordering Example: L603ID-1000-4-35-8-2-UNV-S1-S-DAY-EC




FIXTURE SERIES	INDIRECT DISTRIBUTION		DIRECT DISTRIBUTION		LENGTH		COLOR TEMP		CRI
L603ID 3' Indirect/Direct Pendant	350	350 Lumens per foot	350	350 Lumens per foot	24	2ft	30	3000K	8 82+ CRI
	500	500 Lumens per foot	500	500 Lumens per foot	36	3ft	35	3500K	9 90+ CRI (Consult factory)
	750	750 Lumens per foot	750	750 Lumens per foot	48	4ft	40	4000K	
	1000	1000 Lumens per foot	1000	1000 Lumens per foot	60	5ft	50	5000K	
	1250	1250 Lumens per foot	1250	1250 Lumens per foot	72	6ft	WCT	White Color Tuning (2700K to 5000K)	
					84	7ft			
					96	8ft			

VOLTAGE		DRIVER		FINISH		CONTROLS		OPTIONS	
UE	120-277v	S1	1% Dimming (0-10v)	W	White	BLANK	None	BLANK	None
347	347v	Consult factory for additional options		S	Silver	DAY	Daylight	EB	Emergency Battery (12 Watt) *
				B	Black	OCC	Occupancy	EC	Emergency Circuit
				CC	Custom Color	DOC	Daylight/Occupancy	NL	Night Light Circuit
						CS	Customer supplied controls (consult factory)	IOTA (CP12). May not be available in all configurations	

May not be available in all configurations

Consult factory for optional controls

HARDWARE KIT ORDERING



Ordering Example: SFD-C-15C-36-EP24


FEED KIT		FIXTURE ATTACHMENT		CEILING TYPE		VOLTAGE		SUSPENSION		SUSPENSION LENGTH		FACTORY OPTIONS	
SFD	Single circuit feed dimmable	C	Single point cable	HC	Hard ceiling	UE	120-277	FA	Fully Adjustable	18	18" adjustable cable	BF	Black Power Feed
EF	Emergency circuit feed	S	Stem mount	SC	Screw set clip	347	347			36	36" adjustable cable	BC	Black Canopy
NP	Non-power feed			15C	15/16" tee clip					72	72" adjustable cable	SC	Silver Canopy
SIDP	Stem power feed			9C	9/16" tee clip					144	144" adjustable cable	Unless noted, power feed and canopy will be white.	
SIDNP	Stem non-power feed												

** KIT CONTENTS: Support clips for T-bar, OR straps for J-box, with threaded stud for cable connection, one white canopy, aircraft cable, feed cord (except non-feed hangers), fixture attachment hardware

END CAP KIT ORDERING

FIXTURE SERIES	END CAP TYPE		FINISH	
L600ID	EP	Cable mount end plate kit	W	White
	SEP	Stem mount end plate kit	S	Silver
			B	Black
			CC	Custom Color*


Color should match fixture




Ordering Example: L603ID-EP-S-10

*** One end cap kit required per fixture run. Please indicate number of end cap kits needed per order at the end of the ordering stream.

MOUNTING TYPES

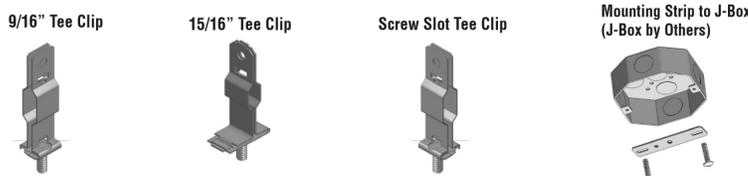

PHOTOMETRICS

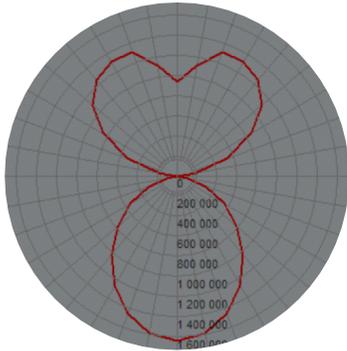

6000 lumens
131 lumens per Watt


- * Performance based on 4' luminaire at 4000K @ 25° C
- * 82+CRI
- * Calculated L80 at 80,000 hours
- * Lumens per foot are delivered lumens

LUMENS/WATT (Based on 4' unit)

Downlight	Up Light					System Watts
	350 lpf	500 lpf	750 lpf	1000 Lpf	1250 Lpf	
350 Lpf	24.7	28.1	36.1	41.2	51.6	
500 Lpf	27.2	33.2	40.3	46.0	56.2	
750 Lpf	39.9	41.9	50.5	55.2	65.7	
1000 Lpf	46.8	51.5	59.3	65.5	75.9	
1250 Lpf	57.8	62.4	70.3	76.4	86.9	


Downlight	Up Light					System Lms/Watt
	350 lpf	500 lpf	750 lpf	1000 Lpf	1250 Lpf	
350 Lpf	113.4	121.0	122.0	131.1	124.0	
500 Lpf	125.0	120.5	124.1	130.5	124.5	
750 Lpf	110.3	119.3	118.8	126.7	121.8	
1000 Lpf	115.3	116.5	118.1	122.2	118.6	
1250 Lpf	110.8	112.1	113.9	117.8	115.1	

MOUNTING SUPPORT LENGTHS & FIXTURE WEIGHTS

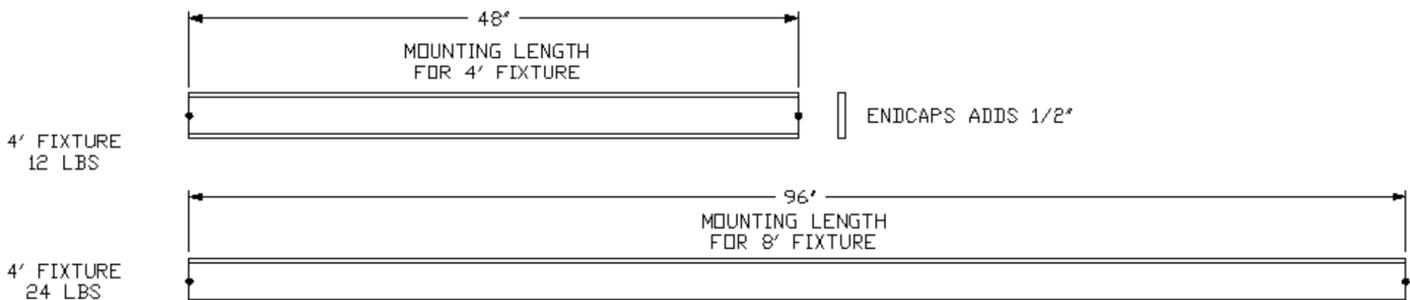


CORNERS

FIXTURE SERIES		CORNER TYPE		LED COLOR		VOLTAGE		OUTPUT		FINISH		FACTORY OPTIONS	
L603 Indirect/Direct Pendant	L603ID	Vertical In	VI	3000K	30K	120-277V	UNV	Super Saver	SS	White	W	None	BLANK
		Vertical Out	VO	3500K	35K	347V	347	High Output	HO	Silver	S	Fast Blow Fuse	EB
		Horizontal	H9	4000K	40K			Very High Output	VHO	Black	B	Slow Blow Fuse	EC
				5000K	50K			Extreme Output	EO	Custom Color ⁽⁴⁾	CC	Emergency Circuit	NL

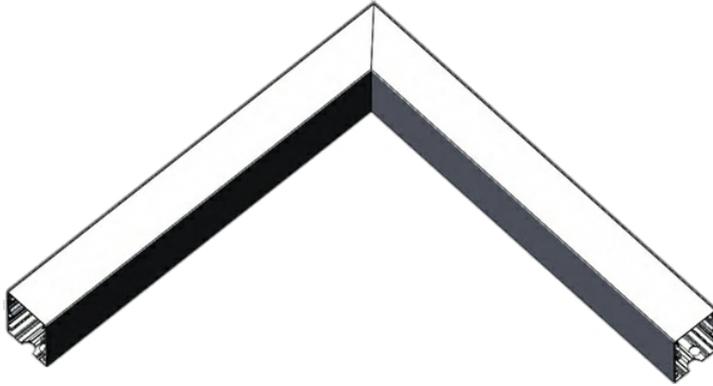

Horizontal Corners

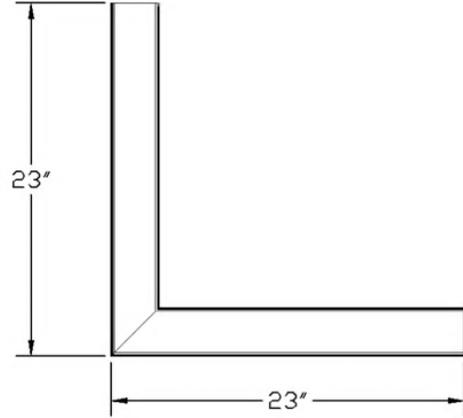

Dimensions

ORDERING CHECK LIST

- Ordering stream completely filled out with all fields. Controls and factory options are the only field that can be blank.
- Hardware kit order must include all fields.
- Two end caps provide per end cap kit. Please indicate the number of end cap kits required for job. E.g. if your fixture run includes three 8 foot fixtures in a continuous run, you will need one end cap kit. If your job requires three individual fixtures, you will need three end cap kits.
- Ensure that you have chosen the mounting type for the ceiling style you will be installing the fixture into.