

DEKKO

YOUR SINGLE POWER
SOURCE SOLUTION

PURL™ Series



Power extended.

STREAMLINE AND SHARE YOUR POWER WITH A SINGLE-OUTLET

Introducing PURL™ - an innovative, modular linking system that allows for the seamless connection of power for training, conferencing, and meeting areas. Say goodbye to awkward and restricted power arrangements, as PURL is the first UL Listed solution on the market that elegantly supports above-desk or table components. Simply link multiple power units, such as the Ashley and Electrolite Series, into the PURL linking system, and power everything with just one outlet. The under-desk system delivers a new level of versatility to training and office spaces.

This state-of-the-art system is designed to enhance your team's productivity and create an optimal work environment. The Ashley and Electrolite products are equipped with both USB A and USB C power and standard outlet power capabilities, mobile technology can be powered quickly and safely, PURL™ is an ideal solution for all your power needs.



FEATURES:

Applications


Height Adjustable Tables
 Desks
 Conference
 Training Tables

Standard Finishes

Connectors 
 Cords  
 Power Units - See specific product sell sheets for details

Components

Power Infeed/Primary FPDU
 Jumper
 Splitter
 Power Unit - Ashley or Electrolite Models
*FPDU=Furniture Power Distribution Unit

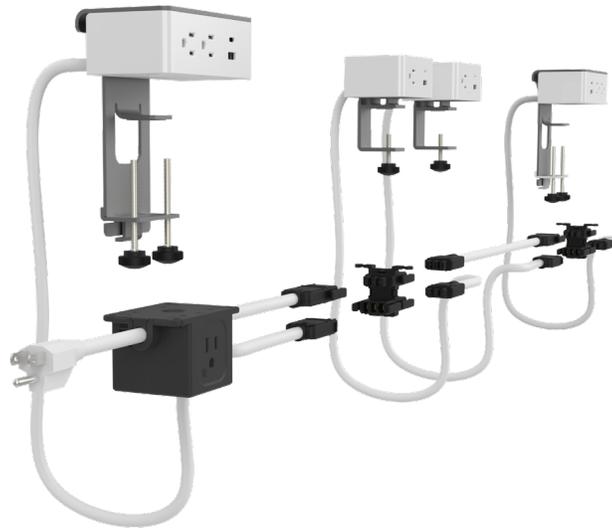


Certifications


UL 962A SD Listed

Specifications

- Single Circuit
- 15 Amp Over Current Protection
- Utilize with Studio (Ashley) and ECA (Electrolite) Power Units
- Non-sequential
- Single infeed: End or center
- Layouts capabilities: single sided or back-to-back
- Applications: HAT – Height Adjustable Tables, Conference, Training tables, and more!
- Connect up to 9 units, with up to 6 receptacles
- All receptacles are Tamper Resistant
- Power Unit Mounting: Clamp-on, Under Mount, Bezel, & Inline
- Straight & Coiled Jumpers
- Mounting hardware included
- UL Listed

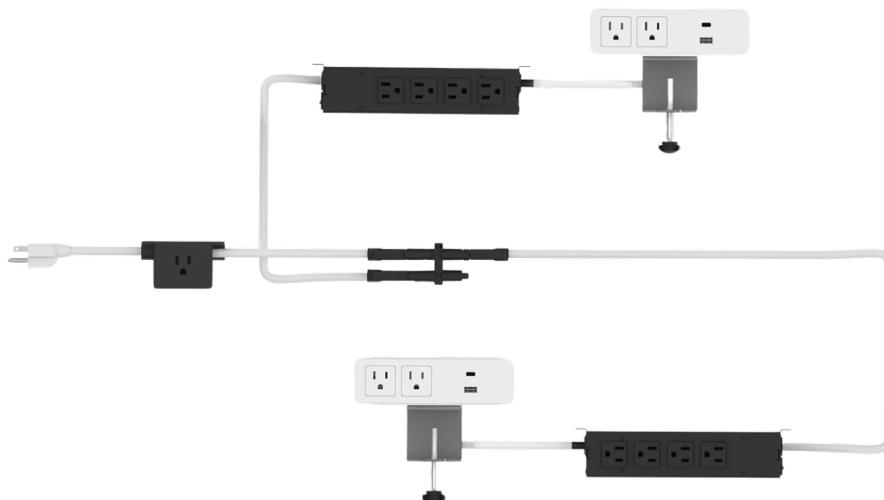

Shown: PURL with Electrolite Inline

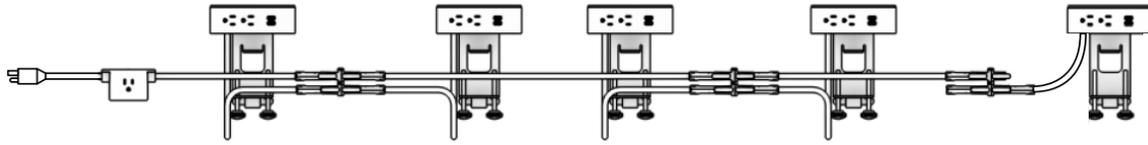

Component Details and Dimensions

Power Infeed/Primary FPDU



- Power Infeed with tamper resistant outlet and over current protection
- Total length: Up to 25'
- Primary receptacle mounts to a surface

Jumper



- STRAIGHT:
- Unlimited number of straight jumpers can be used within the overall system length of 31'.
 - Jumper Length: 1' Min - 20' Max

- COILED:
- 2' (98" extended)
 - Maximum of 3 coiled jumpers within total system

Splitter (H Connector)



- Four Ports: (1) Power In, (3) Power Out

Compatible Power Units



BY DEKKO

Ashley™: Uno, Duo, Trio (Clamp, Under, Bezel, & Inline), 1 USB A, 1 USB C, 60W



Electrolite™: USB A & C, 1U, 2U, & 3U, Clamp, Under & Inline




Specifications:


- Power Units: Ashley, Electrolite & Inline offerings
- Maximum Cord Length: 1' to 6' for all units
- Mounting: Clamp, Under & Bezel

Component Dimensions


Power Infeed/Primary FPDU

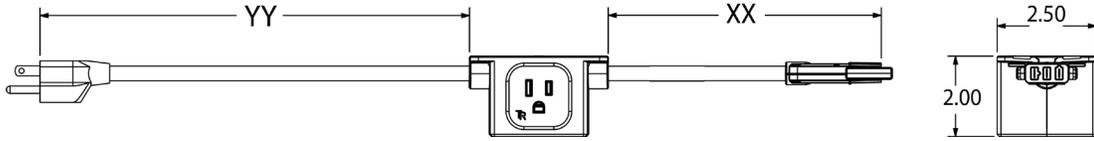

Jumper

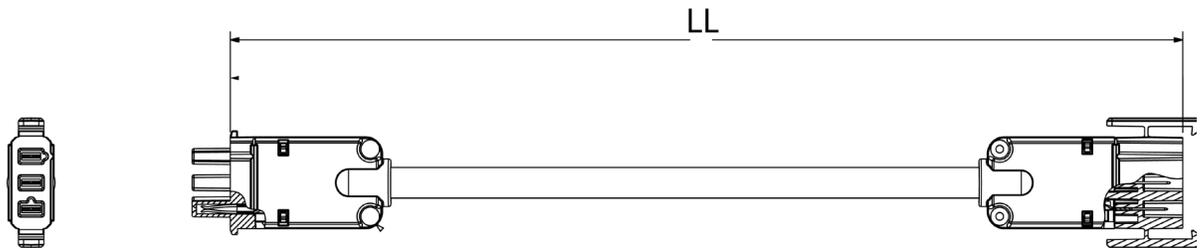

Splitter (H Connector)

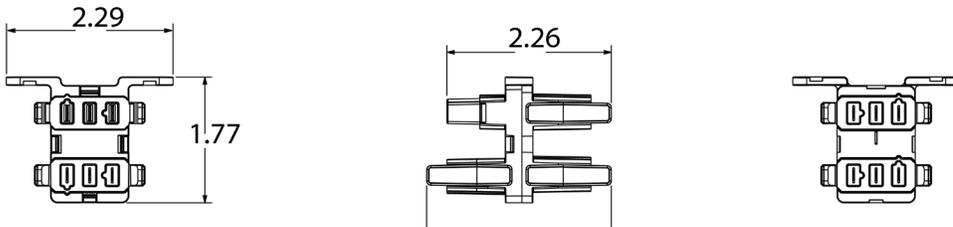

Feed configurations

Single Sided or Back to Back / End or Center Infeed

