

DEKKO

PURL™ Series



SINGLE POWER
SOURCE SOLUTIONS

Power extended.

STREAMLINE AND SHARE POWER WITH A SINGLE OUTLET

Introducing PURL™ - an innovative, modular linking system that allows for the seamless connection of power for training, conferencing, and meeting areas. Say goodbye to awkward and restricted power arrangements, as PURL is the first UL Listed solution on the market that elegantly supports above-desk or table components. Simply link multiple power units, such as the Ashley and Electrolite Series, into the PURL linking system, and power everything with just one outlet. The under-desk system delivers a new level of versatility to training and office spaces.

This state-of-the-art system is designed to enhance your team's productivity and create an optimal work environment. The Ashley and Electrolite products are equipped with both USB A and USB C power and standard outlet power capabilities, mobile technology can be powered quickly and safely, PURL™ is an ideal solution for all your power needs.



FEATURES:

Applications

Height Adjustable Tables
Desks
Conference
Training Tables

Standard Finishes

Connectors



Cords



Power Units - See specific product sell sheets for details

Components

Power Infeed/Primary FPDU

Jumper


Splitter

Power Unit - Ashley, Electrolite, Edge, Interface & Interact Models

*FPDU=Furniture Power Distribution Unit


Certifications

UL 962A SD Listed

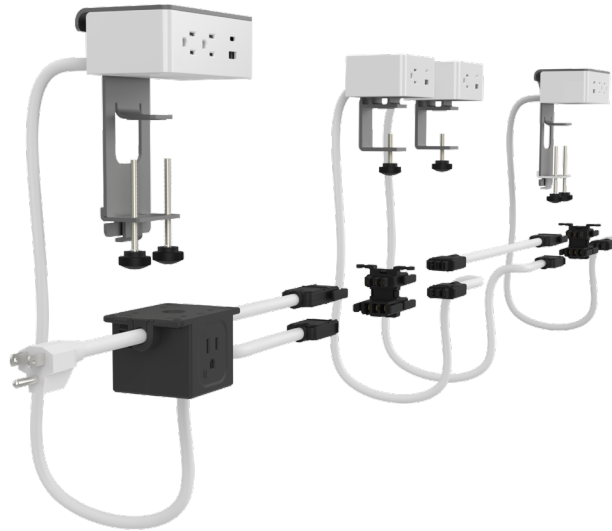


Specifications

- Single Circuit
- 15 Amp Over Current Protection
- Utilize with Ashley, Electrolite, Edge, Interface & Interact Power Units
- Non-sequential
- Single infeed: End or center
- Layouts capabilities: single sided or back-to-back
- Applications: HAT – Height Adjustable Tables, Conference, Training tables, and more!
- Connect up to 9 units, with up to 6 receptacles
- All receptacles are Tamper Resistant
- Power Unit Mounting: Clamp-on, Under Mount, Bezel, & Inline
- Straight & Coiled Jumpers
- Mounting hardware included
- UL Listed

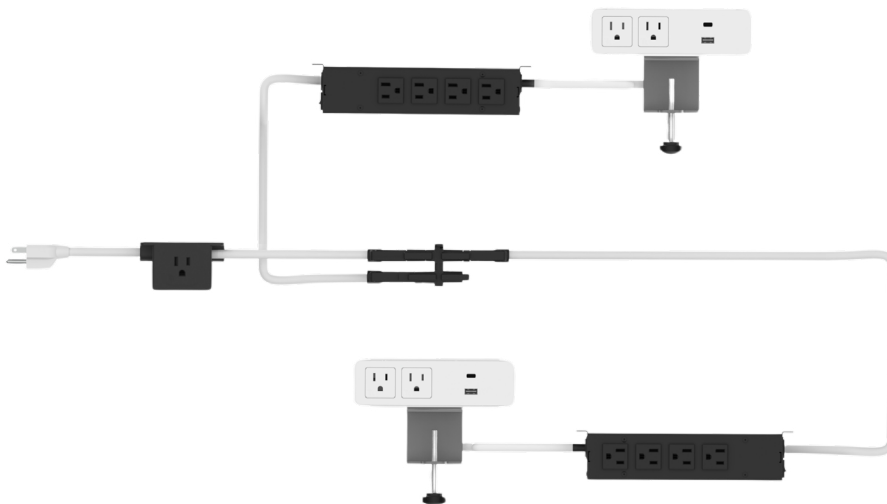

Shown: PURL with Electrolite Inline



Component Details and Dimensions

Power Infeed/Primary FPDU



- Power Infeed with tamper resistant outlet and over current protection
- Total length: Up to 25'
- Primary receptacle mounts to a surface

Jumper



STRAIGHT:

- Unlimited number of straight jumpers can be used within the overall system length of 31'.
- Jumper Length: 1' Min - 20' Max

COILED:

- 2' (98" extended)
- Maximum of 3 coiled jumpers within total system

Splitter (H Connector)



- Four Ports: (1) Power In, (3) Power Out

Compatible Power Units

- Power Units: Ashley, Electrolite, Edge, Interact & Interface Models
- Maximum Cord Length: 1' to 6' for all units
- Mounting: Clamp, Under & Bezel

Ashley™: Uno, Duo, Trio (Clamp, Under, Bezel, & Inline), 1 USB A, 1 USB C, 60W



Electrolite™: USB A & C, 1U, 2U, & 3U, Clamp, Under & Inline



Edge™: 2 Power, 1 USB A, 1 USB C, Clamp



Interact G2™: 1 USB A, 1 USB C, 1P, 2P, 4P, Data Knockout, Under




Interface G2™: 1 USB A, 1 USB C, 4P, Data Knockout, Under




Component Dimensions


Power Infeed/Primary FPDU

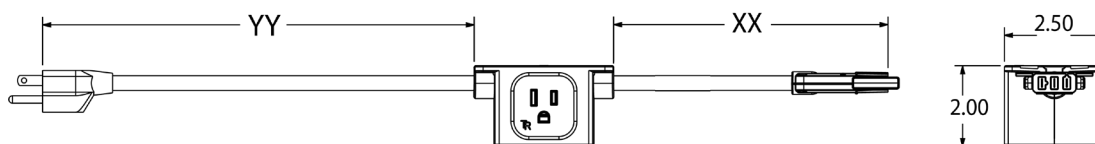

Jumper

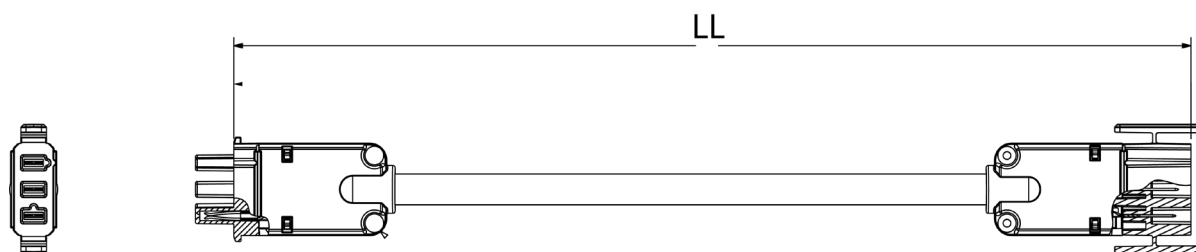


Splitter (H Connector)

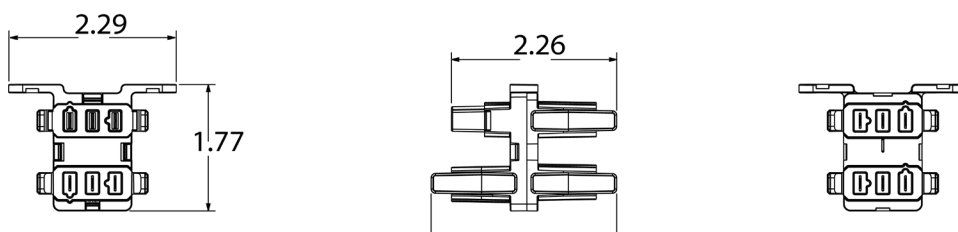

Feed configurations

Single Sided or Back to Back / End or Center Infeed

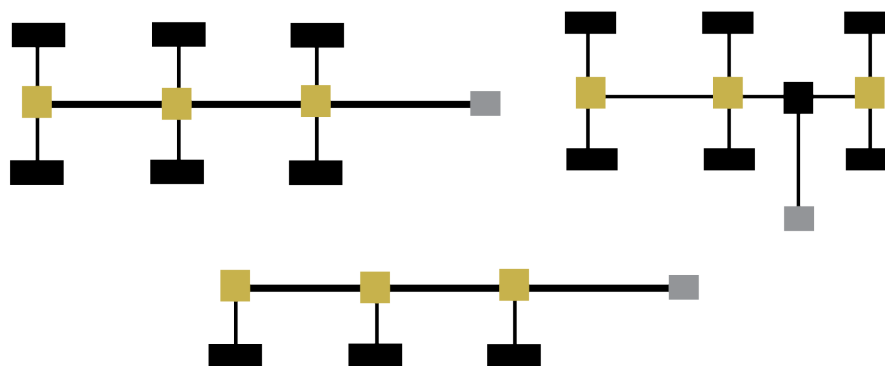


DESCRIPTION

COLOR

MODEL

PURL



Power InFeed Unit

Infeed with 1 Tamper Resistant AC 15 Amp Power Outlet and OCP, "YY" cord length from plug to simplex box and "XX" cord length from simplex box to Purl connector, white cord (mounting hardware included). *

White Cord


400150.01.57.LL

Infeed with 1 Tamper Resistant AC 15 Amp Power Outlet and OCP, "YY" cord length from plug to simplex box and "XX" cord length from simplex box to Purl connector, black cord (mounting hardware included).*

Black Cord

400150.01.04.LL

* See cord length codes below for "LL" part number options.

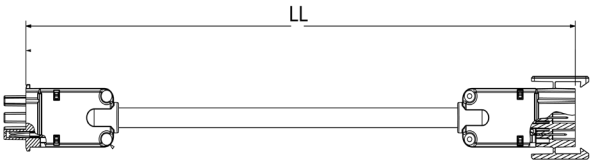

Jumpers

Jumper with male/female Purl connector at each end, black cord*

Black Cord

400151.01.04.LL

Jumper with male/female Purl connector at each end, white cord*

White Cord

400151.01.57.LL

* See cord length codes below for "LL" part number options.

2' coiled jumper (98" extended) with male/female Purl connector at each end, black cord.

Black Cord

400151.03.04

2' coiled jumper (98" extended) with male/female Purl connector at each end, white cord.

White Cord

400151.03.57

H Block Connector

Connects, 4 Purl connectors; 1 in, 3 out

Black Cord

400152.01

SPECIFICATION INSTRUCTIONS

TO ORDER PLEASE SPECIFY THE FOLLOWING FOR ASHLEY PRODUCTS

Step 1:

Base Model # (Part Number)

Step 2:

Color Options (CC)

EXAMPLE

4 0 0 1 7 5 . 0 1 . 5 7 . 0 6

Base Model: PURL

Finish Option: White/Silver

Cord Length: 6'

Code	Plastic Face/Metal Trim
.04	Black/Black
.02	Black/Silver
.08	Gray/Black
.01	Gray/Silver
.05	Gray/White
.03	White/Black
.57	White/Silver
.VW	White/White
.60	White/Bronze
.64	White/Carbon
.65	White/Latte
.66	Black/Bronze
.67	Gray/Carbon
.68	Black/Latte
.69	Black/Carbon

Step 3:

Cord Options (LL above)

INFEED CORD OPTIONS

Length Code	XX PURL	YY NEMA
.01	10'	6'
.02	2'	6'
.03	3'	6'
.04	10'	9'
.05	2'	9'
.06	3'	9'
.07	10'	10'
.08	2'	10'
.09	3'	10'

IN-LINE CORD OPTIONS

Length Code	XX JUMPER	XX PURL
.01	2'	6'
.02	3'	6'
.03	2'	9'
.04	3'	9'
.05	2'	10'
.06	3'	10'
.07	2'	12'
.08	3'	12'
.09	2'	1'

POWER UNIT & STRAIGHT JUMPERS

Cord Length Code	Length
.01	1'
.02	2'
.03	3'
.04	4'
.05	5'
.06	6'

"YY"
NEMA POWER
CORD LENGTH:
1 FT MIN.
24 FT MAX.

"XX"
PURL JUMPER
CORD LENGTH:
1 FT MIN.
24 FT MAX.



"XX"
JUMPER CORD LENGTH:
1 FT MIN.
24 FT MAX.

"YY"
PURL CORD LENGTH:
1 FT MIN.
24 FT MAX.



ASHLEY CLAMP MOUNT PRODUCTS

Ashley UNO - Clamp Mount

1 Tamper Resistant AC 15 Amp Power Outlet, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (Clamp and screws included), with Purl™ cord

400174.01.CC.LL

Ashley DUO - Clamp Mount

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (Clamp and screws included), with Purl™ cord

400175.01.CC.LL

Ashley 210 - Clamp Mount

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (Clamp and screws included), with Purl™ cord

400184.01.CC.LL

Ashley 202 - Clamp Mount

2 Tamper Resistant AC 15 Amp Power Outlets, 2 Data Knockouts with 2 Data Adapter Kits (connectors sold separately) (Clamp and screws included), with Purl™ cord

400157.01.CC.LL

Ashley TRIO - Clamp Mount

3 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port, 1 Data Knockout with 1 Data Adapter Kit (connectors sold separately) (Clamp and screws included), with Purl™ cord

400176.01.CC.LL

ASHLEY UNDERMOUNT PRODUCTS

Ashley UNO - Under Mount

1 Tamper Resistant AC 15 Amp Power Outlet, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting screws included), with Purl™ cord

400177.01.CC.LL

Ashley DUO - Under Mount

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting screws included), with Purl™ cord

400178.01.CC.LL

Ashley 210 - Under Mount

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting screws included), with Purl™ cord

400185.01.CC.LL

Ashley 202 - Under Mount

2 Tamper Resistant AC 15 Amp Power Outlets, 2 Data Knockouts with 2 Data Adapter Kits (connectors sold separately) (mounting screws included), with Purl™ cord

400165.01.CC.LL

Ashley TRIO - Under Mount

3 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port, 1 Data Knockout with 1 Data Adapter Kit (connectors sold separately) (mounting screws included), with Purl™ cord

400179.01.CC.LL

ASHLEY BEZEL PRODUCTS**Ashley UNO - Bezel Mount**

1 Tamper Resistant AC 15 Amp Power Outlet, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting screws included), with Purl™ cord

400209.01.CC.LL

Ashley 202 - Bezel Mount

2 Tamper Resistant AC 15 Amp Power Outlets, 2 Data Knockouts with 2 Data Adapter Kits (connectors sold separately) (mounting screws included), with Purl™ cord

400201.01.CC.LL

Ashley TRIO - Bezel Mount

3 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port, 1 Data Knockout with 1 Data Adapter Kit (connectors sold separately) (mounting screws included), with Purl™ cord

400223.01.CC.LL

ASHLEY IN-LINE PRODUCTS**Ashley UNO Clamp Mount - In-Line 4 Power**

1 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an In-Line under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (Clamp and screws included)

400174.22.CC.LL

Ashley Duo Clamp Mount - In-Line 4 Power

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an In-Line under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (Clamp and screws included)

400175.22.CC.LL

Ashley 210 Clamp Mount - In-Line 4 Power

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an In-Line under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (Clamp and screws included)

400184.22.CC.LL

Ashley UNO Under Mount - In-line 4 Power

1 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an In-Line under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (mounting screws included)

400177.22.CC.LL

Ashley DUO Under Mount - In-line 4 Power

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an In-Line under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (mounting screws included)

400178.22.CC.LL

Ashley 210 Under Mount - In-line 4 Power

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an In-Line under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (mounting screws included)

400185.22.CC.LL

Ashley 202 Under Mount - In-line 4 Power

2 Tamper Resistant AC 15 Amp Power Outlets, 2 Data Knockouts with 2 Data Adapter Kits (connectors sold separately) connected to an In-Line under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (mounting screws included)

400165.22.CC.LL

SPECIFICATION INSTRUCTIONS

TO ORDER PLEASE SPECIFY THE FOLLOWING FOR ELECTROLITE PRODUCTS

Step 1:

Base Model # (Part Number)

Step 2:

Color Options (CC)

EXAMPLE

400272.01.BB.06

Base Model: PURL

Finish Option: Black/Black

Cord Length: 6'

First X = Body Color

- B = Black (Textured)

- BB: Black Body, Black Face

- BW: Black Body, White Face

- WB: White Body, Black Face

- S = Silver (Smooth)

- SS: Silver Body, Silver Face

- SW = Silver Body, White Face

- WS = White Body, Silver Face

- W = White (Smooth)

- WW: White Body, White Face

Second X = Face Color

- Z = Bronze (Smooth)

- ZZ: Bronze Body, Bronze Face

- ZW: Bronze Body, White Face

- WZ: White Body, Bronze Face

- L = Latte (Textured)

- LL: Latte Body, Latte Face

- LW = Latte Body, White Face

- WL = White Body, Latte Face

- C = Carbon (Textured)

- CC: Carbon Body, Carbon Face

- CW: Carbon Body, White Face

- WC: White Body, Carbon Face

Step 3:

Cord Options (LL above)

INFEED CORD OPTIONSG

Length Code	XX PURL	YY NEMA
.01	10'	6'
.02	2'	6'
.03	3'	6'
.04	10'	9'
.05	2'	9'
.06	3'	9'
.07	10'	10'
.08	2'	10'
.09	3'	10'

"YY"

NEMA POWER

CORD LENGTH:

1 FT MIN.

24 FT MAX.

"XX"

PURL JUMPER

CORD LENGTH:

1 FT MIN.

24 FT MAX.

IN-LINE CORD OPTIONS

Length Code	XX JUMPER	XX PURL
.01	2'	6'
.02	3'	6'
.03	2'	9'
.04	3'	9'
.05	2'	10'
.06	3'	10'
.07	2'	12'
.08	3'	12'
.09	2'	1'

"XX"

JUMPER CORD LENGTH:

1 FT MIN.

24 FT MAX.

"YY"

PURL CORD LENGTH:

1 FT MIN.

24 FT MAX.

POWER UNIT & STRAIGHT JUMPERS

Cord Length Code	Length
.01	1'
.02	2'
.03	3'
.04	4'
.05	5'
.06	6'

7310 Innovation Blvd., Suite 104, Fort Wayne, IN 46818 | P: (800) 829-3101 | F: (260) 357-4293 | Dekko.com

10

DESCRIPTION	MODEL
ELECTROLITE CLAMP MOUNT PRODUCTS	
Electrolite USB Clamp Mount 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (Clamp and screws included), with Purl™ cord	400198.01.CC.LL
Electrolite 1 Power - Clamp Mount 1 Tamper Resistant AC 15 Amp Power Outlet, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (Clamp and screws included), with Purl™ cord	400187.01.CC.LL
Electrolite 2 Power - Clamp Mount 2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (Clamp and screws included), with Purl™ cord	400188.01.CC.LL
Electrolite 3 Power - Clamp Mount 3 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port, 1 Data Knockout with 1 Data Adapter Kit (connectors sold separately) (Clamp and screws included), with Purl™ cord	400189.01.CC.LL
ELECTROLITE UNDER MOUNT PRODUCTS	
Electrolite USB Under Mount 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting screws included), with Purl™ cord	400199.01.CC.LL
Electrolite 1 Power - Under Mount 1 Tamper Resistant AC 15 Amp Power Outlet, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting screws included), with Purl™ cord	400232.01.CC.LL
Electrolite 2 Power - Under Mount 2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting screws included), with Purl™ cord	400191.01.CC.LL
Electrolite 3 Power - Under Mount 3 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port, 1 Data Knockout with 1 Data Adapter Kit (connectors sold separately) (mounting screws included), with Purl™ cord	400192.01.CC.LL

ELECTROLITE IN-LINE PRODUCTS**Electrolite USB Clamp Mount - Inline 4 Power**

1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an InLine under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord (mounting screws included).

400198.22.CC.LL

Electrolite 1 Power Clamp Mount - Inline 4 Power

1 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an InLine under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (mounting screws included)

400187.22.CC.LL

Electrolite 2 Power Clamp Mount - Inline 4 Power

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an InLine under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (mounting screws included)

400188.22.CC.LL

Electrolite USB Under Mount - Inline 4 Power

1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging port connected to an InLine under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord (mounting screws included).

400199.22.CC.LL

Electrolite 1 Power Under Mount - Inline 4 Power

1 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an InLine under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (mounting screws included)

400232.22.CC.LL

Electrolite 2 Power Under Mount - Inline 4 Power

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an InLine under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (mounting screws included)

400191.22.CC.LL

Electrolite USB Clamp Mount - Inline 6 Power

1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an InLine under-mounted unit with 6 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord (mounting screws included).

400198.36.CC.LL

Electrolite USB Under Mount - Inline 4 Power

1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an InLine under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord (mounting screws included).

400199.36.CC.LL

SPECIFICATION INSTRUCTIONS

TO ORDER PLEASE SPECIFY THE FOLLOWING FOR EDGE PRODUCTS

Step 1:

Base Model # (Part Number)

Step 2:

Color Options (CC)

EXAMPLE

400329.04.02

Base Model: PURL
Finish Option: Black
Cord Length: 2'

Code:

Painted Metal

.04

Black

.VW

White

Step 3:

Cord Options (LL above)

INFEED CORD OPTIONS

Length Code	XX PURL	YY NEMA
.01	10'	6'
.02	2'	6'
.03	3'	6'
.04	10'	9'
.05	2'	9'
.06	3'	9'
.07	10'	10'
.08	2'	10'
.09	3'	10'

"YY"

NEMA POWER

CORD LENGTH:

1 FT MIN.

24 FT MAX.


"XX"

PURL JUMPER

CORD LENGTH:

1 FT MIN.

24 FT MAX.



IN-LINE CORD OPTIONS

Length Code	XX JUMPER	XX PURL
.01	2'	6'
.02	3'	6'
.03	2'	9'
.04	3'	9'
.05	2'	10'
.06	3'	10'
.07	2'	12'
.08	3'	12'
.09	2'	1'

"XX"

JUMPER CORD LENGTH:

1 FT MIN.


24 FT MAX.

"YY"

PURL CORD LENGTH:

1 FT MIN.

24 FT MAX.



POWER UNIT & STRAIGHT JUMPERS

Cord Length Code	Length
.01	1'
.02	2'
.03	3'
.04	4'
.05	5'
.06	6'

DESCRIPTION	MODEL
<div>EDGE</div> <div>Edge Clamp Mount</div> <div>2 Tamper Resistant AC 15 AMP Power Outlets, (1) QC 3.0 reversible USB-A Charging Port & (1) 30-Watt USB-C Power Delivery Port Various cord lengths available with Purl™ cord (mounting screws included).</div>	400329.CC.LL

7310 Innovation Blvd., Suite 104, Fort Wayne, IN 46818 | P: (800) 829-3101 | F: (260) 357-4293 | Dekko.com

13

SPECIFICATION INSTRUCTIONS

TO ORDER PLEASE SPECIFY THE FOLLOWING FOR INTERACT AND INTERFACE PRODUCTS

Step 1:	Step 2:
Base Model # (Part Number)	Color Options (CC)

EXAMPLE

400272.01.BB.06

Base Model: PURL
Finish Option: Black/Black
Cord Length: 6'

Code:	Painted Metal
.25	Silver
.04	Black
.VW	White
.28	Bronze
.31	Latte
.34	Carbon
.53	Brushed Aluminum
.52	Brushed Stainless

Step 3:
Cord Options (LL above)

INFEED CORD OPTIONSG

Length Code	XX PURL	YY NEMA
.01	10'	6'
.02	2'	6'
.03	3'	6'
.04	10'	9'
.05	2'	9'
.06	3'	9'
.07	10'	10'
.08	2'	10'
.09	3'	10'

"YY"
NEMA POWER
CORD LENGTH:
1 FT MIN.
24 FT MAX.

"XX"
PURL JUMPER
CORD LENGTH:
1 FT MIN.
24 FT MAX.

IN-LINE CORD OPTIONS

Length Code	XX JUMPER	XX PURL
.01	2'	6'
.02	3'	6'
.03	2'	9'
.04	3'	9'
.05	2'	10'
.06	3'	10'
.07	2'	12'
.08	3'	12'
.09	2'	1'

"XX"
JUMPER CORD LENGTH:
1 FT MIN.
24 FT MAX.

"YY"
PURL CORD LENGTH:
1 FT MIN.
24 FT MAX.

POWER UNIT & STRAIGHT JUMPERS

Cord Length Code	Length
.01	1'
.02	2'
.03	3'
.04	4'
.05	5'
.06	6'

INTERACT PRODUCTS

INTERACT G2 - 1 POWER

1 Tamper Resistant AC 15 Amp Power Outlet, 1 USB-A 2.4 Amp Charging Port & 1 60- Watt USB-C Power Delivery Charging Port (mounting brackets included), 2 RJ knockout, 1 telecom plate knockout, surface mounted, with Purl™ cord

400389.01.CC.LL

INTERACT G2 UT - 1 POWER

1 Tamper Resistant AC 15 Amp Power Outlet, 1 USB-A 2.4 Amp Charging Port & 1 60- Watt USB-C Power Delivery Charging Port, 2 data knockout, under mounted, with Purl™ cord

400390.01.CC.LL

INTERACT G2 - 2 POWER

2 Tamper Resistant AC 15 Amp Power Outlets , 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting brackets included), 2 data knockouts, 1 telecom plate knockout, surface mounted, with Purl™ cord

400386.01.CC.LL

INTERACT G2 UT- 2 POWER

2 Tamper Resistant AC 15 Amp Power Outlets , 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting screws included), 2 RJ data knockouts, 1 telecom plate knockout, under mounted, with Purl™ cord

400388.01.CC.LL

INTERACT IV G2 - 4 POWER

4 Tamper Resistant AC 15 Amp Power Outlets , 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting brackets included), 1 convenience outlet, surface mounted with Purl™ cord

400385.01.CC.LL

INTERACT IV G2 UT - 4 POWER

4 Tamper Resistant AC 15 Amp Power Outlets , 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port , 1 convenience outlet, under mounted with Purl™ cord

400387.01.CC.LL

INTERFACE PRODUCTS

INTERFACE G2 - 4 POWER

4 Tamper Resistant AC 15 Amp Power Outlet, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting brackets included), 3 telecom plate knockouts, surface mounted, with Purl™ cord

400391.01.CC.LL

INTERACT G2 UT- 4 POWER

4 Tamper Resistant AC 15 Amp Power Outlet, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port, 3 telecom plate knockouts, under mounted, with Purl™ cord

400392.01.CC.LL