

DEKKO

PURL™ Series



SINGLE POWER  
SOURCE SOLUTIONS

# Power extended.

## STREAMLINE AND SHARE POWER WITH A SINGLE OUTLET

Introducing PURL™ - an innovative, modular linking system that allows for the seamless connection of power for training, conferencing, and meeting areas. Say goodbye to awkward and restricted power arrangements, as PURL is the first UL Listed solution on the market that elegantly supports above-desk or table components. Simply link multiple power units, such as the Ashley and Electrolite Series, into the PURL linking system, and power everything with just one outlet. The under-desk system delivers a new level of versatility to training and office spaces.

This state-of-the-art system is designed to enhance your team's productivity and create an optimal work environment. The Ashley and Electrolite products are equipped with both USB A and USB C power and standard outlet power capabilities, mobile technology can be powered quickly and safely, PURL™ is an ideal solution for all your power needs.



## FEATURES:

### Applications

Height Adjustable Tables  
Desks  
Conference  
Training Tables

### Standard Finishes

Connectors



Cords



Power Units - See specific product sell sheets for details

### Components

Power Infeed/Primary FPDU

Jumper


Splitter

Power Unit - Ashley, Electrolite, Edge, Interface & Interact Models

\*FPDU=Furniture Power Distribution Unit


### Certifications

UL 962A SD Listed

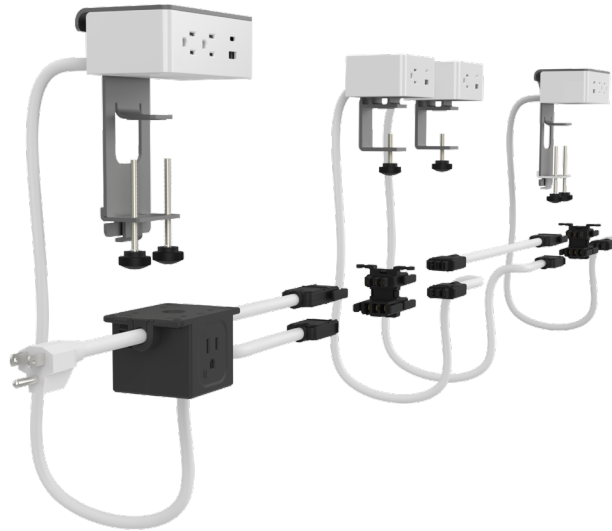


### Specifications

- Single Circuit
- 15 Amp Over Current Protection
- Utilize with Ashley, Electrolite, Edge, Interface & Interact Power Units
- Non-sequential
- Single infeed: End or center
- Layouts capabilities: single sided or back-to-back
- Applications: HAT – Height Adjustable Tables, Conference, Training tables, and more!
- Connect up to 9 units, with up to 6 receptacles
- All receptacles are Tamper Resistant
- Power Unit Mounting: Clamp-on, Under Mount, Bezel, & Inline
- Straight & Coiled Jumpers
- Mounting hardware included
- UL Listed

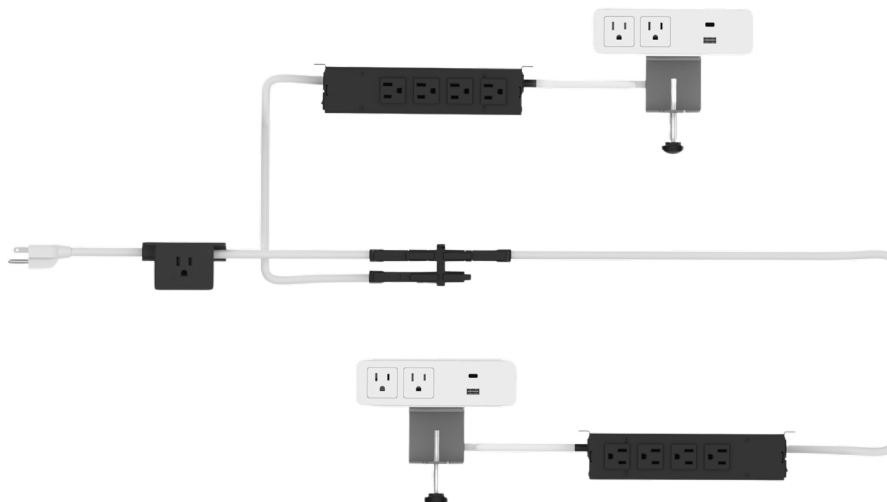

Shown: PURL with Electrolite Inline



## Component Details and Dimensions

### Power Infeed/Primary FPDU



- Power Infeed with tamper resistant outlet and over current protection
- Total length: Up to 25'
- Primary receptacle mounts to a surface

### Jumper



#### STRAIGHT:

- Unlimited number of straight jumpers can be used within the overall system length of 31'.
- Jumper Length: 1' Min - 20' Max

#### COILED:

- 2' (98" extended)
- Maximum of 3 coiled jumpers within total system

### Splitter (H Connector)



- Four Ports: (1) Power In, (3) Power Out

## Compatible Power Units

- Power Units: Ashley, Electrolite, Edge, Interact & Interface, Oasis & Oasis Mini Models
- Maximum Cord Length: 1' to 6' for all units
- Mounting: Clamp, Under & Bezel/In-Surface

**Ashley™:** Uno, Duo, Trio  
(Clamp, Under, Bezel, & Inline),  
1 USB A, 1 USB C, 60W



**Electrolite™:** USB A & C,  
1U, 2U, & 3U, Clamp,  
Under & Inline



**Edge™:** 2 Power,  
1 USB A, 1 USB C,  
Clamp



**Interact G2™:** 1 USB A, 1 USB C,  
1P, 2P, 4P, Data Knockout, Under



**Interface G2™:** 1 USB A, 1 USB C,  
4P, Data Knockout, Under



**Oasis™:** 2-6 USB A, 2-6 USB C,  
6-12P, 2-6 Data Knockout, Under,  
In-Surface




**Oasis™ Mini:** 1-3 USB A,  
1-3 USB C, 3-6P, 1-3 Data  
Knockout, Under, In-Surface




## Component Dimensions


### Power Infeed/Primary FPDU

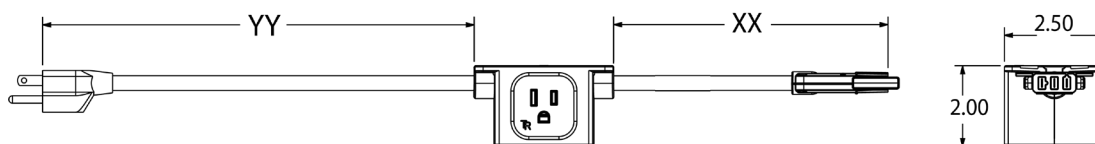

### Jumper

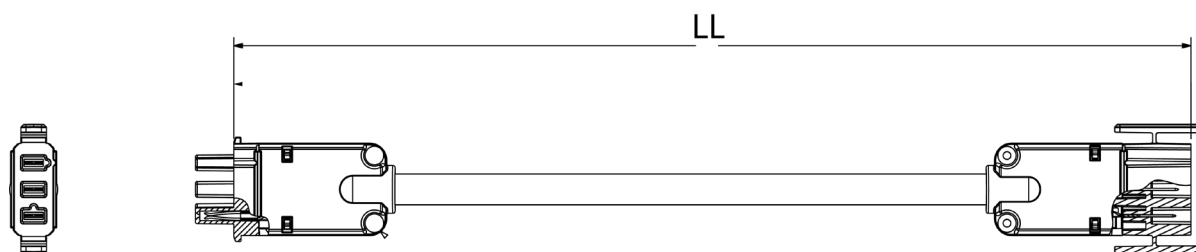


### Splitter (H Connector)

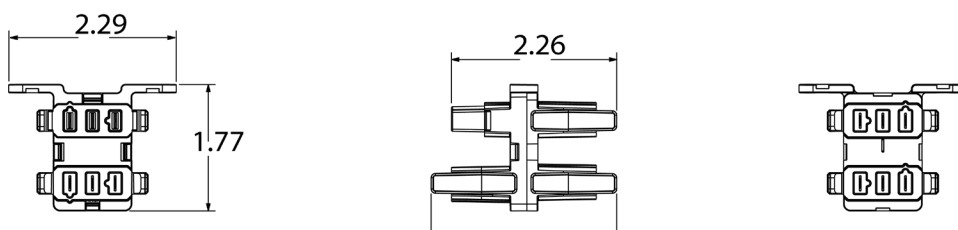

## Feed configurations

Single Sided or Back to Back / End or Center Infeed

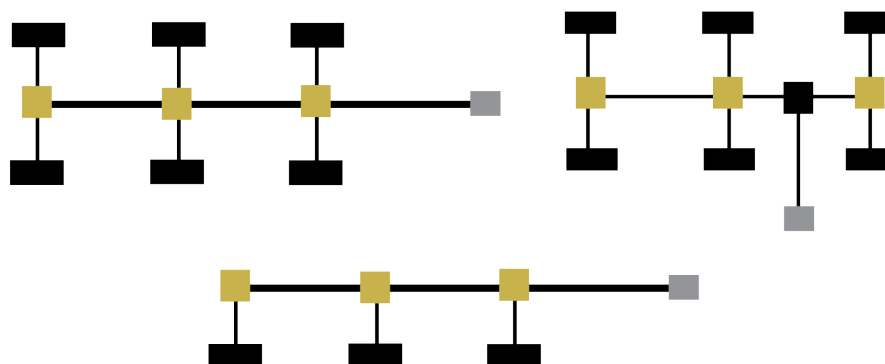


DESCRIPTION

COLOR

MODEL

PURL



Power InFeed Unit

Infeed with 1 Tamper Resistant AC 15 Amp Power Outlet and OCP, "YY" cord length from plug to simplex box and "XX" cord length from simplex box to Purl connector, white cord (mounting hardware included). \*

White Cord


400150.01.57.LL

Infeed with 1 Tamper Resistant AC 15 Amp Power Outlet and OCP, "YY" cord length from plug to simplex box and "XX" cord length from simplex box to Purl connector, black cord (mounting hardware included).\*

Black Cord

400150.01.04.LL

\* See cord length codes below for "LL" part number options.

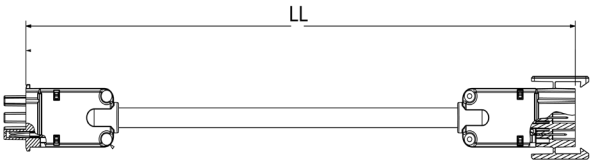

Jumpers

Jumper with male/female Purl connector at each end, black cord\*

Black Cord

400151.01.04.LL

Jumper with male/female Purl connector at each end, white cord\*

White Cord

400151.01.57.LL

\* See cord length codes below for "LL" part number options.

2' coiled jumper (98" extended) with male/female Purl connector at each end, black cord.

Black Cord

400151.03.04

2' coiled jumper (98" extended) with male/female Purl connector at each end, white cord.

White Cord

400151.03.57

H Block Connector

Connects, 4 Purl connectors; 1 in, 3 out

Black Cord

400152.01

SPECIFICATION INSTRUCTIONS

TO ORDER PLEASE SPECIFY THE FOLLOWING FOR ASHLEY PRODUCTS

Step 1:

Base Model # (Part Number)

Step 2:

Color Options (CC)

EXAMPLE

400175.01.57.06

Base Model: PURL

Finish Option: White/Silver

Cord Length: 6'

Code	Plastic Face/Metal Trim
.04	Black/Black
.02	Black/Silver
.08	Gray/Black
.01	Gray/Silver
.05	Gray/White
.03	White/Black
.57	White/Silver
.VW	White/White
.60	White/Bronze
.64	White/Carbon
.65	White/Latte
.66	Black/Bronze
.67	Gray/Carbon
.68	Black/Latte
.69	Black/Carbon

Step 3:

Cord Options (LL above)

INFEED CORD OPTIONS

Length Code	XX PURL	YY NEMA
.01	10'	6'
.02	2'	6'
.03	3'	6'
.04	10'	9'
.05	2'	9'
.06	3'	9'
.07	10'	10'
.08	2'	10'
.09	3'	10'

"YY"

NEMA POWER

CORD LENGTH:

1 FT MIN.

24 FT MAX.


"XX"

PURL JUMPER

CORD LENGTH:

1 FT MIN.

24 FT MAX.



IN-LINE CORD OPTIONS

Length Code	XX JUMPER	XX PURL
.01	2'	6'
.02	3'	6'
.03	2'	9'
.04	3'	9'
.05	2'	10'
.06	3'	10'
.07	2'	12'
.08	3'	12'
.09	2'	1'

"XX"

JUMPER CORD LENGTH:

1 FT MIN.


24 FT MAX.

"YY"

PURL CORD LENGTH:

1 FT MIN.

24 FT MAX.



POWER UNIT & STRAIGHT JUMPERS

Cord Length Code	Length
.01	1'
.02	2'
.03	3'
.04	4'
.05	5'
.06	6'

**ASHLEY CLAMP MOUNT PRODUCTS****Ashley UNO - Clamp Mount**

1 Tamper Resistant AC 15 Amp Power Outlet, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (Clamp and screws included), with Purl™ cord

400174.01.CC.LL

**Ashley DUO - Clamp Mount**

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (Clamp and screws included), with Purl™ cord

400175.01.CC.LL

**Ashley 210 - Clamp Mount**

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (Clamp and screws included), with Purl™ cord

400184.01.CC.LL

**Ashley 202 - Clamp Mount**

2 Tamper Resistant AC 15 Amp Power Outlets, 2 Data Knockouts with 2 Data Adapter Kits (connectors sold separately) (Clamp and screws included), with Purl™ cord

400157.01.CC.LL

**Ashley TRIO - Clamp Mount**

3 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port, 1 Data Knockout with 1 Data Adapter Kit (connectors sold separately) (Clamp and screws included), with Purl™ cord

400176.01.CC.LL

**ASHLEY UNDERMOUNT PRODUCTS****Ashley UNO - Under Mount**

1 Tamper Resistant AC 15 Amp Power Outlet, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting screws included), with Purl™ cord

400177.01.CC.LL

**Ashley DUO - Under Mount**

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting screws included), with Purl™ cord

400178.01.CC.LL

**Ashley 210 - Under Mount**

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting screws included), with Purl™ cord

400185.01.CC.LL

**Ashley 202 - Under Mount**

2 Tamper Resistant AC 15 Amp Power Outlets, 2 Data Knockouts with 2 Data Adapter Kits (connectors sold separately) (mounting screws included), with Purl™ cord

400165.01.CC.LL

**Ashley TRIO - Under Mount**

3 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port, 1 Data Knockout with 1 Data Adapter Kit (connectors sold separately) (mounting screws included), with Purl™ cord

400179.01.CC.LL



---

**ASHLEY IN-SURFACE PRODUCTS****Ashley UNO - Bezel Mount**

1 Tamper Resistant AC 15 Amp Power Outlet, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting screws included), with Purl™ cord

400209.01.CC.LL

---

**Ashley 202 - Bezel Mount**

2 Tamper Resistant AC 15 Amp Power Outlets, 2 Data Knockouts with 2 Data Adapter Kits (connectors sold separately) (mounting screws included), with Purl™ cord

400201.01.CC.LL

---

**Ashley DUO Air - In-Surface Pop-Up**

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port, with Purl™ cord

400260.01.CC.LL

---

**Ashley DUO - Bezel Mount**

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting screws included) ,with Purl™ cord

400211.01.CC.LL

---

**Ashley TRIO - Bezel Mount**

3 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port, 1 Data Knockout with 1 Data Adapter Kit (connectors sold separately) (mounting screws included), with Purl™ cord

400223.01.CC.LL

---

**ASHLEY IN-LINE PRODUCTS****Ashley UNO Clamp Mount - In-Line 4 Power**

1 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an In-Line under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (Clamp and screws included)

400174.22.CC.LL

---

**Ashley Duo Clamp Mount - In-Line 4 Power**

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an In-Line under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (Clamp and screws included)

400175.22.CC.LL

---

**Ashley 210 Clamp Mount - In-Line 4 Power**

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an In-Line under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (Clamp and screws included)

400184.22.CC.LL

---

**Ashley UNO Under Mount - In-line 4 Power**

1 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an In-Line under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (mounting screws included)

400177.22.CC.LL

---

**Ashley DUO Under Mount - In-line 4 Power**

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an In-Line under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (mounting screws included)

400178.22.CC.LL

---

**Ashley 210 Under Mount - In-line 4 Power**

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an In-Line under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (mounting screws included)

400185.22.CC.LL

---

**Ashley 202 Under Mount - In-line 4 Power**

2 Tamper Resistant AC 15 Amp Power Outlets, 2 Data Knockouts with 2 Data Adapter Kits (connectors sold separately) connected to an In-Line under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (mounting screws included)

400165.22.CC.LL

SPECIFICATION INSTRUCTIONS

TO ORDER PLEASE SPECIFY THE FOLLOWING FOR ELECTROLITE PRODUCTS

Step 1:

Base Model # (Part Number)

Step 2:

Color Options (CC)

EXAMPLE

4 0 0 2 7 2 . 0 1 . B B . 0 6

Base Model: PURL

Finish Option: Black/Black

Cord Length: 6'

First X = Body Color

- B = Black (Textured)

- BB: Black Body, Black Face

- BW: Black Body, White Face

- WB: White Body, Black Face

- S = Silver (Smooth)

- SS: Silver Body, Silver Face

- SW = Silver Body, White Face

- WS = White Body, Silver Face

- W = White (Smooth)

- WW: White Body, White Face

Second X = Face Color

- Z = Bronze (Smooth)

- ZZ: Bronze Body, Bronze Face

- ZW: Bronze Body, White Face

- WZ: White Body, Bronze Face

- L = Latte (Textured)

- LL: Latte Body, Latte Face

- LW = Latte Body, White Face

- WL = White Body, Latte Face

- C = Carbon (Textured)

- CC: Carbon Body, Carbon Face

- CW: Carbon Body, White Face

- WC: White Body, Carbon Face

Step 3:

Cord Options (LL above)

INFEED CORD OPTIONSG

Length Code	XX PURL	YY NEMA
.01	10'	6'
.02	2'	6'
.03	3'	6'
.04	10'	9'
.05	2'	9'
.06	3'	9'
.07	10'	10'
.08	2'	10'
.09	3'	10'

"YY"

NEMA POWER

CORD LENGTH:

1 FT MIN.

24 FT MAX.


"XX"

PURL JUMPER

CORD LENGTH:

1 FT MIN.

24 FT MAX.



IN-LINE CORD OPTIONS

Length Code	XX JUMPER	XX PURL
.01	2'	6'
.02	3'	6'
.03	2'	9'
.04	3'	9'
.05	2'	10'
.06	3'	10'
.07	2'	12'
.08	3'	12'
.09	2'	1'

"XX"

JUMPER CORD LENGTH:

1 FT MIN.

24 FT MAX.

"YY"

PURL CORD LENGTH:

1 FT MIN.

24 FT MAX.



POWER UNIT & STRAIGHT JUMPERS

Cord Length Code	Length
.01	1'
.02	2'
.03	3'
.04	4'
.05	5'
.06	6'

7310 Innovation Blvd., Suite 104, Fort Wayne, IN 46818 | P: (800) 829-3101 | F: (260) 357-4293 | Dekko.com

11

DESCRIPTION	MODEL
<b>ELECTROLITE CLAMP MOUNT PRODUCTS</b>	
<b>Electrolite USB Clamp Mount</b> 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (Clamp and screws included), with Purl™ cord	400198.01.CC.LL
<b>Electrolite 1 Power - Clamp Mount</b> 1 Tamper Resistant AC 15 Amp Power Outlet, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (Clamp and screws included), with Purl™ cord	400187.01.CC.LL
<b>Electrolite 2 Power - Clamp Mount</b> 2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (Clamp and screws included), with Purl™ cord	400188.01.CC.LL
<b>Electrolite 3 Power - Clamp Mount</b> 3 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port, 1 Data Knockout with 1 Data Adapter Kit (connectors sold separately) (Clamp and screws included), with Purl™ cord	400189.01.CC.LL
<b>ELECTROLITE UNDER MOUNT PRODUCTS</b>	
<b>Electrolite USB Under Mount</b> 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting screws included), with Purl™ cord	400199.01.CC.LL
<b>Electrolite 1 Power - Under Mount</b> 1 Tamper Resistant AC 15 Amp Power Outlet, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting screws included), with Purl™ cord	400232.01.CC.LL
<b>Electrolite 2 Power - Under Mount</b> 2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting screws included), with Purl™ cord	400191.01.CC.LL
<b>Electrolite 3 Power - Under Mount</b> 3 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port, 1 Data Knockout with 1 Data Adapter Kit (connectors sold separately) (mounting screws included), with Purl™ cord	400192.01.CC.LL
<b>ELECTROLITE IN-SURFACE MOUNT PRODUCTS</b>	
<b>Electrolite USB In-Surface</b> 2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port, with Purl™ cord	400383.09.CC.LL

**ELECTROLITE IN-LINE PRODUCTS****Electrolite USB Clamp Mount - Inline 4 Power**

1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an InLine under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord (mounting screws included).

400198.22.CC.LL

**Electrolite 1 Power Clamp Mount - Inline 4 Power**

1 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an InLine under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (mounting screws included)

400187.22.CC.LL

**Electrolite 2 Power Clamp Mount - Inline 4 Power**

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an InLine under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (mounting screws included)

400188.22.CC.LL

**Electrolite USB Under Mount - Inline 4 Power**

1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging port connected to an InLine under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord (mounting screws included).

400199.22.CC.LL

**Electrolite 1 Power Under Mount - Inline 4 Power**

1 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an InLine under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (mounting screws included)

400232.22.CC.LL

**Electrolite 2 Power Under Mount - Inline 4 Power**

2 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an InLine under-mounted unit with 4 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord. (mounting screws included)

400191.22.CC.LL

**Electrolite USB Clamp Mount - Inline 6 Power**

1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an InLine under-mounted unit with 6 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord (mounting screws included).

400198.36.CC.LL

**Electrolite USB Under Mount - Inline 6 Power**

1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port connected to an InLine under-mounted unit with 6 Tamper Resistant convenience outlets. Various cord lengths available with Purl™ cord (mounting screws included).

400199.36.CC.LL

SPECIFICATION INSTRUCTIONS

TO ORDER PLEASE SPECIFY THE FOLLOWING FOR EDGE PRODUCTS

Step 1:

Base Model # (Part Number)

Step 2:

Color Options (CC)

EXAMPLE

400329.04.02

Base Model: PURL  
Finish Option: Black  
Cord Length: 2'

Code:

Painted Metal

.04

Black

.VW

White

Step 3:

Cord Options (LL above)

INFEED CORD OPTIONS

Length Code	XX PURL	YY NEMA
.01	10'	6'
.02	2'	6'
.03	3'	6'
.04	10'	9'
.05	2'	9'
.06	3'	9'
.07	10'	10'
.08	2'	10'
.09	3'	10'

"YY"

NEMA POWER

CORD LENGTH:

1 FT MIN.

24 FT MAX.


"XX"

PURL JUMPER

CORD LENGTH:

1 FT MIN.

24 FT MAX.



IN-LINE CORD OPTIONS

Length Code	XX JUMPER	XX PURL
.01	2'	6'
.02	3'	6'
.03	2'	9'
.04	3'	9'
.05	2'	10'
.06	3'	10'
.07	2'	12'
.08	3'	12'
.09	2'	1'

"XX"

JUMPER CORD LENGTH:

1 FT MIN.


24 FT MAX.

"YY"

PURL CORD LENGTH:

1 FT MIN.

24 FT MAX.



POWER UNIT & STRAIGHT JUMPERS

Cord Length Code	Length
.01	1'
.02	2'
.03	3'
.04	4'
.05	5'
.06	6'

DESCRIPTION	MODEL
<div>EDGE</div> <div>Edge Clamp Mount</div> <div>2 Tamper Resistant AC 15 AMP Power Outlets, (1) QC 3.0 reversible USB-A Charging Port &amp; (1) 30-Watt USB-C Power Delivery Port Various cord lengths available with Purl™ cord (mounting screws included).</div>	400329.CC.LL

7310 Innovation Blvd., Suite 104, Fort Wayne, IN 46818 | P: (800) 829-3101 | F: (260) 357-4293 | Dekko.com

14

SPECIFICATION INSTRUCTIONS

TO ORDER PLEASE SPECIFY THE FOLLOWING FOR INTERACT AND INTERFACE PRODUCTS

Step 1:	Step 2:
Base Model # (Part Number)	Color Options (CC)

**EXAMPLE**

4 0 0 2 7 2 . 0 1 . 0 4 . 0 6

Base Model: PURL  
Finish Option: Black/Black  
Cord Length: 6'

Code: Painted Metal

.25	Silver
.04	Black
.VW	White
.28	Bronze
.31	Latte
.34	Carbon
.53	Brushed Aluminum
.52	Brushed Stainless

Step 3:
Cord Options (LL above)

INFEED CORD OPTIONSG

Length Code	XX PURL	YY NEMA
.01	10'	6'
.02	2'	6'
.03	3'	6'
.04	10'	9'
.05	2'	9'
.06	3'	9'
.07	10'	10'
.08	2'	10'
.09	3'	10'

"YY"  
NEMA POWER  
CORD LENGTH:  
1 FT MIN.  
24 FT MAX.

"XX"  
PURL JUMPER  
CORD LENGTH:  
1 FT MIN.  
24 FT MAX.

IN-LINE CORD OPTIONS

Length Code	XX JUMPER	XX PURL
.01	2'	6'
.02	3'	6'
.03	2'	9'
.04	3'	9'
.05	2'	10'
.06	3'	10'
.07	2'	12'
.08	3'	12'
.09	2'	1'

"XX"  
JUMPER CORD LENGTH:  
1 FT MIN.  
24 FT MAX.

"YY"  
PURL CORD LENGTH:  
1 FT MIN.  
24 FT MAX.

POWER UNIT & STRAIGHT JUMPERS

Cord Length Code	Length
.01	1'
.02	2'
.03	3'
.04	4'
.05	5'
.06	6'

## INTERACT PRODUCTS

### INTERACT G2 - 1 POWER

1 Tamper Resistant AC 15 Amp Power Outlet, 1 USB-A 2.4 Amp Charging Port & 1 60- Watt USB-C Power Delivery Charging Port (mounting brackets included), 2 RJ knockout, 1 telecom plate knockout, surface mounted, with Purl™ cord

400389.01.CC.LL

### INTERACT G2 UT - 1 POWER

1 Tamper Resistant AC 15 Amp Power Outlet, 1 USB-A 2.4 Amp Charging Port & 1 60- Watt USB-C Power Delivery Charging Port, 2 data knockout, under mounted, with Purl™ cord

400390.01.CC.LL

### INTERACT G2 - 2 POWER

2 Tamper Resistant AC 15 Amp Power Outlets , 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting brackets included), 2 data knockouts, 1 telecom plate knockout, surface mounted, with Purl™ cord

400386.01.CC.LL

### INTERACT G2 UT- 2 POWER

2 Tamper Resistant AC 15 Amp Power Outlets , 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting screws included), 2 RJ data knockouts, 1 telecom plate knockout, under mounted, with Purl™ cord

400388.01.CC.LL

### INTERACT IV G2 - 4 POWER

4 Tamper Resistant AC 15 Amp Power Outlets , 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting brackets included), 1 convenience outlet, surface mounted with Purl™ cord

400385.01.CC.LL

### INTERACT IV G2 UT - 4 POWER

4 Tamper Resistant AC 15 Amp Power Outlets , 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port , 1 convenience outlet, under mounted with Purl™ cord

400387.01.CC.LL

## INTERFACE PRODUCTS

### INTERFACE G2 - 4 POWER

4 Tamper Resistant AC 15 Amp Power Outlet, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port (mounting brackets included), 3 telecom plate knockouts, surface mounted, with Purl™ cord

400391.01.CC.LL

### INTERACT G2 UT- 4 POWER

4 Tamper Resistant AC 15 Amp Power Outlet, 1 USB-A 2.4 Amp Charging Port & 1 60-Watt USB-C Power Delivery Charging Port, 3 telecom plate knockouts, under mounted, with Purl™ cord

400392.01.CC.LL



SPECIFICATION INSTRUCTIONS

TO ORDER PLEASE SPECIFY THE FOLLOWING FOR OASIS AND OASIS MINI PRODUCTS

Step 1:	Step 2:
Base Model # (Part Number)	Color Options (CC)

**EXAMPLE**

400372.01.04.06

Base Model: PURL  
Finish Option: Black/Black  
Cord Length: 6'

Code:	Painted Metal
.27	Silver
.04	Black
.VW	White
.28	Bronze
.31	Latte
.34	Carbon
.01	Brushed Aluminum
.19	Brushed Stainless


Step 3:
Cord Options (LL above)

INFEED CORD OPTIONS

Length Code	XX PURL	YY NEMA
.01	10'	6'
.02	2'	6'
.03	3'	6'
.04	10'	9'
.05	2'	9'
.06	3'	9'
.07	10'	10'
.08	2'	10'
.09	3'	10'

"YY"  
NEMA POWER  
CORD LENGTH:  
1 FT MIN.  
24 FT MAX.

"XX"  
PURL JUMPER  
CORD LENGTH:  
1 FT MIN.  
24 FT MAX.



POWER UNIT & STRAIGHT JUMPERS

Cord Length Code	Length
.01	1'
.02	2'
.03	3'
.04	4'
.05	5'
.06	6'

**OASIS PRODUCTS****IN-SURFACE****UNDER MOUNT****OASIS - 8 POWER**

8 Tamper Resistant AC 15 Amp Power Outlets, 6 RJ knockouts, in-surface mounted or under mount, with Purl™ cord

400372.01.CC.LL

400373.01.CC.LL

**OASIS - 12 POWER**

12 Tamper Resistant AC 15 Amp Power Outlets, 4 RJ knockouts, in-surface mounted or under mount, with Purl™ cord

400372.02.CC.LL

400373.02.CC.LL

**OASIS - 6 POWER, USB**

6 Tamper Resistant AC 15 Amp Power Outlets, 6 USB-A 2.4 Amp Charging Ports & 6 60-Watt USB-C Power Delivery Charging Ports, 2 RJ knockouts, in-surface mounted or under mount, with Purl™ cord

400372.05.CC.LL

400373.05.CC.LL

**OASIS - 10 POWER, USB**

10 Tamper Resistant AC 15 Amp Power Outlets, 4 USB-A 2.4 Amp Charging Ports & 4 60-Watt USB-C Power Delivery Charging Ports, 2 RJ knockouts, in-surface mounted or under mount, with Purl™ cord

400372.04.CC.LL

400373.04.CC.LL

**OASIS - 12 POWER, USB**

10 Tamper Resistant AC 15 Amp Power Outlets, 4 USB-A 2.4 Amp Charging Ports & 4 60-Watt USB-C Power Delivery Charging Ports, 2 RJ knockouts, in-surface mounted or under mount, with Purl™ cord

400372.03.CC.LL

400373.03.CC.LL

**OASIS MINI PRODUCTS****IN-SURFACE****UNDER MOUNT****OASIS MINI - 4 POWER**

4 Tamper Resistant AC 15 Amp Power Outlets, 3 RJ knockouts, in-surface mounted or under mount, with Purl™ cord

400374.01.CC.LL

400375.01.CC.LL

**OASIS MINI - 6 POWER**

6 Tamper Resistant AC 15 Amp Power Outlets, 2 RJ knockouts, in-surface mounted or under mount, with Purl™ cord

400374.02.CC.LL

400375.02.CC.LL

**OASIS MINI - 3 POWER, USB**

3 Tamper Resistant AC 15 Amp Power Outlets, 3 USB-A 2.4 Amp Charging Ports & 3 60-Watt USB-C Power Delivery Charging Ports, 1 RJ knockouts, in-surface mounted or under mount, with Purl™ cord

400374.05.CC.LL

400375.05.CC.LL

**OASIS MINI - 5 POWER, USB**

5 Tamper Resistant AC 15 Amp Power Outlets, 2 USB-A 2.4 Amp Charging Ports & 2 60-Watt USB-C Power Delivery Charging Ports, 1 RJ knockouts, in-surface mounted or under mount, with Purl™ cord

400374.04.CC.LL

400375.04.CC.LL

**OASIS MINI - 6 POWER, USB**

6 Tamper Resistant AC 15 Amp Power Outlets, 1 USB-A 2.4 Amp Charging Ports & 1 60-Watt USB-C Power Delivery Charging Ports, 1 RJ knockouts, in-surface mounted or under mount, with Purl™ cord

400374.03.CC.LL

400375.03.CC.LL