REV. 08242026

DEKKO POWER

4|2™ SYSTEM



THE NEXT GENERATION OF OFFICE POWER

Introducing 4|2™ - A highly versatile and efficient next generation electrical infrastructure designed to meet the demands of modern office environments. Its innovative design offers distinct benefits for manufacturers, office planners, and end-users by delivering an ideal balance of functionality, cost-effectiveness, and adaptability.

APPLICATIONS

Partitions

Benching

Workstations

Beams

Collaborative Spaces



TECHNICAL SPECIFICATIONS

SYSTEM POWER:

4 Wires, 2 Circuits

20 Amp System Rating - 3 ph (120/208V), 1 ph (120/240V)

2-1-1 Wiring Order - Shared Neutral

12 Gauge Wires

UL 1286 recognized and 183 Listed for US and Canada

RECEPTACLES:

15 Amp

Tamper Resistant ("TR")

1.0" Thick / Tall

Single Sided or Double-Sided W/ Staggered Connection

Spring or Screw mount options

MOUNTING OPTIONS

Screw Mount

Spring Mount

*Custom

**Contact Customer Service regarding custom mounting capabilities*

POWER INFEED OPTIONS

*Hardwired - 3/8" extra flex conduit (24' max)

*Hardwired - liquid tight to 3/8" extra flex conduit

*Corded infeed
(20 Amp or 15Amp NEMA)

© 2025 GROUP DEKKO, INC. | All Rights Reserved | 7310 Innovation Blvd., Suite 104, Fort Wayne, IN 46818 | P: (800)-829-3101 | F: (260)-357-4293 | **dekko.com**

Dekko and associated product names are trademarks of Group Dekko, Inc. All other trademarks are the property of their respective owners. Product specifications and availability are subject to change without notice. Unauthorized reproduction, distribution, or use of this document, in whole or in part, is strictly prohibited.

DEKKO


FINISHING OPTIONS

RECEPTACLE COLORS

- Grey
- Black
- White

FINISH AREA

- Receptacle



SYSTEM DETAILS

DIMENSIONS

COMPONENT	WIDTH (Y)	DEPTH (Z)	LENGTH (X)
SPRING MOUNT RECEPTACLE	1.70″	1.0″	4.5″
SCREW MOUNT RECEPTACLE	1.70″ 2.0″ On Center to Screw Holes	1.0″	4.5″
INFEED	1.70″	0.7″	VARIABLE
20 AMP NEMA INFEED	1.70″	0.5″	24″ MAX
15 AMP NEMA INFEED	1.70″	0.5″	72″ MAX
JUMPER (CONDUIT)	1.70″	0.7″	VARIABLE
BRACKET	1.76″	0.7″	4.52″
SPLITTER	1.80″	1.61″	2.50″
JBOX INFEED	1.70″	0.7″	VARIABLE
LIQUID TIGHT INFEED	1.70″	0.7″	VARIABLE
DAISYLINK SYSTEM JUMPER	1.70″	0.9″	VARIABLE
MESH JUMPER	1.70″	0.5″	24″ MAX EXPOSED
8-10 SYSTEM JUMPER	1.90″	0.9″	VARIABLE
8W-PAWS SYSTEM JUMPER	2.0″	0.7″	VARIABLE


CONFIGURATION

4 WIRES | 2 CIRCUITS


SHARED NEUTRAL
2-1-1


LINE (12GA)	2
NEUTRAL (12GA)	1
GROUND (12GA)	1
UTILITY CIRCUITS	2
DECICATED CIRCUITS	0
MAX RECEPTACLES PER 20A CIRCUIT	13
MAX RECEPTACLES PER 20A INFEED	26

Receptacles: Back-to-Back Duplex Receptacles via offset connection - No Splitter or I-Connector Required (see example below)





SPRING MOUNT RECEPTACLES






SCREW MOUNT RECEPTACLES

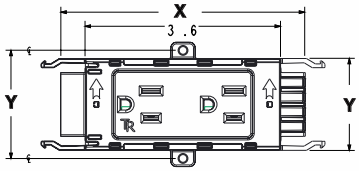





JUMPER




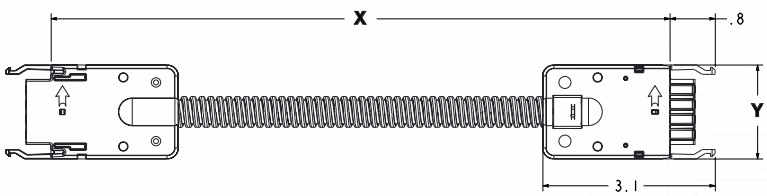

BRACKET





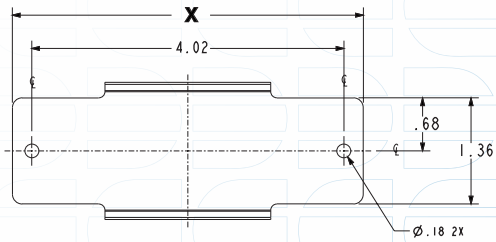


© 2025 GROUP DEKKO, INC. | All Rights Reserved | 7310 Innovation Blvd., Suite 104, Fort Wayne, IN 46818 | P: (800)-829-3101 | F: (260)-357-4293 | **dekko.com**


Dekko and associated product names are trademarks of Group Dekko, Inc. All other trademarks are the property of their respective owners. Product specifications and availability are subject to change without notice. Unauthorized reproduction, distribution, or use of this document, in whole or in part, is strictly prohibited.

SYSTEM DETAILS (CONT.)


INFEED

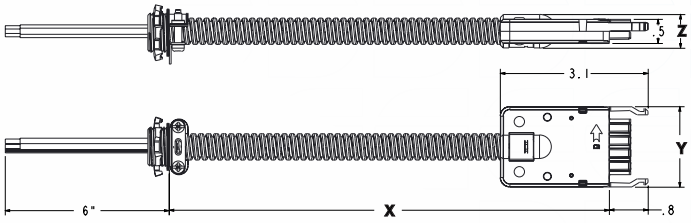


JBOX INFEED

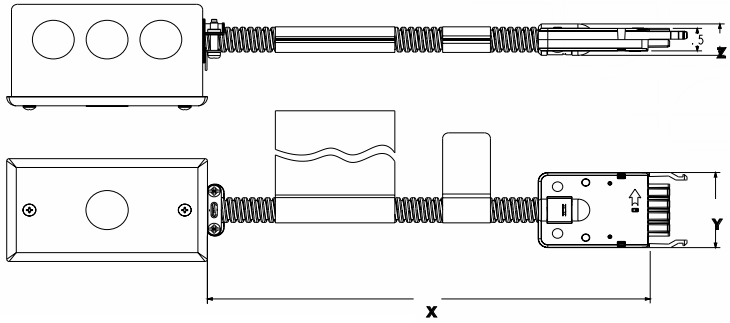


MESH JUMPER

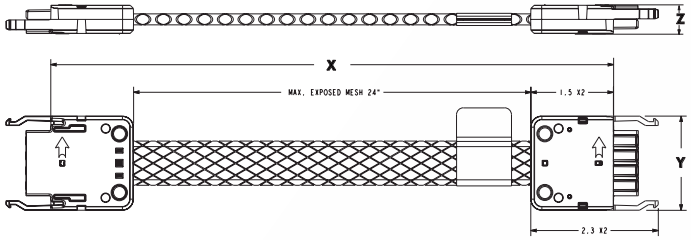


8-10 SYSTEM ADAPTER

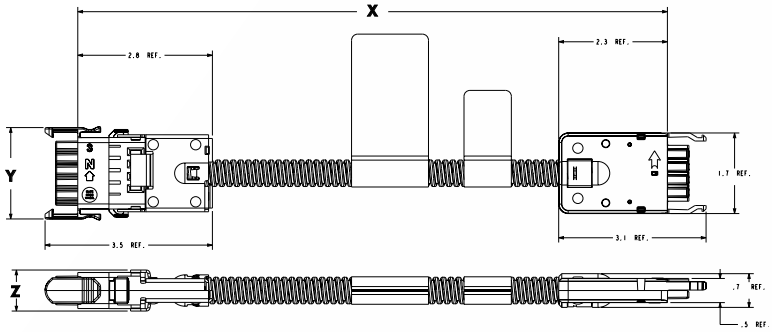


8W-PAWS SYSTEM ADAPTER

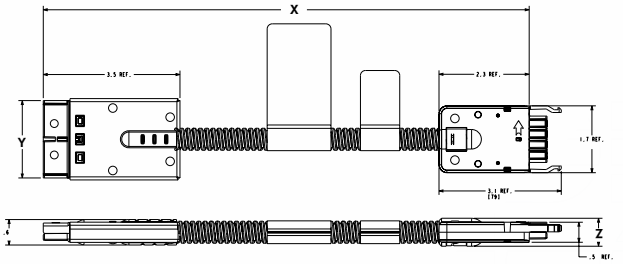


LIQUID TIGHT INFEED

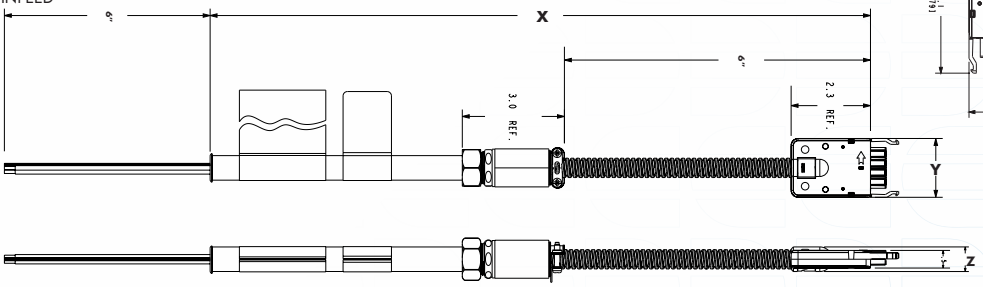


DAISYLINK SYSTEM ADAPTER

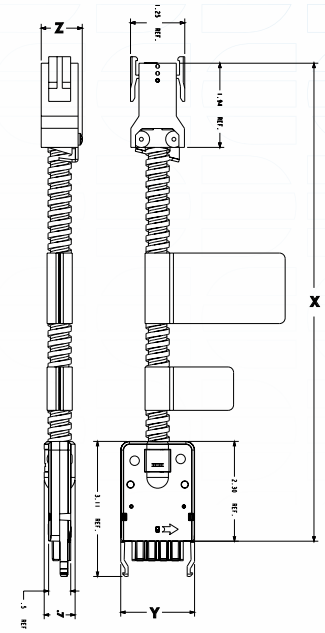


4-WAY SPLITTER



20 AMP NEMA INFEED

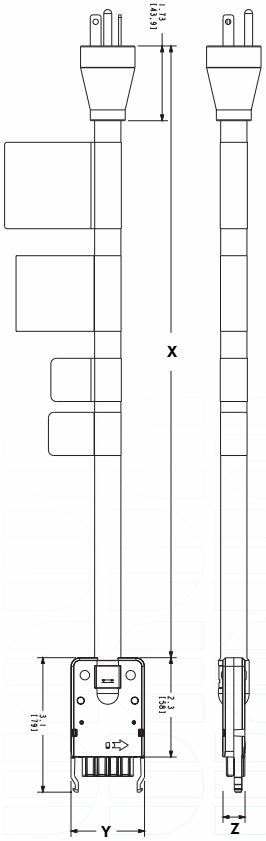

15 AMP NEMA INFEED

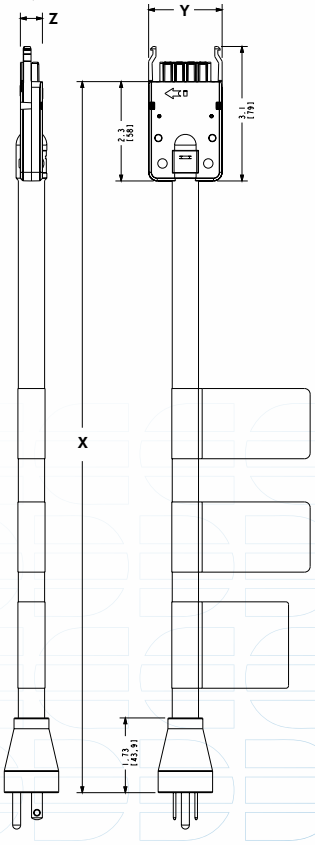

© 2025 GROUP DEKKO, INC. | All Rights Reserved | 7310 Innovation Blvd., Suite 104, Fort Wayne, IN 46818 | P: (800)-829-3101 | F: (260)-357-4293 | **dekko.com**

Dekko and associated product names are trademarks of Group Dekko, Inc. All other trademarks are the property of their respective owners. Product specifications and availability are subject to change without notice. Unauthorized reproduction, distribution, or use of this document, in whole or in part, is strictly prohibited.

PRODUCT SPECIFICATION

Specify your product:	Step 1. Select base	
PRODUCT TYPE	**BASE PART NUMBER**	
INFEED	**UL 183**	**UL 1286 [2]**
3/8" CONDUIT, EXTRA FLEX	595000.01	590000.1
J BOX TO 3/8" CONDUIT, EXTRA FLEX		590010.1
LIQUID TIGHT TO 3/8" CONDUIT, EXTRA FLEX	595027.01	590027.1
20 AMP CORDED INFEED - STRAIGHT NEMA PLUG (USA)		590034.1
20 AMP CORDED INFEED - 90° NEMA PLUG (USA)		590034.2
15 AMP CORDED INFEED - STRAIGHT NEMA PLUG (CANADA)		590036.1
15 AMP CORDED INFEED - 90° NEMA PLUG (CANADA)		590036.2
RECEPTACLES		
SPRING MOUNT	595002	590002
SCREW MOUNT	595003	590003
JUMPER		
3/8" CONDUIT, EXTRA FLEX	595001.01	590001.1
MESH JUMPER		590007.1
SYSTEM ADAPTERS		
8W PAWS		
8W PAWS, 3/8" CONDUIT, EXTRA FLEX		590017.1
8W PAWS, MESH		590021.1
8-10		
8-10, 3/8" CONDUIT, EXTRA FLEX		590016.1
8-10, MESH, SHARED NEUTRAL		590020.1
DAILYLINK		
DAISYLINK, 3/8" CONDUIT, EXTRA FLEX		590022.1
ACCESSORIES		
4-WAY SPLITTER	595005.1.1	590005.1.1
DUST CAP	185372.01	
SPRING MOUNT BRACKET KIT [1]		185253-1

[1] *Bracket Kit includes mounting hardware.*

[2] *UL1286 recognized components are to be listed with the intended furniture application.*

Step 2. Select cord/whip length or circuit [1]

CIRCUITS - RECEPTACLES ONLY

.1000	Circuit 1
.2000	Circuit 2

INFEED LENGTH [2]

Specify length below.

.005	6 inch
.01	12 inch
.02	24 inch
.03	36 inch
.04	48 inch
.05	60 inch
.06	72 inch
.09	108 inch
.10	120 inch
.12	144 inch
.18	216 inch
.24	288 inch

JUMPER/ADAPTER LENGTH

.005	6 inch
.01	12 inch
.02	24 inch
.03	36 inch
.04	48 inch
.05	60 inch
.06	72 inch
.09	108 inch
.10	120 inch
.12	144 inch
.18	216 inch
.24	288 inch

[1] *Cord/Whip Length not applicable for Bracket, Splitter or UL 1286 models. UL 1286 models specified in 1" increments. Contact Customer Service/Sales for order specification.*

[2] *6 inch whip length standard. Liquid Tight Infeed minimum length is 36"*

Step 3. Select color [1]

RECEPTACLES

.04	Black Receptacles
.35	White Receptacles
.55	Gray Receptacles

[1] *Color Options not applicable for Infeed, Jumpers, Bracket, and Splitter*

Step 4. Combine for product

BASE + CORD/CIRCUIT + COLOR = ######.##.##.## *EXAMPLE: 595003 + .2000 + .35 = **595003.2000.35***

© 2025 GROUP DEKKO, INC. | All Rights Reserved | 7310 Innovation Blvd., Suite 104, Fort Wayne, IN 46818 | P: (800)-829-3101 | F: (260)-357-4293 | **dekko.com**

Dekko and associated product names are trademarks of Group Dekko, Inc. All other trademarks are the property of their respective owners. Product specifications and availability are subject to change without notice. Unauthorized reproduction, distribution, or use of this document, in whole or in part, is strictly prohibited.