




PURL™

SMARTER POWER FOR MODERN SPACES

PURL™ redefines how power is delivered across dynamic environments—like training rooms, conference spaces, collaborative workstations, and height-adjustable tables. As the first UL-Listed modular linking system of its kind, PURL connects up to nine compatible power units through a single outlet—eliminating outlet clutter, simplifying installation, and enabling cleaner layouts.

PURL is the system that makes power accessibility simple and scalable.

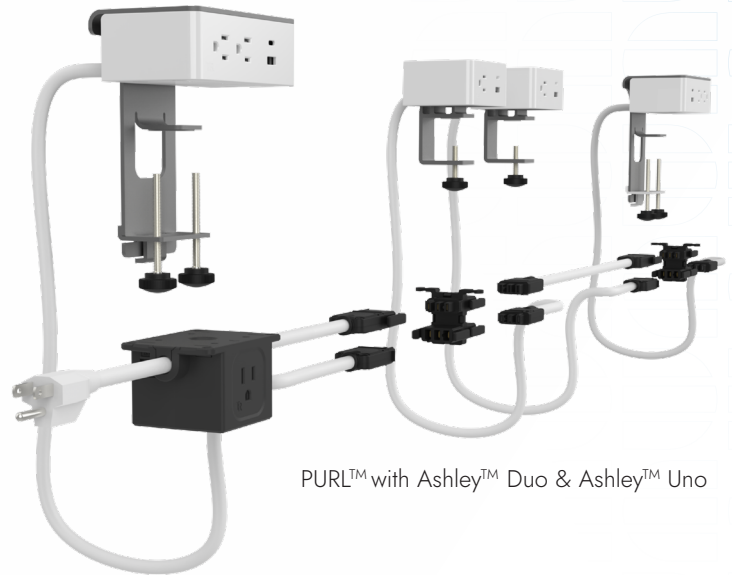

PURL™ with Ashley™ Duo & Ashley™ Uno

APPLICATIONS

Training Tables
Height Adjustable Tables
Conference Tables
Benching & Modular Desking

TECHNICAL SPECIFICATIONS

Single Circuit
15 Amp Over Current Protection
Non-sequential
Single infeed: End or center
Layouts capabilities: single sided or back-to-back
Connect up to 9 units, with up to 6 receptacles
All receptacles are Tamper Resistant
Straight & Coiled Jumpers¹
Mounting hardware included
UL 962A SD Listed

Compatible Power Units: Ashley, Electrolite, Edge, Interface, Interact, Oasis & Oasis Mini

Compatible Unit Mounting: On-Surface (Clamp-on), In-Surface/Bezel, Under Mount & Inline

¹ Unlimited Straight Jumpers support continuous runs of up to 31 ft from the NEMA plug (power infeed) to the end of the system, or up to 31 ft in any direction for center-fed systems. Supports up to 3 coil jumpers within a single system.



MOUNTING OPTIONS

Under Mount

POWER INFEEED OPTIONS

PURL

FINISHING OPTIONS

CORD COLORS


- Black
- White

FINISH AREA


- Body/Connectors*
- Cord

*Infeed Outlet and Connectors remain black regardless of cord color.

PURL™ Infeed Finish Area

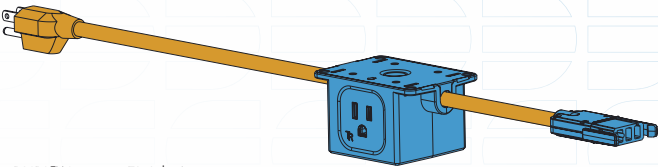

PURL™ Jumper Finish Area

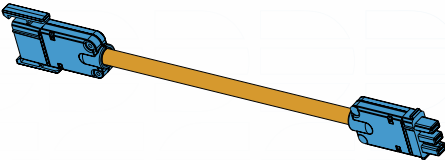

DIMENSIONS


COMPONENT	DESCRIPTION/CONFIGURATION	UNIT WIDTH (Y)	UNIT DEPTH (Z)	UNIT LENGTH (X1 OR XX)	UNIT LENGTH (YY)
INFEED ¹	POWER INFEED WITH TAMPER RESISTANT OUTLET	2.50"	2.00"	1' MIN - 24' MAX	1' MIN - 24' MAX
STRAIGHT JUMPER ²	PURL TO PURL STRAIGHT JUMPER	0.48"	1.082"	1' MIN - 20' MAX	
COIL JUMPER ³	PURL TO PURL COIL JUMPER	0.48"	1.082"	2' (98" extended)	
SPLITTER	1 INPUT + 3 OUTPUTS	2.29"	1.77"	2.54"	

¹ Infeed lengths available up to 25 feet.


² Unlimited Straight Jumpers support continuous system runs up to 31 ft from the NEMA plug, or 31 ft in any direction for center-fed systems..

³ Supports up to 3 coil jumpers within a single system.


PURL™ Infeed




PURL™ Jumper (Straight)

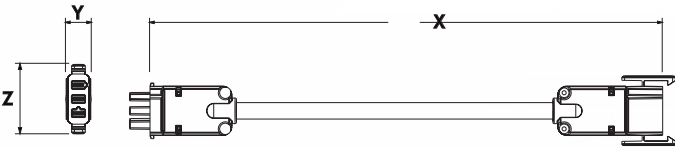

PURL™ Jumper (Coil)



PURL™ Splitter

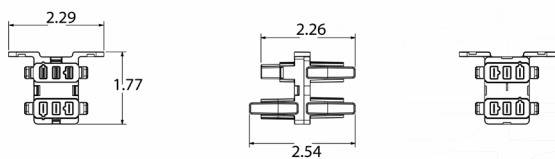

COMPATIBILITY & CONFIGURATIONS

PURL COMPATIBLE POWER UNITS & SPECIFICATIONS

Power Units*: Ashley, Electrolite, Edge, Interact, Oasis Series & Inline offerings

Maximum Cord Length: 1' to 6' for all units

Mounting: Clamp, Under & In-Surface (Bezel)

*Model compatibility varies. See full list under Product Specification.

Ashley™:



Electrolite™:



Edge™:




Interact™:



Interface™:






Oasis™ & Oasis™ Mini:



FEED CONFIGURATIONS

Single Sided or Back to Back / End or Center Infeed

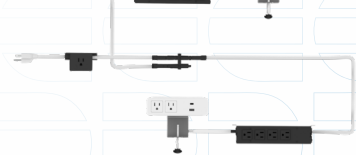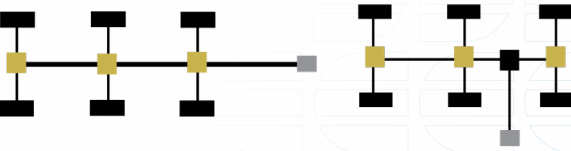

Example:
Back to Back Infeed Configuration
with Electrolite Inline

PRODUCT SPECIFICATION

[illegible]

Step 4. Combine for product

BASE + COLOR + CORD = #####.##.##.##

EXAMPLE: 400150.01 + .57 + .05 = 400150.01.57.05

PRODUCT SPECIFICATION

Specify your product:	Step 1. Select base part number	Step 2. Select color	Step 3. Select cord length or circuit
COMPATIBLE POWER UNITS (CONT.)	BASE PART NUMBER	POWER UNIT COLOR PART NUMBER	POWER UNIT CORD LENGTHS
INTERACT		INTERACT & INTERFACE	
2 POWER + 1 CONVENIENCE OUTLET + 1 USB A & C + 2 DATA KNOCKOUTS + 1 TELECOM CUTOUT	400386.01	USB MODEL COLOR CODES	.01 12"
4 POWER + 1 CONVENIENCE OUTLET + 1 USB A & C + 2 DATA KNOCKOUTS	400385.01	.27 Silver/Grey Receptacles/Black Cord	.02 24"
1 POWER + 1 CONVENIENCE OUTLET + 1 USB A & C + 2 DATA KNOCKOUTS + TELECOM CUTOUT	400389.01	.25 Silver/Black Receptacles/Black Cord	.03 36"
INTERFACE		.04 Black (Textured)/Black Receptacles/Black Cord	.04 48"
4 POWER + 1 CONVENIENCE OUTLET + 1 USB A & C + 3 TELECOM CUTOUTS	400391.01	.VW White/White Receptacles/White Cord	.05 60"
OASIS		.28 Bronze/Black Receptacles/Black Cord	.06 72"
8 POWER + 6 TELECOM CUTOUTS	400372.01	.31 Latte/Black Receptacles/Black Cord	
12 POWER + 4 TELECOM CUTOUTS	400372.02	.34 Carbon/Black Receptacles/Black Cord	
12 POWER + 2 USB A & C + 2 TELECOM CUTOUTS	400372.03	.53 Brushed Aluminum/Black Receptacles/Black Cord	
10 POWER + 4 USB A & C + 2 TELECOM CUTOUTS	400372.04	.52 Brushed Stainless Steel/Black Receptacles/Black Cord	
6 POWER + 6 USB A & C + 2 TELECOM CUTOUTS	400372.05	POWER ONLY MODEL COLOR CODES	
OASIS MINI		-B Black Faceplate/Black Receptacles/Black Cord	
6 POWER + 2 TELECOM CUTOUTS	400374.01	-W White Faceplate/White Receptacles/Black Cord	
4 POWER + 3 TELECOM CUTOUTS	400374.02	-S Silver Faceplate/Black Receptacles/Black Cord	
6 POWER + 1 USB A & C + 1 TELECOM CUTOUTS	400374.05	-Z Bronze Faceplate/Black Receptacles/Black Cord	
5 POWER + 2 USB A & C + 1 TELECOM CUTOUTS	400374.04	-L Latte Faceplate/White Receptacles/Black Cord	
3 POWER + 3 USB A & C + 1 TELECOM CUTOUTS	400374.03	-C Carbon Faceplate/Black Receptacles/Black Cord	
		-AL Brushed Aluminum/Black Receptacles/Black Cord	
		-SS Brushed Stainless Steel/Black Receptacles/Black Cord	
		OASIS & OASIS MINI	
		.27 Silver/Grey Receptacles/Black Cord	
		.04 Black (Textured)/Black Receptacles/Black Cord	
		.38 White/White Receptacles/ Black Cord	
		.28 Bronze/Black Receptacles/Black Cord	
		.31 Latte/Black Receptacles/Black Cord	
		.34 Carbon/Black Receptacles/Black Cord	
		.57 Brushed Aluminum /Grey Receptacles/Black Cord	
		.56 Black Brushed Aluminum/Black Receptacles/Black Cord	
Step 4. Combine for product			
BASE + COLOR + CORD = #####.##.##.## EXAMPLE: 400374.03 + .31 + .02 = 400374.03.31.02			