



POWER ISLAND®



POWER THAT MOVES WITH YOU



HEIGHT-ADJUSTABLE TABLE SOLUTIONS

Power Island® seamlessly brings power to height-adjustable work surfaces, no table cut outs required. Power Island® offers access to power, USB charging, and integrated cord management from underneath the work surface - at any height. Compatible with the 8 Wire, 4 Circuit DL DaisyLink™ Plug and Play electrical system, multiple units link together from one power infeed. Our unique "No Particular Order" feature allows furniture to be reconfigured in any space without the need to follow any particular order or sequence. Power Island® Quick Kits provide all necessary components for popular table sizes making specifying simple.



FEATURES:

Applications

Under
Height Adjustable Tables

Standard Finishes

- Silver Pearl
- Black
- Gloss White




Specifications


- 6 - 15A, 120VAC Power Receptacles
 - 120V Controlled Circuit Options Available
 - 2 - 5A/25W, 5VDC USB Charging Ports
 - 1 Telecom Plate Knockout - Fully Customizable (*Purchased Separately*)
 - Quick Kit Components: Power Island® Power Box, Cable Kit, and Power Infeed (*All Sold Separately*)
- Cable Kits Include: 2 - 8 Wire 4 Circuit DL DaisyLink Female/Female Cables, 2 Mounting Brackets & Mounting Screws, 2 Clamps, & 1 Loop Cable
 - Circuit 1, 2 & 3 Options Available
 - ETL Listed for US and Canada
 - Controlled Circuit Models Comply with Ashrae 90.1 & Title 24 Energy Efficiency Regulations

Dimensions

• Power Island® Standard Dimensions: 16.92" x 6" x 4"

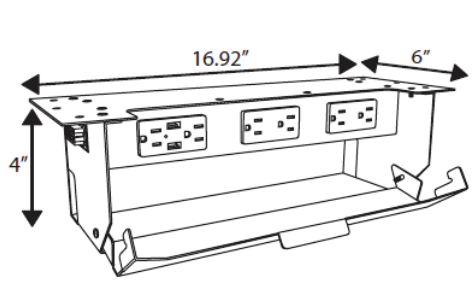

Power Island



Cable Kit



Power Infeed
84DL20AP1 Shown

DESCRIPTION

Quick Kit - Step 1: Select Unit

- (6 Receptacles) Circuit 1
- (3 Receptacles) Circuit 1, (3 receptacles) Circuit 2
- (3 Receptacles) Circuit 1, (3 receptacles) Circuit 3
- (3 Receptacles) Circuit 1, (3 receptacles) Circuit 4
- (3 Receptacles) Circuit 2, (3 receptacles) Circuit 3
- (3 Receptacles) Circuit 2, (3 receptacles) Circuit 4
- (3 Receptacles) Circuit 3, (3 receptacles) Circuit 4
- (4 Receptacles) Circuit 1, (2 receptacles) Circuit 3 IG
- (4 Receptacles) Circuit 1, (2 receptacles) Circuit 4 IG
- (4 Receptacles) Circuit 2, (2 receptacles) Circuit 3 IG
- (4 Receptacles) Circuit 2, (2 receptacles) Circuit 4 IG

FINISH

- Black
- Silver Pearl
- Gloss White

PART NUMBER

- PI-84-11-U-KO-S
- PI-84-12-U-KO-S
- PI-84-13-U-KO-S
- PI-84-14-U-KO-S
- PI-84-23-U-KO-S
- PI-84-24-U-KO-S
- PI-84-34-U-KO-S
- PI-84-3IG1-UKOS
- PI-84-4IG1-UKOS
- PI-84-3IG2-UKOS
- PI-84-4IG2-UKOS

Step 1: Select Unit - Controlled Circuit Options

- 3 Circuit 1 Controlled, 3 Circuit 2
- 3 Circuit 1 Controlled, 3 Circuit 3
- 3 Circuit 1 Controlled, 3 Circuit 4
- 3 Circuit 1, 3 Circuit 2 Controlled
- 3 Circuit 2 Controlled, 3 Circuit 3
- 3 Circuit 2 Controlled, 3 Circuit 4

- Black
- Silver Pearl
- Gloss White

- PI-84-21CC-UKOS*
- PI-84-31CC-UKOS*
- PI-84-41CC-UKOS*
- PI-84-12CC-UKOS*
- PI-84-32CC-UKOS*
- PI-84-42CC-UKOS*

*Replace S for Silver Pearl in Part Number for GW for Gloss White or B for Black.

Step 2: Cable Kit (Based on Table Length)

- 42" Table Kit: 2 84DL FM-14" cables, 2 Mounting Brackets, Mounting Screws, 2 U Clamps, 42" Loop Cable with Black Mesh
- 48" Table Kit: 2 84DL FM-17" cables, 2 Mounting Brackets, Mounting Screws, 2 U Clamps, 42" Loop Cable with Black Mesh
- 54" Table Kit: 2 84DL FM-20" cables, 2 Mounting Brackets, Mounting Screws, 2 U Clamps, 42" Loop Cable with Black Mesh
- 60" Table Kit: 2 84DL FM-23" cables, 2 Mounting Brackets, Mounting Screws, 2 U Clamps, 42" Loop Cable with Black Mesh
- 66" Table Kit: 2 84DL FM-26" cables, 2 Mounting Brackets, Mounting Screws, 2 U Clamps, 42" Loop Cable with Black Mesh
- 72" Table Kit: 2 84DL FM-29" cables, 2 Mounting Brackets, Mounting Screws, 2 U Clamps, 42" Loop Cable with Black Mesh
- 84" Table Kit: 2 84DL FM-35" cables, 2 Mounting Brackets, Mounting Screws, 2 U Clamps, 42" Loop Cable with Black Mesh

N/A

- PI-84DL-42K
- PI-84DL-48K
- PI-84DL-54K
- PI-84DL-60K
- PI-84DL-66K
- PI-84DL-72K
- PI-84DL-84K

Step 3: Power Infeed

- DaisyLink 8 Wire, 4 Circuit Hardwire Power Infeed with Black Mesh
- DaisyLink 8 Wire, 4 Circuit 20 Amp Single Circuit Starter, 48" cable 24" corded plug, Black Mesh

- Black
- Black

- 84DL SB2-XX"B
- 84DL 20AP1-72"B

*XX represents length