



VILLA™ AV SERIES

VILLA™ AV SERIES



AUDIO VISUAL ESSENTIALS

DESKTOP ACCESS TO A/V POWER

Look no further for your audio-visual needs. Villa™ AV has the essentials built straight into the housing, so the assembly work is done for you. Plug-in and let the videos roll. Villa AV includes an RJ45 Cat 6 Data Inline, mini stereo jack, and a VGA port. Flexible mounting options allow the unit to be mounted to the underside of the work surface with a drop-in grommet lid. Compatible with our DaisyLink™ system, link multiple units together from one infeed and skip the hassle and mess of cord clutter.

FEATURES:

Applications

Bezel / In-Surface

Standard Finishes

Silver Pearl	
Black	

Flush Style Grommet Finishes

Brushed Aluminum	
Stainless Steel	
Silver Pearl	
Black	
Gloss White	

Lift Style Grommet Finishes

Silver Pearl	
Black	
Gloss White	




Specifications


- 2 - 15A, 120V AC Power Receptacles
- 1 Convenience Outlet
- 1 VGA with 60" Male Pigtail (Includes Female/Female Gender Changer)
- 1 RJ45 Cat 6 Data Inline
- 1 Mini Stereo
- Corded and DaisyLink Options Available
- Standard Cord Length: 36", 72" or 108"
- DaisyLink Configurations Compatible with the 4 Wire 2 Circuit Starter and Interconnecting Cables & Accessories
- 4 Cable Clamps & Mounting Screws Included for Installation
- Optional Lift or Flush Grommet Accessory (See Grommet Brochure for More Details.)
- Recommended Table Thickness for Villa™ Grommet: 1" Min.
- Recommended Table Cut Out for Villa™ Grommet: 3" x 5.25"
- UL Listed for US and Canada

Dimensions

- Villa™ AV Standard Dimensions: 3" x 8.62" x 1.80"
- Villa Grommet (Lift and Flush) Standard Dimensions: 3.39" x 5.68"

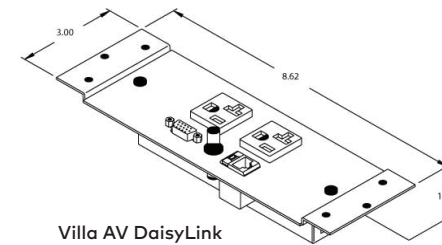

Villa AV DaisyLink

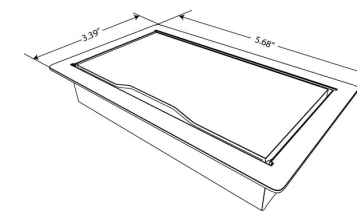

Lift Lid



Flush Lid (Open)



DESCRIPTION	FINISH	PART NUMBER
-------------	--------	-------------

Villa™ AV - Corded

<ul style="list-style-type: none"> 2 Power, 1 Convenience Outlet, 1 RJ45 Cat 6 data, 1 VGA with 60" male pigtail (includes female/female gender changer) and 1 Mini Stereo with 72" Cord (Used with Villa Grommet - Purchased Separately) 	Black Silver Pearl	VIL-C-V-B-72 VIL-C-V-S-72
--	-----------------------	------------------------------

Replace "72" in the listed Part Number with Appropriate Cord Length of your choice: 36", 72", or 108". Pricing is standard for these specified lengths.

NOTE: Cord lengths 144" and 180" require an additional up-charge fee. Unit comes equipped with 4 cable clamps and mounting screws.

Villa™ Grommets

<ul style="list-style-type: none"> Lift lid 	Black Silver Pearl Gloss White	VIL-GROM-L-B VIL-GROM-L-S VIL-GROM-L-GW
<ul style="list-style-type: none"> Flush lid 	Brushed Aluminum Brushed Stainless Steel Black Silver Pearl Gloss White	VIL-GROM-F-AL VIL-GROM-F-SS VIL-GROM-L-B VIL-GROM-L-S VIL-GROM-L-GW

DESCRIPTION	FINISH	PART NUMBER
-------------	--------	-------------

Villa™ AV - DaisyLink

<ul style="list-style-type: none"> 2 Power, 1 Convenience Outlet, 1 RJ45 Cat 6 data, 1 VGA with 60" male pigtail (includes female/female gender changer) and 1 Mini Stereo, Circuit 1 (Used with Villa Grommet - Purchased Separately) 	Black Silver Pearl	VIL-4-1-V-B VIL-4-1-V-S
---	-----------------------	----------------------------

Change the "1" to a "2" to specify Circuit 2. See Below for Starter and Interconnecting Cable Options.

DaisyLink Starter & Interconnecting Cable Options

<ul style="list-style-type: none"> Female/Female Interconnecting Cable 	12" -180" Cable	42-FF-Length*
<ul style="list-style-type: none"> Female/Male Interconnecting Cable 	12"-180" Cable	42FM-Length*
<ul style="list-style-type: none"> Hardwire Starter Cable 	12"-180" Cable	42SB2-Length*
<ul style="list-style-type: none"> T-Connector used to branch into different directions 	Black	Daisy-T
<ul style="list-style-type: none"> DaisyLink Nylon Black Cable Covers - Add "B" to cabling part number 	Black	Cable Covers "B"

Specify in increments of 1" Cable Lengths in Part Number. Cable Lengths Minimum of 12" - 180" Maximum.

