




VILLA™ UM - DAISYLINK

FEATURES:

Applications

Under-mount  
Training Tables  
Panel Systems

Standard Finishes

Silver Pearl   
Black   
Gloss White 




Specifications

- 2-4 - 15A, 120V AC Power Receptacles
- 2.1A/10.5W USB Charging Ports (Available on Select Models)
- Data Knockouts (Available on Select Models)
- Compatible with the 4 Wire 2 Circuit Starter and Interconnecting Cables (Purchased Separately)
- Starter & Interconnecting Cable Lengths: Minimum 12" - 180" (Specify in 1" Increments)
- Circuit 1 and 2 Options Available
- 4 Cable Clamps & Mounting Screws Included for Installation
- Recommended Table Thickness: 1" Minimum
- ETL Listed for US and Canada


Dimensions

Villa UM Dimensions Vary By Configuration


- Standard Depth: ~2.10" & Width of Units do not exceed 3.34"




Villa UM 2 USB - DaisyLink Shown

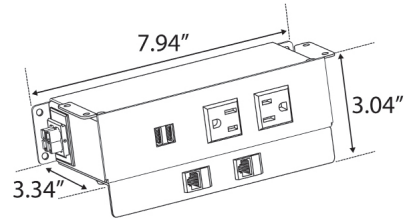

Villa UM 2 Power, 2 USB with Data Knockouts - DaisyLink Shown



Villa UM 2 Power, 2 USB - DaisyLink Shown

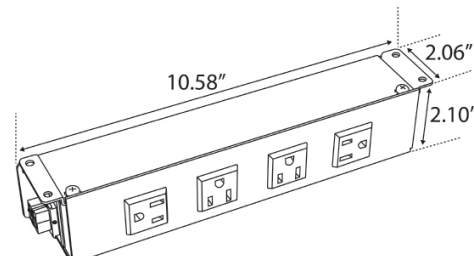

Villa UM 4 Power - DaisyLink Shown

DESCRIPTION

FINISH

PART NUMBER

Villa™ UM - DaisyLink

• Villa Under Mount, 2 Power	Black Silver Pearl	VIL-UM-41-2-B VIL-UM-41-2-S
• Villa Under Mount, 2 Power, Knockouts for 2 Data	Black Silver Pearl	VIL-UM-41-2DKOB VIL-UM-41-2DKOS
• Villa Under Mount, 2 Power, (2) 2.1 amp USB	Black Silver Pearl	VIL-UM-41-2U-B VIL-UM-41-2U-S
• Villa Under Mount, 2 Power, (2) 2.1amp USB, Knockouts for 2 Data	Black Silver Pearl	VIL-UM-412UDKOB VIL-UM-412UDKOS
• Villa Under Mount, 4 Power	Black Silver Pearl	VIL-UM-41-4-B VIL-UM-41-4-S
• Villa Under Mount, (2) 2.1 amp USB	Black Silver Pearl	VIL-UM-41-U-B VIL-UM-41-U-S

Change the "1" to a "2" to specify Circuit 2.  
See Starter and Interconnecting Cable Options Below.

Villa™ UM Data Options

• RJ45 Siemon Cat 6, female/punch down, Black	Black	RJ45-B
• HDMI keystone female/female, Black	Black	HDMI-KEY-B
• USB 2.0 Type A/A Keystone female/female, Black	Black	USB-KEY-20AA-B
• USB 2.0 Type A/A Keystone female/female, White	White	USB-KEY-20AA-W

DaisyLink Starter & Interconnecting Cable Options

• Female/Female Interconnecting Cable	12" -180" Cable	42-FF-Length*
• Female/Male Interconnecting Cable	12"-180" Cable	42FM-Length*
• Hardwire Starter Cable	12"-180" Cable	42SB2-Length*
• T-Connector used to branch into different directions	Black	Daisy-T
• DaisyLink Nylon Black Cable Covers - Add "B" to cabling part number	Black	Cable Covers "B"

Specify in increments of 1" Cable Lengths in Part Number.  
Cable Lengths Minimum of 12" - 180" Maximum.