



COVE™ SERIES DAISYLINK™ QUICK KITS



PRE-CONFIGURED POWER OPTIONS

OUTFITTED FOR YOUR SPECIFIC TABLE REQUIREMENTS.

Quick Kits were designed to make specifying easy. One order number provides all the necessary components to outfit popular table lengths. In addition, our assortment of accessories offer next-level cable management capabilities. As the name implies, installation is quick and easy, so you can reconnect and power-up devices in no time.










FEATURES:

Mounting Capabilities
 Bezel /In-Surface

Applications
 Ancillary Furniture
 Work Surfaces
 Training Tables
 Soft-Sided Seating

Standard Finishes*

- Silver 
- Black (Textured Finish) 
- White 
- Bronze 
- Latte 
- Carbon 
- Brushed Aluminium 

*Interested in our specialty finishes?
 Contact us for details.




UNIT SPECIFICATIONS:

- 15A/120V AC Spill-Resistant Receptacles
(Choice of 2 or 4 Power Configurations)
- 2.1A/5V Shared; Dual USB Charging Ports *(Optional)*
- Used with 4 Wire 2 Circuit Starter and Interconnecting Cables *(See Kit Specs & Table Chart for Details; Starter Cables Sold Separately)*
- Circuit 1 and 2 Options - Link Up-to 40 Receptacles Across 2 Circuits *(US Only)*
- Clamp and Screw Mounting Capabilities *(Screw-Mount Configurations Available Upon Request)*
- Fits Surface Thicknesses: 0.75" - 1.25"
- Optional Mounting Bracket for Surface Thicknesses Up-to 1.50"
- Table Cutout: Varies by Configuration - See Install Sheet for Details
- ETL Listed for US and Canada


KIT SPECIFICATIONS:

- Choice of a Single (1 Unit) or Double (2 Units) Kit
- Single Kit Table Sizes: 36", 42", 48", 54", 60", 66", 72", 84", 96" *(See Single Kit Table Chart for Details)*
- Double Kit Table Sizes: 60", 66", 72", 84", 96" *(See Double Kit Table Chart for Details)*
- Single Kit Includes: 1 Cove DaisyLink Unit, 1 Female/Female and 1 Female/Male Interconnecting Cables, 4 Plastic Cable Clamps and Screws
- Double Kit Includes: 2 Cove DaisyLink Units, 2 Female/Female and 1 Female/Male Interconnecting Cables, 8 Plastic Cable Clamps and Screws

SINGLE KIT COMPONENTS


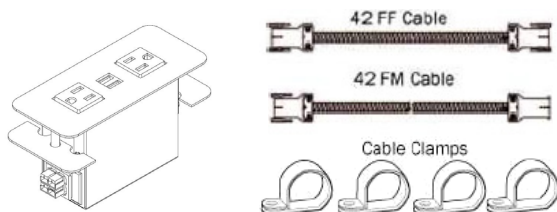


DOUBLE KIT COMPONENTS

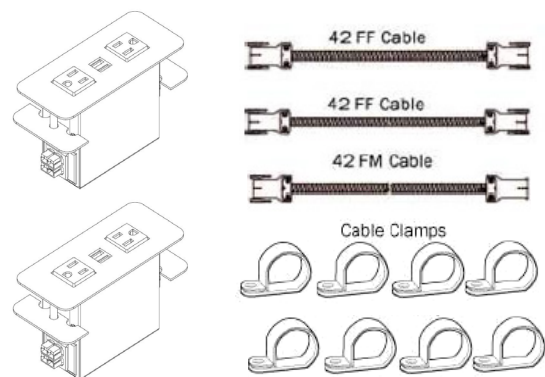

Clamp-Mount (Featured to the right) -

- **Intended Applications:** desks, benches, tables; ideal for surfaces that provide access to back of unit
- **Tool-free installation:** unit is fastened to furniture from the rear by tightening the thumbscrews

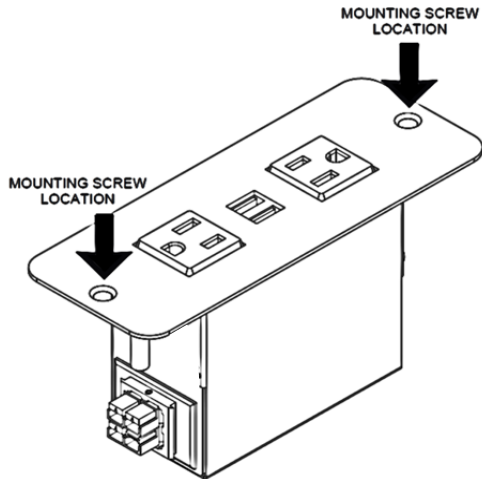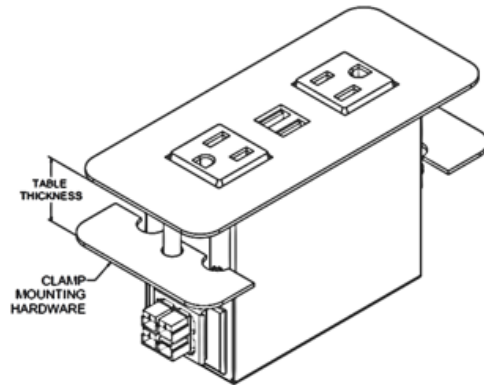


Screw-Mount (Featured to the left) -

- **Intended Applications:** soft sided seating, lounge furniture, support columns; ideal for surfaces where there is limited, or no access to back of unit
- **Installation - requires tools:** screws (not included) are installed from the front of the unit, through the faceplate, fastening the Cove™ to the furniture

CLAMP-MOUNT BRACKETS ARE NOT SHOWN IN LINE ART DIAGRAMS


NOTE - FOR ALL UNITS SHOWN BELOW:

UNIT WIDTH = 1.80"
 UNIT DEPTH = 3.12"
 FACEPLATE WIDTH = 2.50"




2 RECEPTACLES


2 RECEPTACLES
 1 DUAL USB PORT





4 RECEPTACLES




4 RECEPTACLES
 1 DUAL USB PORT

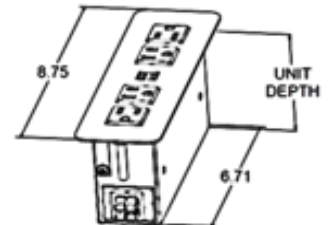

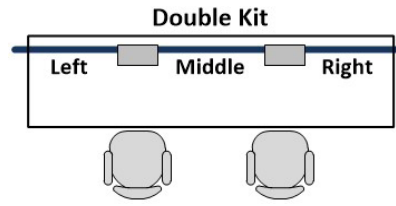

SINGLE KITS		
TABLE SIZE	LEFT FM CABLE LENGTH	RIGHT FF CABLE LENGTH
2 POWER ONLY & 2 POWER WITH DUAL USB PORT		
36"	FM-17"	FF-17"
42"	FM-20"	FF-20"
48"	FM-23"	FF-23"
54"	FM-26"	FF-26"
60"	FM-29"	FF-29"
66"	FM-31.5"	FF-31.5"
72"	FM-35"	FF-35"
84"	FM-41"	FF-41"
96"	FM-47"	FF-47"
4 POWER ONLY & 4 POWER WITH DUAL USB PORT		
36"	FM-16"	FF-16"
42"	FM-19"	FF-19"
48"	FM-22"	FF-22"
54"	FM-25"	FF-25"
60"	FM-28"	FF-28"
66"	FM-30.5"	FF-30.5"
72"	FM-34"	FF-34"
84"	FM-40"	FF-40"
96"	FM-46"	FF-46"

DOUBLE KITS			
TABLE SIZE	LEFT FM CABLE LENGTH	MIDDLE FF CABLE LENGTH	RIGHT FF CABLE LENGTH
2 POWER ONLY			
60"	FM-12"	FF-31"	FF-12"
66"	FM-12"	FF-37"	FF-12"
72"	FM-12"	FF-43"	FF-12"
84"	FM-12"	FF-49"	FF-12"
96"	FM-12"	FF-55"	FF-12"
2 POWER WITH DUAL USB PORT			
60"	FM-12"	FF-30"	FF-12"
66"	FM-12"	FF-36"	FF-12"
72"	FM-12"	FF-42"	FF-12"
84"	FM-12"	FF-48"	FF-12"
96"	FM-12"	FF-54"	FF-12"
4 POWER ONLY			
60"	FM-12"	FF-26"	FF-12"
66"	FM-12"	FF-32"	FF-12"
72"	FM-12"	FF-38"	FF-12"
84"	FM-12"	FF-44"	FF-12"
96"	FM-12"	FF-50"	FF-12"
4 POWER WITH DUAL USB PORT			
60"	FM-12"	FF-24"	FF-12"
66"	FM-12"	FF-30"	FF-12"
72"	FM-12"	FF-36"	FF-12"
84"	FM-12"	FF-42"	FF-12"
96"	FM-12"	FF-48"	FF-12"

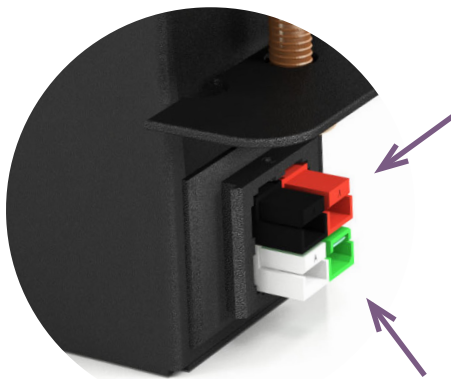

NOTE:
 All DaisyLink™ products come equipped with male-end connectors
 (Male ends extend outward)

DAISYLINK™ QUICK KITS - SINGLE KITS

	FINISH	PRODUCT NUMBER
TWO POWER		
2 POWER COVE SINGLE KIT, CLAMP-ON UNIT WITH CIRCUIT 1	SILVER BLACK WHITE BRONZE LATTE CARBON BRUSHED ALUMINIUM	COV-2-41-S- _K COV-2-41-B- _K COV-2-41-GW- _K COV-2-41-Z- _K COV-2-41-L- _K COV-2-41-C- _K COV-2-41-AL- _K
2 POWER, 1 DUAL USB COVE SINGLE KIT, CLAMP-ON UNIT WITH CIRCUIT 1	SILVER BLACK WHITE BRONZE LATTE CARBON BRUSHED ALUMINIUM	COV-2U-41-S- _K COV-2U-41-B- _K COV-2U-41GW- _K COV-2U-41-Z- _K COV-2U-41-L- _K COV-2U-41-C- _K COV-2U-41AL- _K

FOUR POWER		
4 POWER COVE SINGLE KIT, CLAMP-ON UNIT WITH CIRCUIT 1	SILVER BLACK WHITE BRONZE LATTE CARBON BRUSHED ALUMINIUM	COV-4-41-S- _K COV-4-41-B- _K COV-4-41-GW- _K COV-4-41-Z- _K COV-4-41-L- _K COV-4-41-C- _K COV-4-41-AL- _K
4 POWER, 1 DUAL USB COVE SINGLE KIT, CLAMP-ON UNIT WITH CIRCUIT 1	SILVER BLACK WHITE BRONZE LATTE CARBON BRUSHED ALUMINIUM	COV-4U-41-S- _K COV-4U-41-B- _K COV-4U-41GW- _K COV-4U-41-Z- _K COV-4U-41-L- _K COV-4U-41-C- _K COV-4U-41AL- _K


DAISYLINK™ QUICK KITS - DOUBLE KITS

	FINISH	PRODUCT NUMBER
FOUR POWER		
4 POWER COVE DOUBLE KIT, CLAMP-ON UNIT WITH CIRCUIT 1	SILVER BLACK WHITE BRONZE LATTE CARBON BRUSHED ALUMINIUM	COV-2-41-S- _DK COV-2-41-B- _DK COV-2-41-GW- _DK COV-2-41-Z- _DK COV-2-41-L- _DK COV-2-41-C- _DK COV-2-41-AL- _DK
4 POWER, 2 DUAL USB COVE DOUBLE KIT, CLAMP-ON UNIT WITH CIRCUIT 1	SILVER BLACK WHITE BRONZE LATTE CARBON BRUSHED ALUMINIUM	COV-2U-41-S- _DK COV-2U-41-B- _DK COV-2U-41GW- _DK COV-2U-41-Z- _DK COV-2U-41-L- _DK COV-2U-41-C- _DK COV-2U-41AL- _DK

EIGHT POWER		
8 POWER COVE DOUBLE KIT, CLAMP-ON UNIT WITH CIRCUIT 1	SILVER BLACK WHITE BRONZE LATTE CARBON BRUSHED ALUMINIUM	COV-4-41-S- _DK COV-4-41-B- _DK COV-4-41-GW- _DK COV-4-41-Z- _DK COV-4-41-L- _DK COV-4-41-C- _DK COV-4-41-AL- _DK
8 POWER, 1 DUAL USB COVE DOUBLE KIT, CLAMP-ON UNIT WITH CIRCUIT 1	SILVER BLACK WHITE BRONZE LATTE CARBON BRUSHED ALUMINIUM	COV-4U-41-S- _DK COV-4U-41-B- _DK COV-4U-41GW- _DK COV-4U-41-Z- _DK COV-4U-41-L- _DK COV-4U-41-C- _DK COV-4U-41AL- _DK

DAISYLINK™ COMPONENTS

SELECT YOUR STARTER INFEED OPTION:

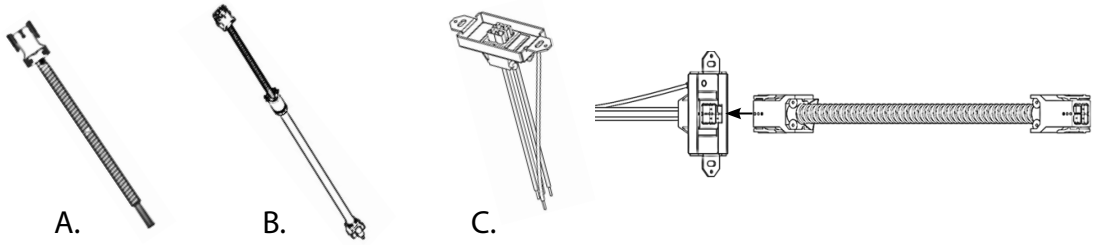

		LENGTH/FINISH	PRODUCT NUMBER
A.	Hardwired multi-circuit starter infeed with female DaisyLink™ connector; hardwires into electrical junction box *Specify in increments of 1" Cable Lengths in Part Number	12" Min - 180" Max	42 SB2-XXX*
B.	Molded 3-prong plug single-circuit starter power infeed with female DaisyLink™ connector; plugs directly into wall or floor outlet	72"	42 20AP1-72
C.	Quick Disconnect multi-circuit wall/floor insert with male DaisyLink™ connector; wires into junction box to accept female DaisyLink™ interconnecting cable (To be used with 42 FF-XXX interconnecting cable)	Black	42 QD Insert

TO LEARN HOW TO CONFIGURE AND ASSEMBLE A 4 WIRE 2 CIRCUIT SYSTEM, SEE DAISYLINK™ SYSTEM LITERATURE FOR DETAILS - OR CONTACT OUR KNOWLEDGEABLE CUSTOMER SERVICE TEAM FOR ADDITIONAL SUPPORT

MOUNTING ACCESSORIES

	FINISH	PRODUCT NUMBER
Optional mounting bracket for table thicknesses up-to 1.50"	Black	COV-1.5-BRKT

PRODUCT NOTES:

REPLACE _ IN SINGLE KIT (K) PRODUCT NUMBERS WITH 36, 42, 48, 54, 60, 66, 72, 84, 96 FOR SPECIFIED TABLE LENGTH
 REPLACE _ IN DOUGLE KIT (DK) PRODUCT NUMBERS WITH 60, 66, 72, 84, 96 FOR SPECIFIED TABLE LENGTH
 CHANGE THE -41 TO -42 IN PART NUMBER TO SPECIFY CIRCUIT 2 CONFIGURATIONS
 SCREW-MOUNT CONFIGURATIONS AVAILABLE UPON REQUEST- CONTACT US FOR MORE DETAILS
 CALL FOR PRICING



EIGHT POWER

2 POWER COVE SINGLE KIT, CLAMP-ON UNIT WITH CIRCUIT 1	SILVER BLACK WHITE BRONZE LATTE CARBON BRUSHED ALUMINIUM	COV-2-41-S-_K COV-2-41-B-_K COV-2-41-GW-_K COV-2-41-Z-_K COV-2-41-L-_K COV-2-41-C-_K COV-2-41-AL-_K
2 POWER, 1 DUAL USB COVE SINGLE KIT, CLAMP-ON UNIT WITH CIRCUIT 1	SILVER BLACK WHITE BRONZE LATTE CARBON BRUSHED ALUMINIUM	COV-2U-41-S-_K COV-2U-41-B-_K COV-2U-41GW-_K COV-2U-41-Z-_K COV-2U-41-L-_K COV-2U-41-C-_K COV-2U-41AL-_K